



BUILDING-1



Win1

50.0.0.10

WINDOWS PASSWORD : Test123

BUILDING-2



Win2

50.0.0.20

WINDOWS PASSWORD : Test123

e0

e0



QEMU (Win1)



C:\Windows\system32\CMD.exe

C:\Users\user>IPCONFIG

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
Link-local IPv6 Address : fe80::2ceb:ccb5:788:1e35%11
IPv4 Address. : 50.0.0.10
Subnet Mask : 255.0.0.0
Default Gateway :

Tunnel adapter isatap.{42A1F8B7-30A8-4EF7-81AF-C694F5F3D81B}:

Media State : Media disconnected
Connection-specific DNS Suffix . :

Tunnel adapter 6T04 Adapter:

Connection-specific DNS Suffix . :
IPv6 Address. : 2002:3200:a::3200:a
Default Gateway :

C:\Users\user>

Administrator: C:\Windows\system32\cmd.exe

C:\Users\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
Link-local IPv6 Address : fe80::35fd:cc8:9b31:c87e%11
IPv4 Address. : 50.0.0.20
Subnet Mask : 255.0.0.0
Default Gateway :


Tunnel adapter isatap.{42A1F8B7-30A8-4EF7-81AF-C694F5F3D81B}:

Media State : Media disconnected
Connection-specific DNS Suffix . :

Tunnel adapter 6T04 Adapter:

Connection-specific DNS Suffix . :
IPv6 Address. : 2002:3200:14::3200:14
Default Gateway :

C:\Users\user>

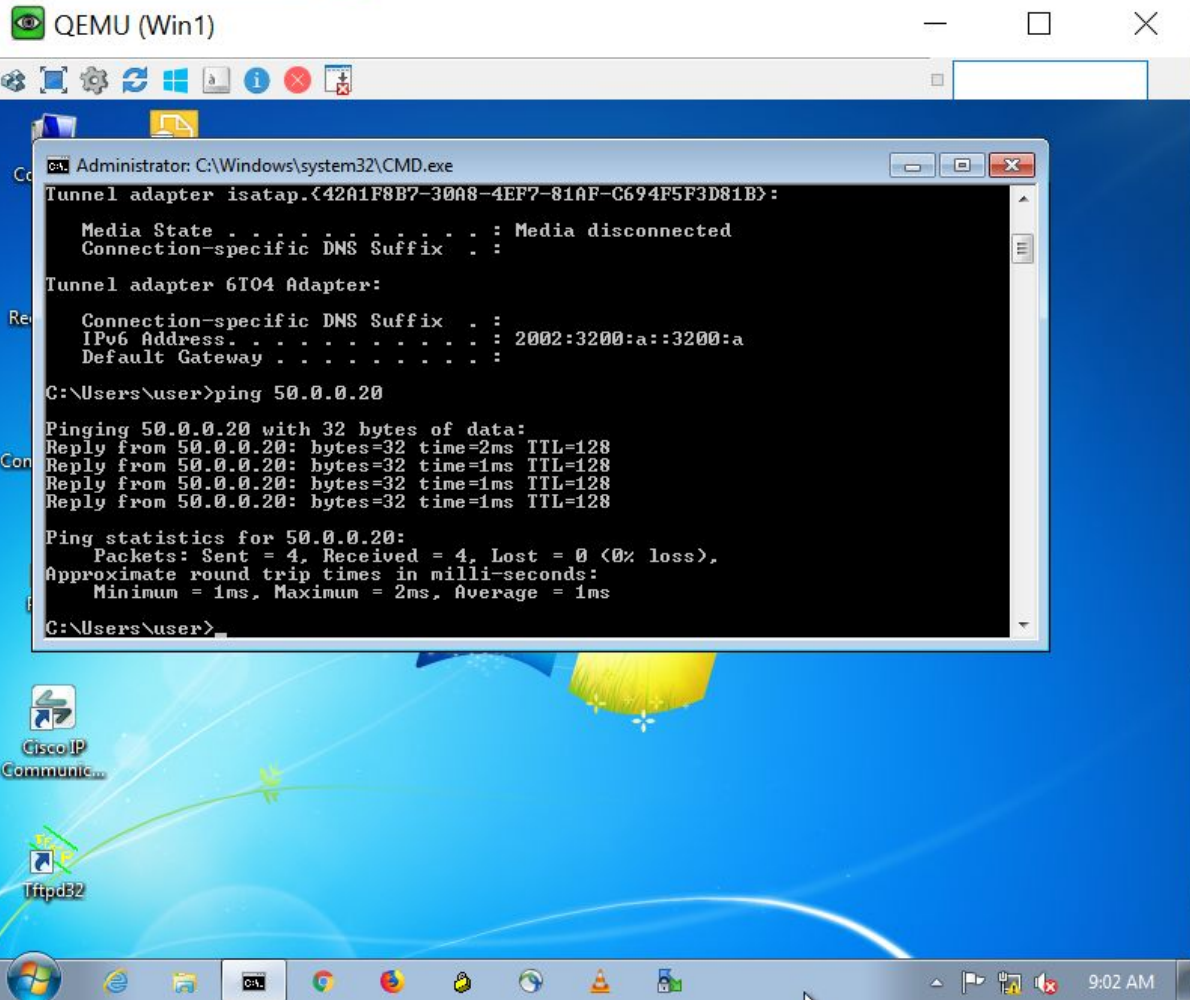

Administrator: C:\Windows\system32\cmd.exe

Tunnel adapter isatap.{42A1F8B7-30A8-4EF7-81AF-C694F5F3D81B}:

Media State : Media disconnected
Connection-specific DNS Suffix . :

Tunnel adapter 6T04 Adapter:

Connection-specific DNS Suffix . :
IPv6 Address. : 2002:3200:14::3200:14
Default Gateway :

C:\Users\user>ping 50.0.0.10

Pinging 50.0.0.10 with 32 bytes of data:
Reply from 50.0.0.10: bytes=32 time=1ms TTL=128
Reply from 50.0.0.10: bytes=32 time<1ms TTL=128
Reply from 50.0.0.10: bytes=32 time<1ms TTL=128
Reply from 50.0.0.10: bytes=32 time<1ms TTL=128

Ping statistics for 50.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Users\user>

/topology



QEMU (Win1)

C:\Windows\system32\cmd.exe

```
Pinging 50.0.0.10 with 32 bytes of data:  
Reply from 50.0.0.10: bytes=32 time<1ms TTL=128  
Reply from 50.0.0.10: bytes=32 time<1ms TTL=128  
Reply from 50.0.0.10: bytes=32 time<1ms TTL=128  
Reply from 50.0.0.10: bytes=32 time<1ms TTL=128
```

```
Ping statistics for 50.0.0.10:  
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

C:\Users\user>ping sys2

```
Pinging sys2 [fe80::35fd:cc8:9b31:c87e%11] with 32 bytes of data:  
Reply from fe80::35fd:cc8:9b31:c87e%11: time=1ms  
Reply from fe80::35fd:cc8:9b31:c87e%11: time=1ms  
Reply from fe80::35fd:cc8:9b31:c87e%11: time=1ms  
Reply from fe80::35fd:cc8:9b31:c87e%11: time=1ms
```

```
Ping statistics for fe80::35fd:cc8:9b31:c87e%11:  
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 1ms, Maximum = 1ms, Average = 1ms
```

C:\Users\user>