


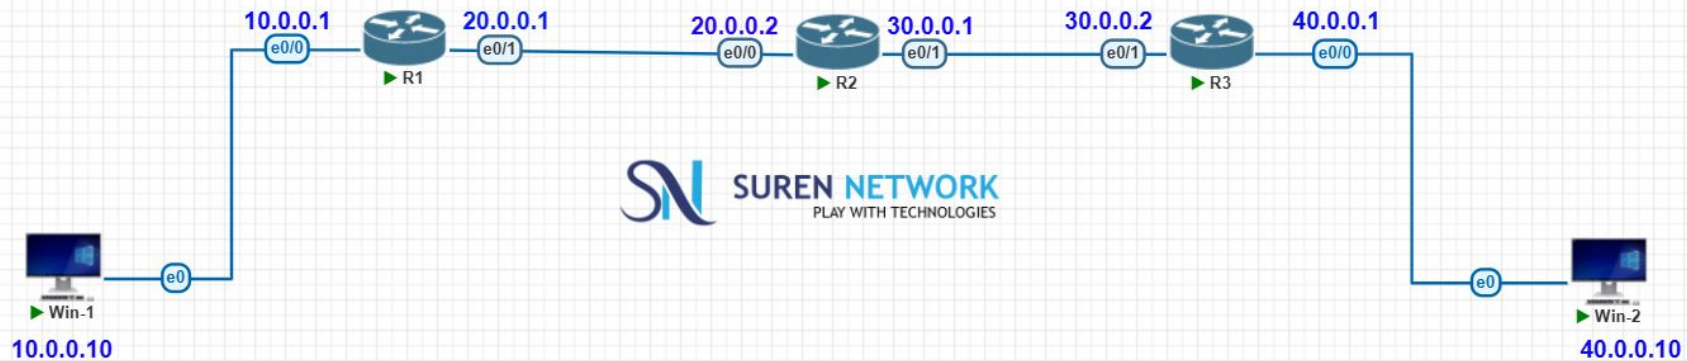

```
ROUTER#sh ip route
```

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, * - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP  
a - application route  
+ - replicated route, % - next hop override, p - overrides from PfR
```


```
Gateway of last resort is not set
```

```
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks  
C      10.0.0.0/8 is directly connected, Ethernet0/0  
L      10.0.0.1/32 is directly connected, Ethernet0/0  
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks  
C      20.0.0.0/8 is directly connected, Ethernet0/1  
L      20.0.0.1/32 is directly connected, Ethernet0/1
```

```
ROUTER#
```



R2



ROUTER1#

ROUTER1#sh ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area

N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2

E1 - OSPF external type 1, E2 - OSPF external type 2

i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2

ia - IS-IS inter area, * - candidate default, U - per-user static route

o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP

a - application route

+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 20.0.0.0/8 is directly connected, Ethernet0/0

L 20.0.0.2/32 is directly connected, Ethernet0/0

30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 30.0.0.0/8 is directly connected, Ethernet0/1

L 30.0.0.1/32 is directly connected, Ethernet0/1

ROUTER1#



R3



ROUTER2#

ROUTER2#sh ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area

N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2

E1 - OSPF external type 1, E2 - OSPF external type 2

i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2

ia - IS-IS inter area, * - candidate default, U - per-user static route

o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP

a - application route

+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 30.0.0.0/8 is directly connected, Ethernet0/0

L 30.0.0.2/32 is directly connected, Ethernet0/0

40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 40.0.0.0/8 is directly connected, Ethernet0/1

L 40.0.0.1/32 is directly connected, Ethernet0/1

ROUTER2#

QEMU (Win-1)



My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-I...

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 10.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

C:\Documents and Settings\user>
```




QEMU (Win-2)



My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix	:	:
IP Address	:	20.0.0.1
Subnet Mask	:	255.0.0.0
Default Gateway	:	:

C:\Documents and Settings\user>_



Documents

Computer

My Network Places

Recycle Bin

Internet Explorer

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix	:	:
IP Address	:	10.0.0.10
Subnet Mask	:	255.0.0.0
Default Gateway	:	10.0.0.1

C:\Documents and Settings\user>



QEMU (Win-2)

