


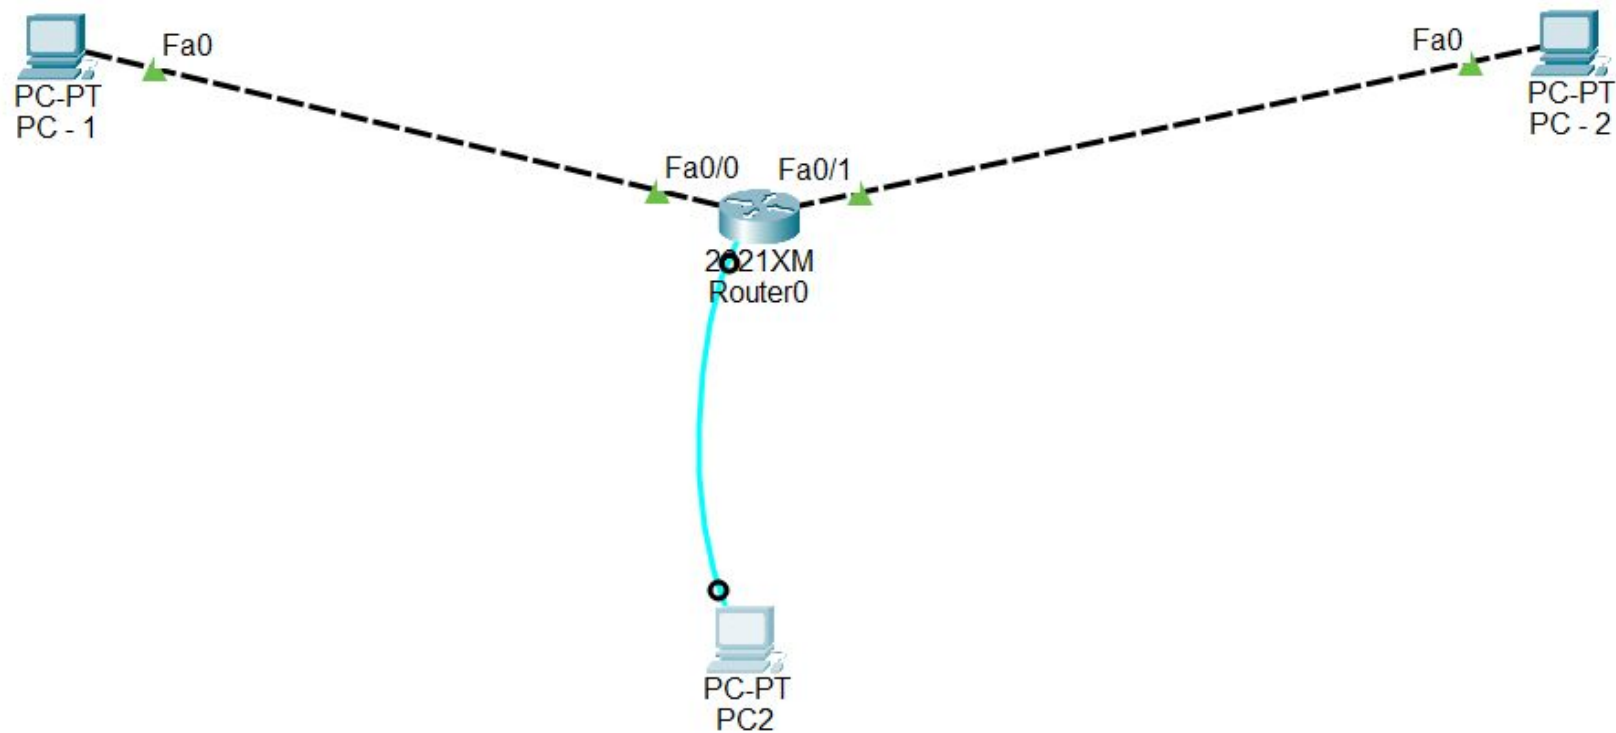

Terminal

```
Processor board ID JAD0S190M1Z (4292891493)
M860 processor: part number 0, mask 49
Bridging software.
X.25 software, Version 3.0.0.
4 FastEthernet/IEEE 802.3 interface(s)
4 Low-speed serial(sync/async) network interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)
```

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ho ROUTER
ROUTER(config)#int f0/0
ROUTER(config-if)#ip add 50.0.0.1 255.0.0.0
ROUTER(config-if)#no sh

ROUTER(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
exit
ROUTER(config)#int f0
ROUTER(config)#int f0/1
ROUTER(config-if)#ip add 60.0.0.1 255.0.0.0
ROUTER(config-if)#no sh

ROUTER(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
exit
```

```
ROUTER#sh ip route
```

```
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP  
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area  
* - candidate default, U - per-user static route, o - ODR  
P - periodic downloaded static route
```

```
Gateway of last resort is not set
```

```
C    50.0.0.0/8 is directly connected, FastEthernet0/0  
C    60.0.0.0/8 is directly connected, FastEthernet0/1
```

```
ROUTER#
```

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\>ping 60.0.0.10

Ping request could not find host 60.0.0.10. Please check the name and try again.

C:\>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:

Request timed out.

Reply from 60.0.0.10: bytes=32 time<1ms TTL=127

Reply from 60.0.0.10: bytes=32 time<1ms TTL=127

Reply from 60.0.0.10: bytes=32 time<1ms TTL=127

Ping statistics for 60.0.0.10:

Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|

