


USB-C 5 V INPUT: CC pull-downs, PTC, TVS; mains-present sense

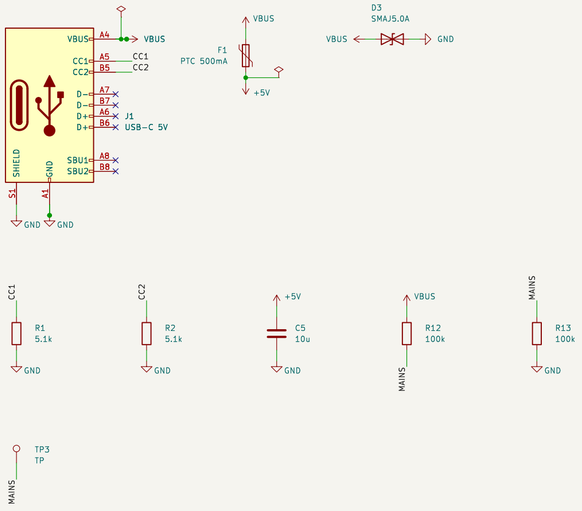


POWER: 3.3 V LDO, battery backup diode-OR

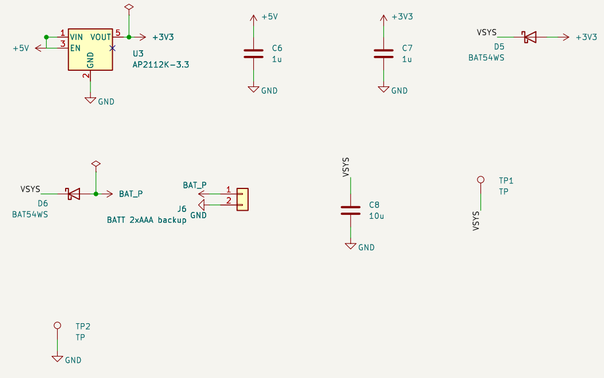


MCU: ATmega328P-AU, 4 MHz

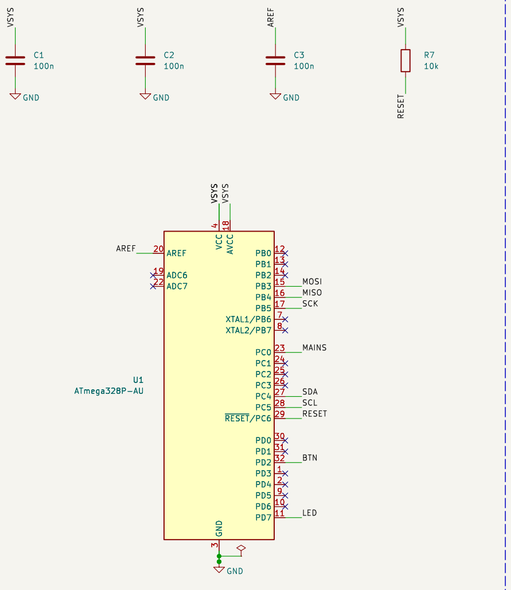

I2C: OLED + RTC



USER + PROGRAMMING

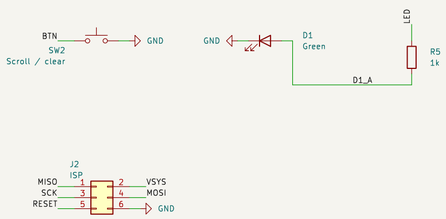

VSYS = USB-derived 3.3 V or the 2xAAA backup, whichever is higher (Schottky OR, about 0.3 V drop). When VBUS disappears MAINS goes low; the firmware logs the cut start; when it returns it logs the duration. RTC module keeps wall-clock time.

First engineering release; see pcb/README.md for status and limits

ClaudeWork

Sheet: /

File: bijli_log.kicad_sch

Title: Bijli Log (power-cut logger) — main board

Size: A2	Date: 2026-11-01	**Rev: B**
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 1/1