



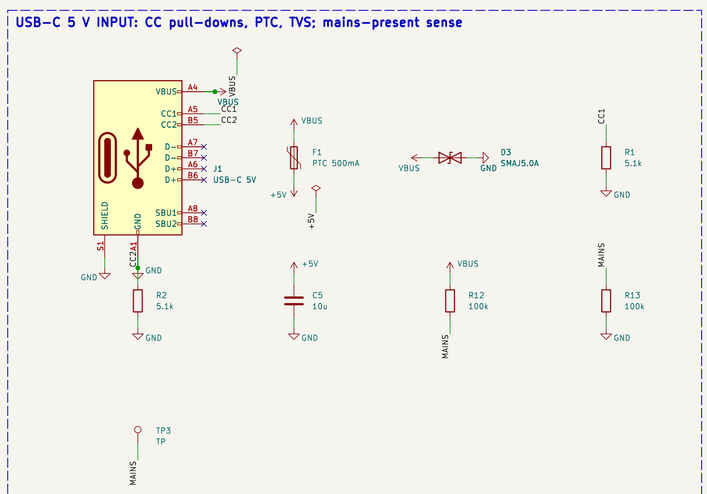


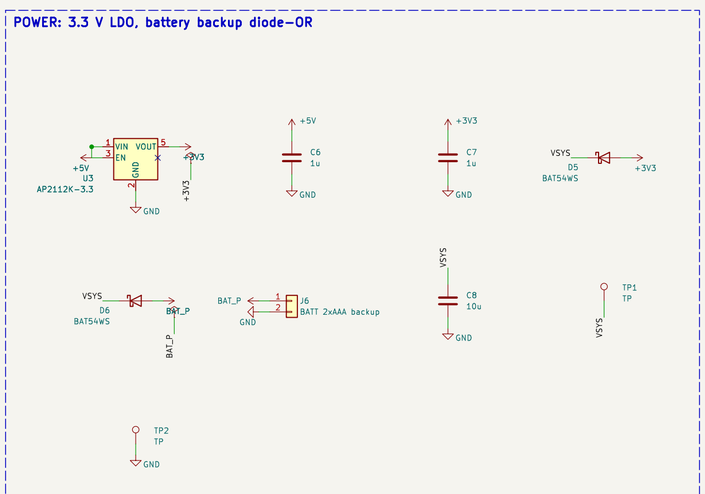

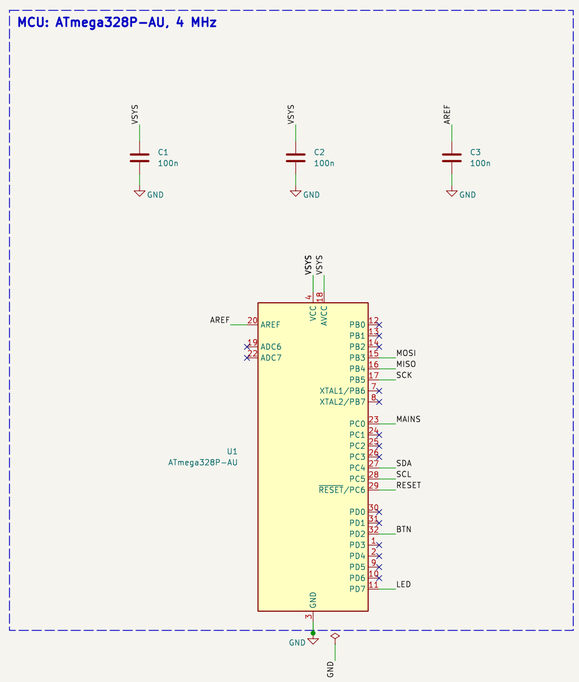

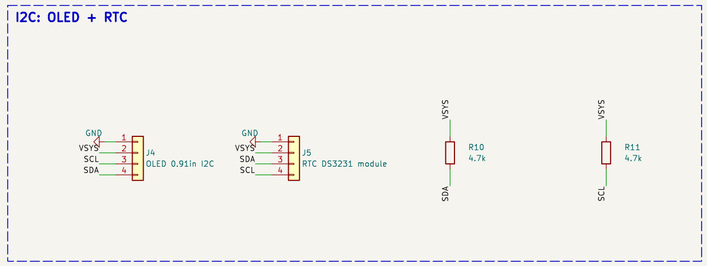

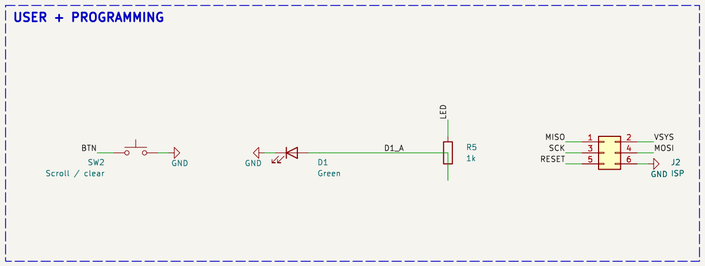

VSYS = USB-derived 3.3 V or the 2×AAA backup, whichever is higher (Schottky OR, about 0.3 V drop). When VBUS disappears MAINS goes low; the firmware logs the cut start; when it returns it logs the duration. RTC module keeps wall-clock time.

First engineering release; see pcb/README.md for status and limits

ClaudeWork

Sheet: /

File: bijli_log.kicad_sch

Title: Bijli Log (power-cut logger) — main board

Size: A2	Date: 2026-11-01	**Rev: B**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1