


POWER INPUT: 3xAA, switch, reverse-polarity PMOS




MCU: ATmega328P-AU

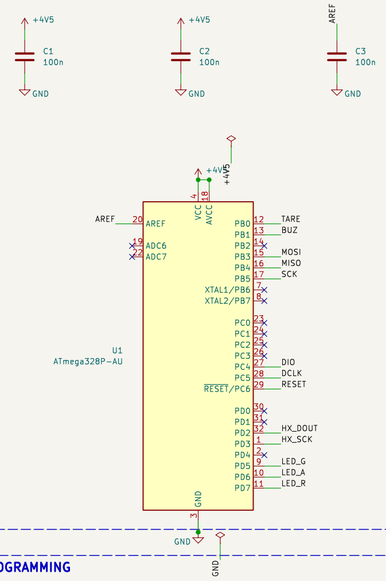

WEIGH-CELL ADC: HX711 24-bit, load-cell bridge input

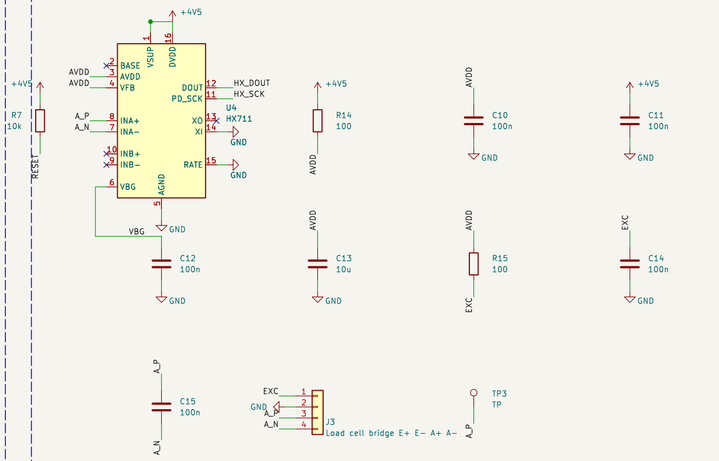

ALARM + LEVEL LEDS + TARE

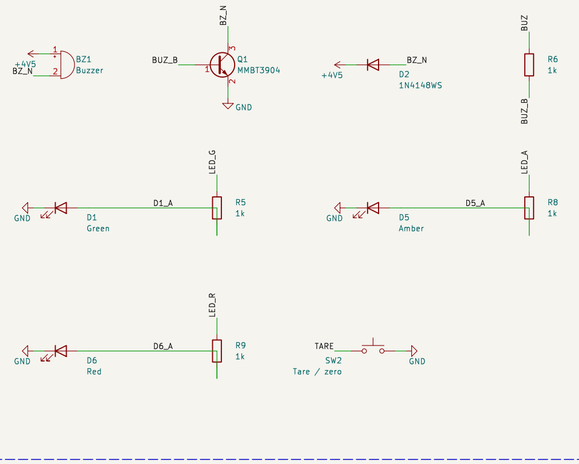

DISPLAY + PROGRAMMING



Four 50 kg half-bridge load cells under the 33 cm plate are wired into one full bridge at the plate (E+, E−, A+, A−). HX711 channel A, gain 128, 10 SPS, powered at 4.5 V (2.6–5.5 V allowed); AVDD through R14/C10, VFB tied to AVDD, BASE not used.

This product measures WEIGHT only: it is not a gas leak detector.

First engineering release; see pcb/README.md for status and limits

ClaudeWork

Sheet: /

File: gas_taraju.kicad_sch

Title: Gas Taraju (LPG cylinder scale) — main board

Size: A2	Date: 2026-11-01	**Rev: B**
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 1/1