


POWER INPUT: 3xAAA, switch, reverse-polarity PMOS

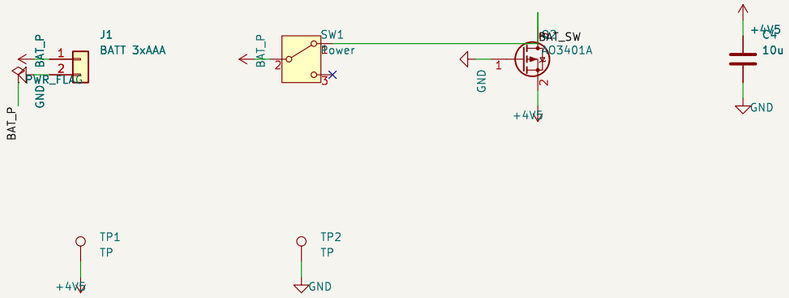


MCU: ATmega328P-AU

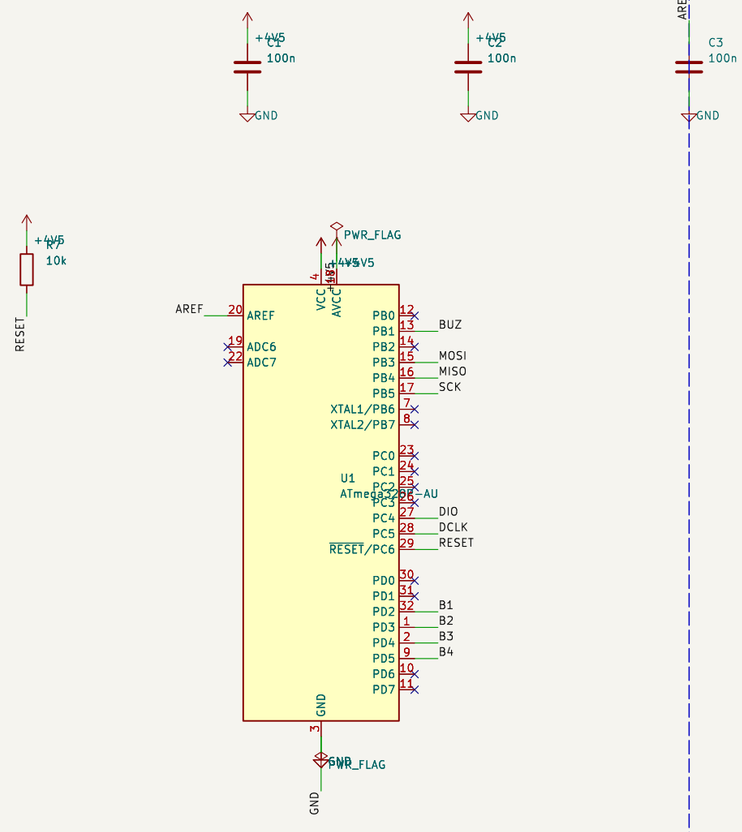


CHANNEL BUTTONS (tap +1 min, hold 1 s = clear)



ALARM: buzzer

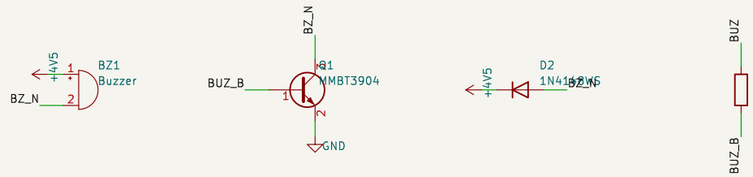

DISPLAY + PROGRAMMING



Display: 4-digit standard TM1637 6-digit module on J4 (shows the soonest channel mm:ss and the channel number). Each channel button adds 1 minute; a ringing channel is silenced by its own button.

First engineering release; see pcb/README.md for status and limits

ClaudeWork

Sheet: /
File: chulha_timers.kicad_sch

Title: Chulha Timers — main board

Size: A3	Date: 2026-11-01	**Rev: B**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1