


POWER: 3xAAA, switch, reverse-polarity PMOS, 3.3 V LDO, LED supply diode, battery divider

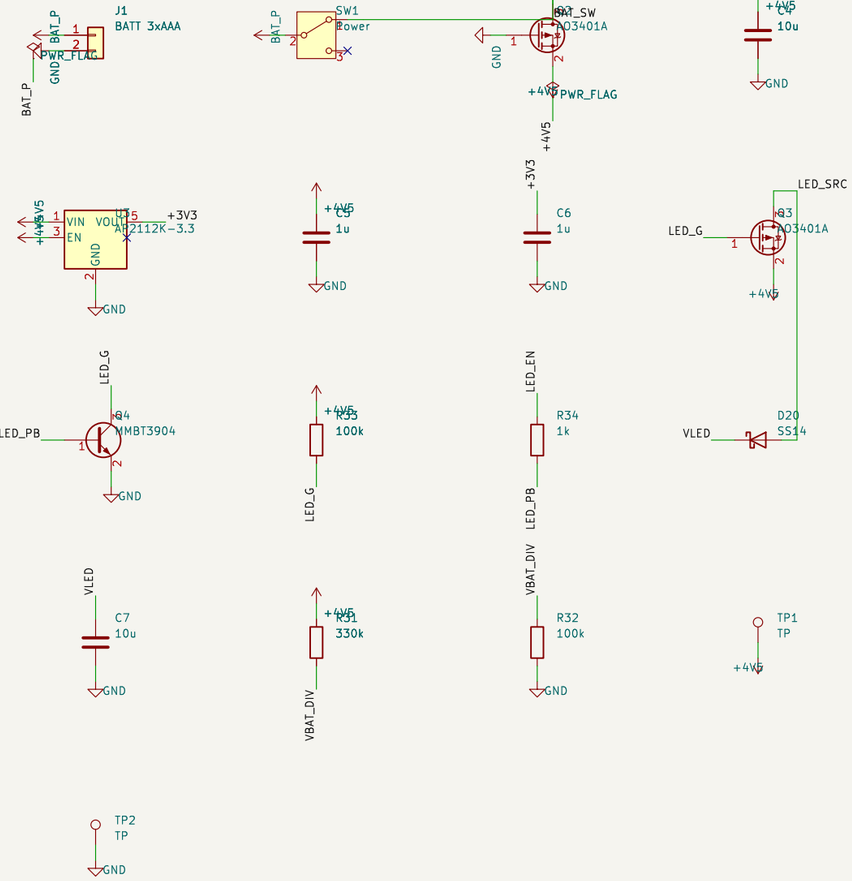

MCU: ATmega328P-AU, 3.3 V, 8 MHz internal

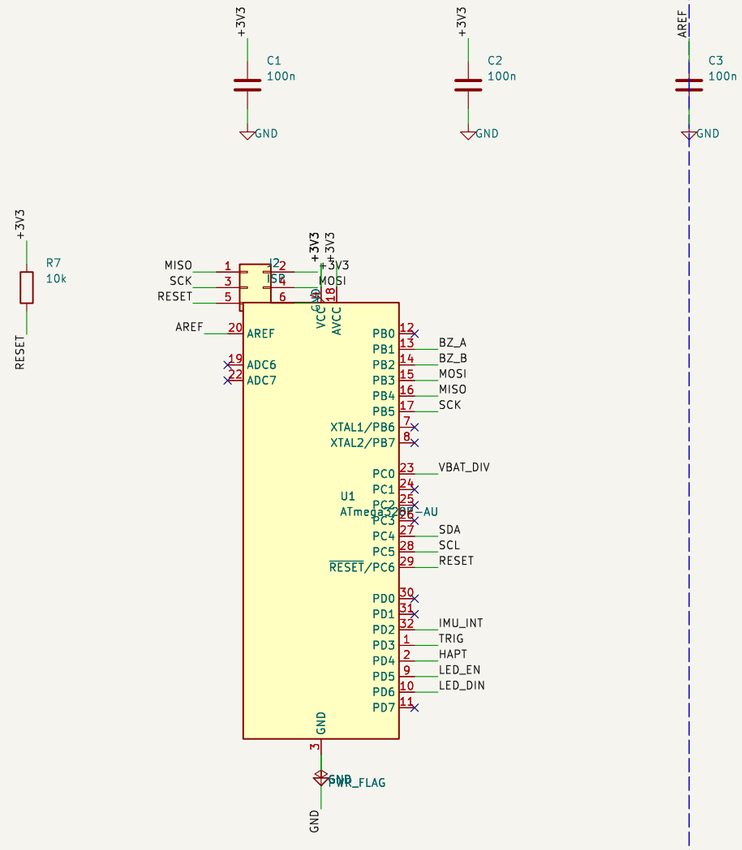

MOTION: MPU-6050 6-axis IMU on I2C

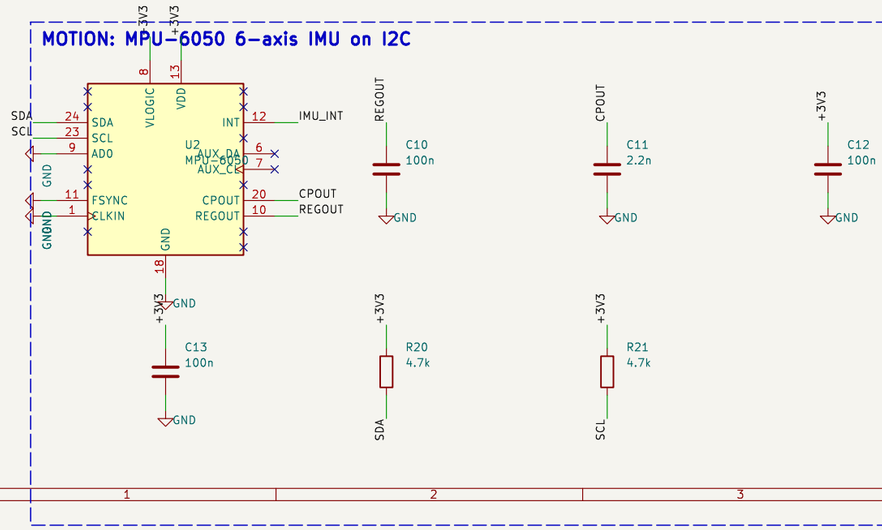

LIGHT: six WS2812B-Mini pixels (daisy chain), each with 100 nF

First engineering release; see pcb/README.md for status and limits

ClaudeWork

Sheet: /

File: astradand_main.kicad_sch

Title: ASTRADAND gesture wand — main board

Size: A3	Date: 2026-11-01	**Rev: A**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1