

ADXL345 vibration sensor, SPI

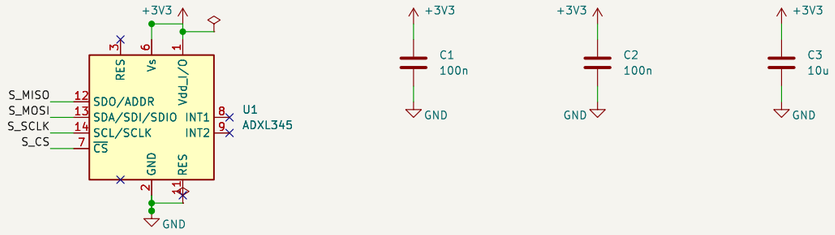

CONNECTOR (same pinout as the controller sensor header)



KINETIC vibration puck: screw or glue flat to the motor end-cap (rigid, short path to the bearing). ADXL345 in SPI mode 3, 3200 Hz output data rate, +-16 g full resolution. Keep the cable under 30 cm.

First engineering release; see pcb/README.md for status and limits

ClaudeWork

Sheet: /		
File: kinetic_vib.kicad_sch		
Title: KINETIC vibration puck (ADXL345, SPI)		
Size: A3	Date: 2026-11-01	**Rev: A**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1