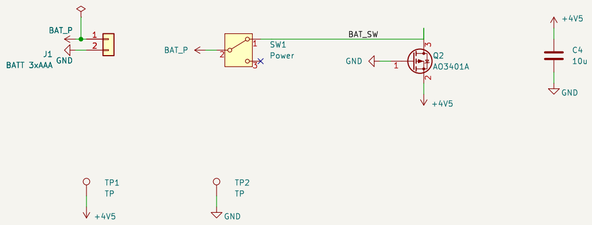
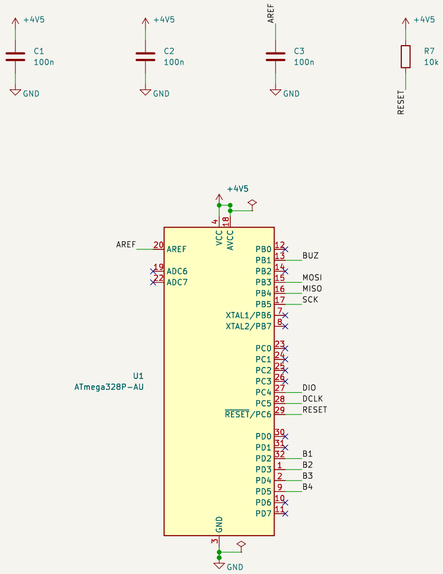
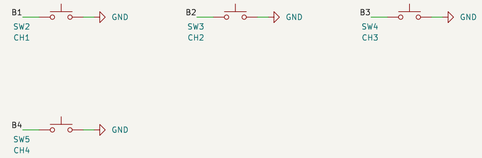
## POWER INPUT: 3xAAA, switch, reverse-polarity PMOS



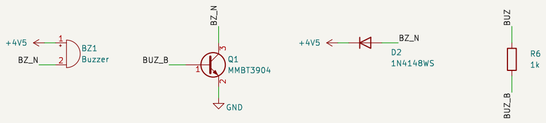

## MCU: ATmega328P-AU



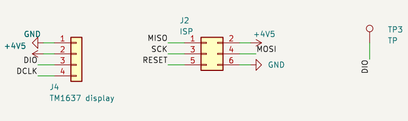

## CHANNEL BUTTONS (tap +1 min, hold 1 s = clear)




## ALARM: buzzer




## DISPLAY + PROGRAMMING




Display: a standard TM1637 6-digit module on J4 (shows the soonest channel mm:ss and the channel number). Each channel button adds 1 minute; a ringing channel is silenced by its own button.

First engineering release; see pcb/README.md for status and limits

**ClaudeWork**

Sheet: /

File: chulha_timers.kicad_sch

***Title: Chulha Timers — main board***

| Size: A2 | Date: 2026-11-01 | **Rev: B** |
|---|---|---|
| KiCad E.D.A. | kicad-cli 7.0.11+dfsg-1build4 | Id: 1/1 |