


POWER INPUT: 3xAAA, switch, reverse-polarity PMOS

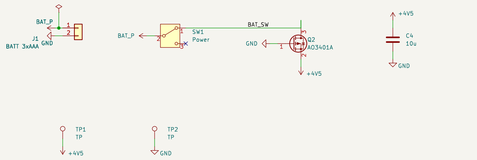


MCU: ATmega328P-AU

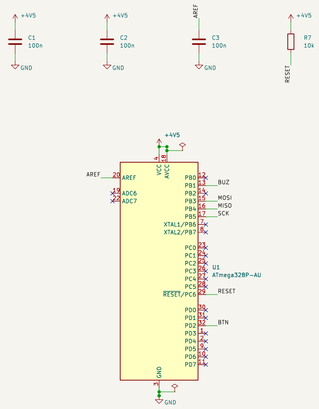


SHIFT REGISTERS 2 x 74HC595 -> 16 LEDs

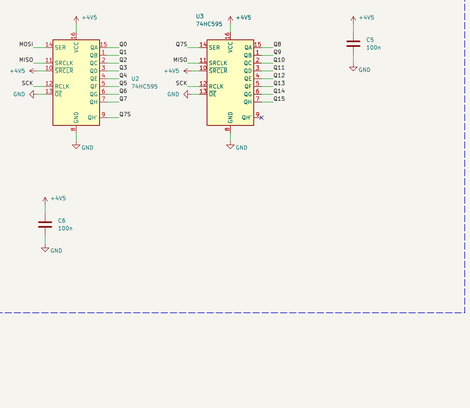

LEDS

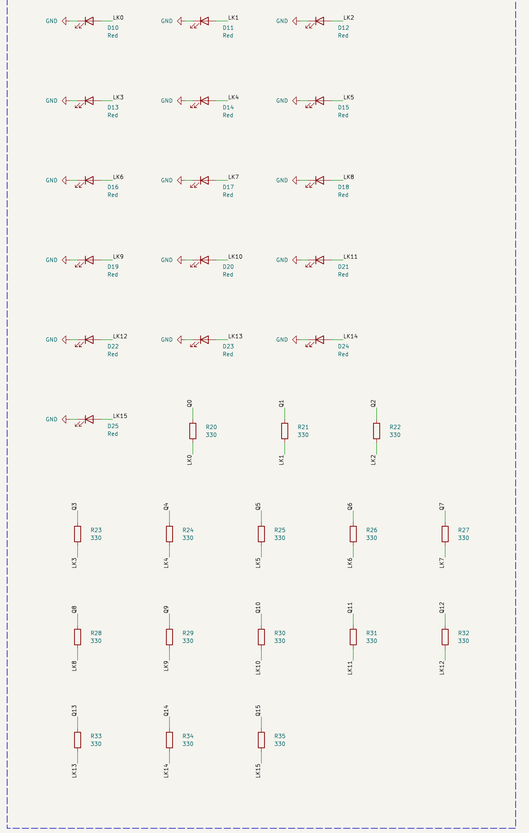

BUTTON, BUZZER, PROGRAMMING

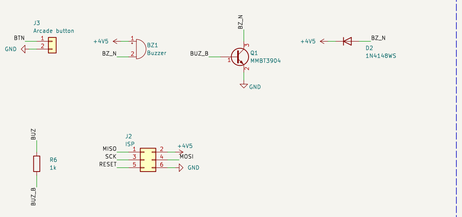

Beat Runner: 16 LEDs in a row on two cascaded 74HC595 (data on D11, shift clock D12, latch D13 as in firmware;
shared with the ISP header). Notes scroll toward LED 0; press the big arcade button on time.

First engineering release; see pcb/README.md for status and limits

ClaudeWork

Sheets: /

Files: beat_runner.kicad_sch

Title: Beat Runner — main board

Size: A1	Date: 2026-11-01	**Rev: A**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1