


POWER INPUT: 3xAAA, switch, reverse-polarity PMOS

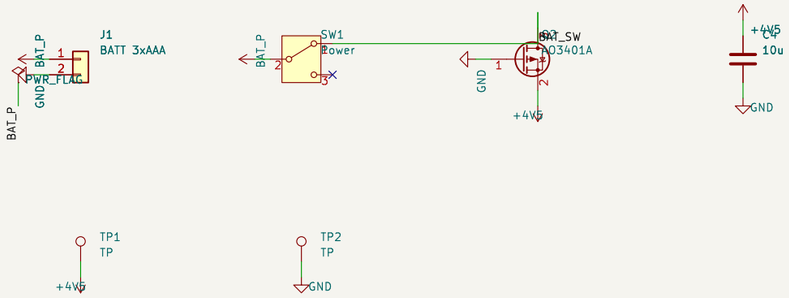


MCU: ATmega328P-AU. Hold button 2 / 3 at power-on to pick Taal Memory / Aloo Bomb

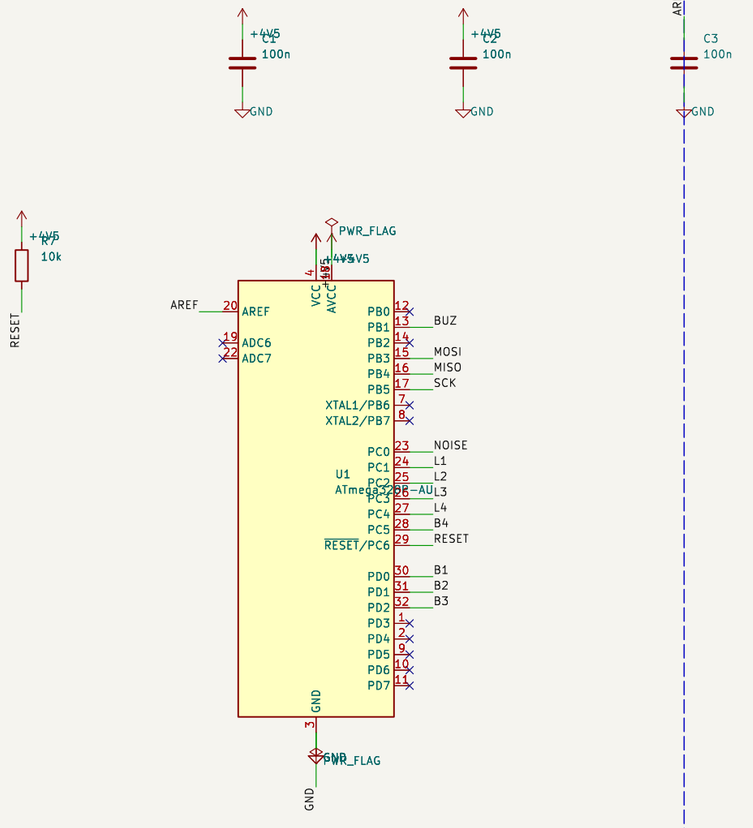

ARCADE BUTTONS + LAMPS (30 mm buttons with LED)

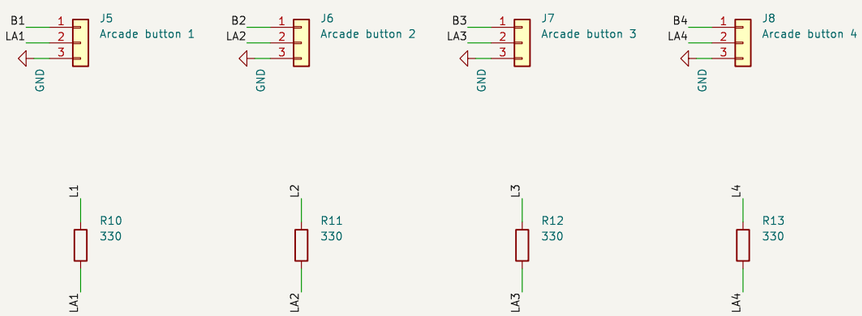

ALARM: buzzer

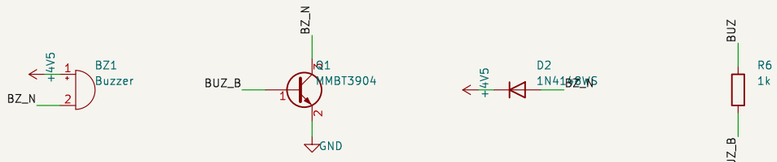

~~Desi Arcade: three games (Reflex Raja, Taal Memory, Aloo Bomb) on one board. NOISE node = VCC/2 divider; its ADC noise seeds~~ the random generator and measures the battery.

RANDOM SEED / BATTERY DIVIDER + PROGRAMMING

First engineering release; see pcb/README.md for status and limits

ClaudeWork

Sheet: /
File: desi_arcade.kicad_sch

Title: Desi Arcade — main board

Size: A3	Date: 2026-11-01	**Rev: B**
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 1/1