


POWER INPUT: 3xAA, switch, reverse-polarity PMOS

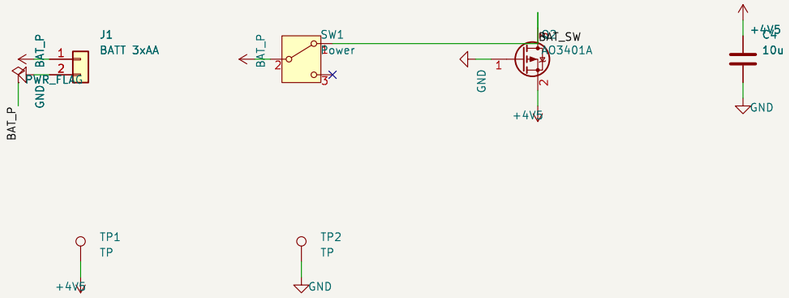


MCU: ATmega328P-AU, wakes on flow pulses

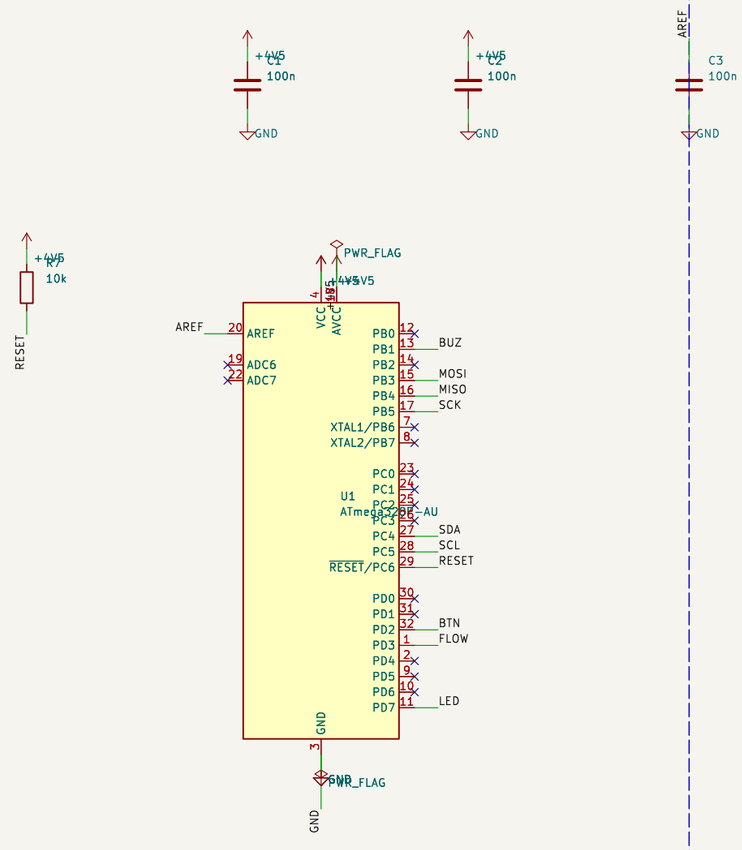

FLOW SENSOR INPUT (hall, 3-wire)

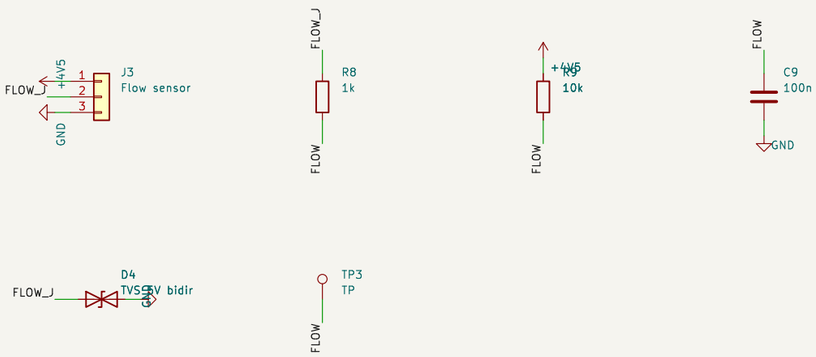

ALARM, LED, BUTTON

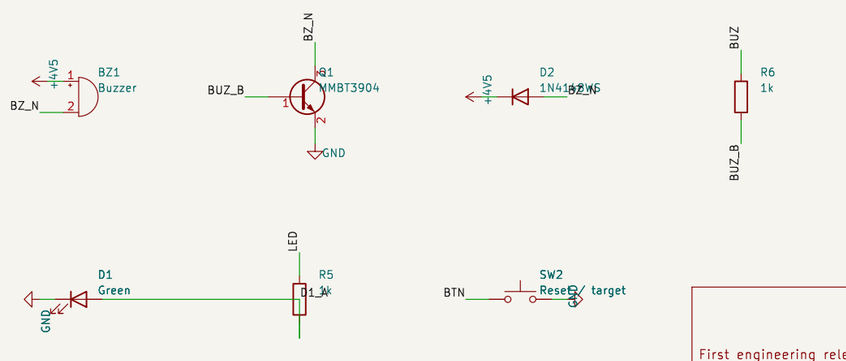

DISPLAY (OLED I2C) + PROGRAMMING

~~Flow sensor must be a 3.5–24 V type (e.g. YF-S201C class) because 3xAA falls to about 3.6 V; pulses per litre (about 450) are calibrated with a 10 L bucket. SIG is pulled up by R9 and filtered by C9.~~

First engineering release; see pcb/README.md for status and limits

ClaudeWork

Sheet: /

File: tap_litre_meter.kicad_sch

Title: Tap Litre Meter — main board

~~Size: A3~~	~~Date:~~ 2026-11-01	**Rev: B**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1