
BioTray vertical-farm tray controller (ESP32-S3, MQTT) rev A - 100 × 80 mm

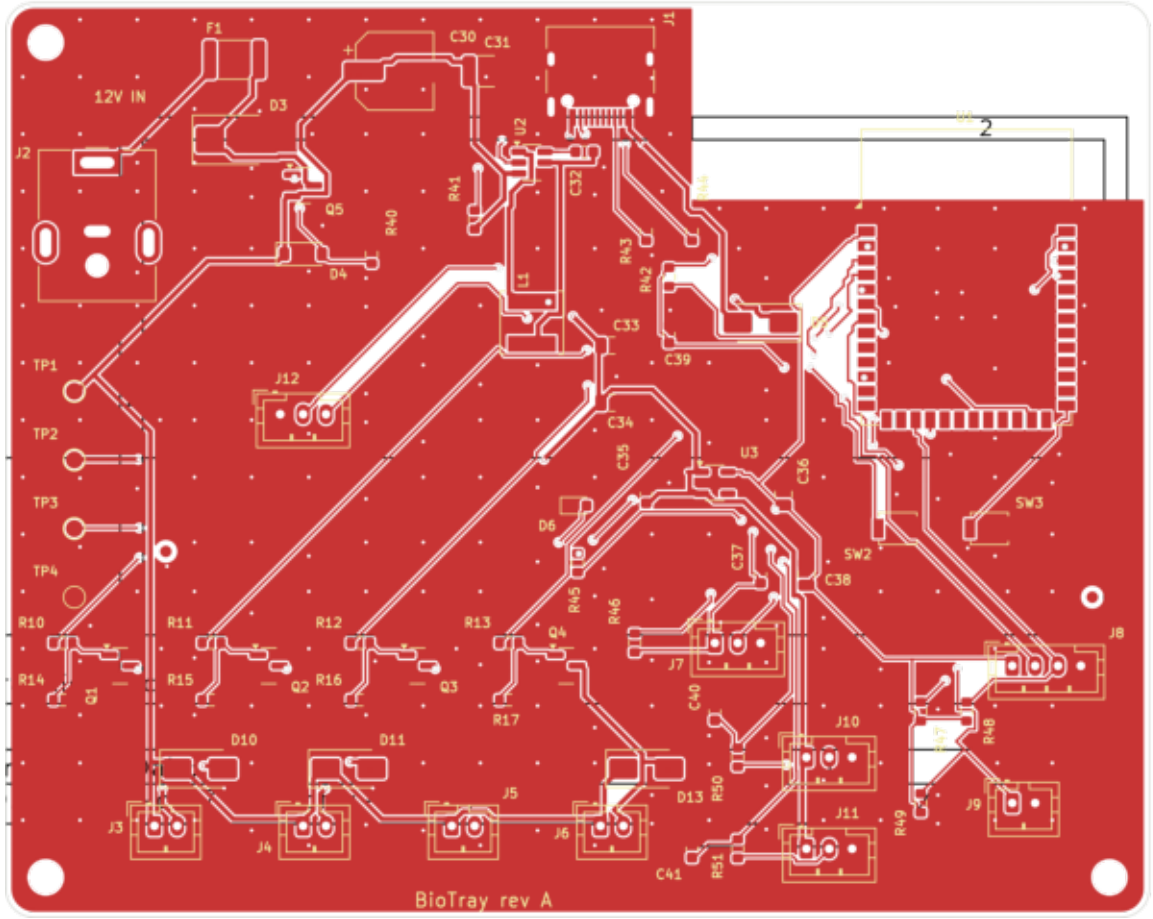

FABRICATION NOTES
1. Material: FR-4 TG135, 2 layers, finished thickness 1.6 mm +-10
2. Copper: 1 oz (35 um) finished, both sides.
3. Finish: HASL lead-free or ENIG.
4. Solder mask: green, both sides.
5. Silkscreen: white, top.
6. Min track/space 0.2/0.2 mm (power 0.4 mm); min via 0.6/0.3 mm;
7. Outline: Edge.Cuts, 2.0-2.5 mm corner radii; tolerance +-0.2 m
8. IPC-6012 class 2; 100 % electrical test (netlist in Gerber job
9. No panelisation specified: add 5 mm rails / V-score if the ass
10. Date code / vendor marking: place in silkscreen area only.

Tool	Dia (mm)	Count
PTH:1	0.30	307
PTH:2	0.60	4
PTH:3	0.75	26
PTH:4	1.00	4
PTH:5	0.65	2
PTH:6	1.60	1
PTH:7	2.70	3

Files: Gerber X2 (F/B Cu, Mask, Paste, Silk, Edge) + Excellon drill in the zip. Board origin = lower-left of Edge.Cuts after fab import; KiCad origin is top-left, y down.