


Touch Based Display Design

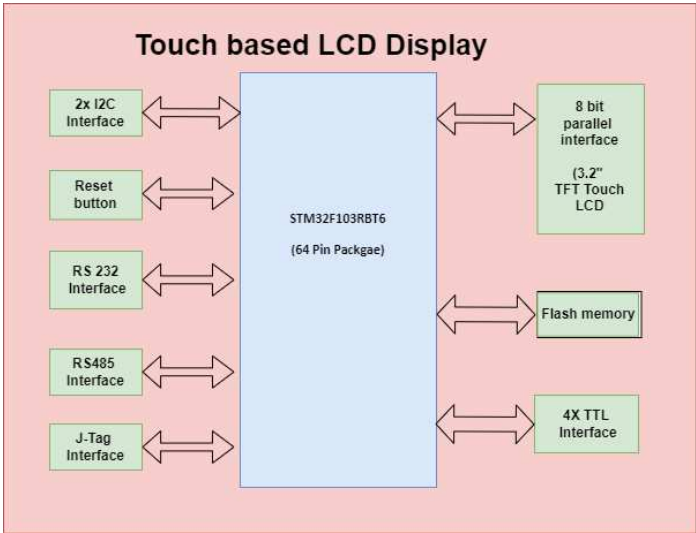


REVISION HISTORY

DATE	DESCRIPTION	REVISION
1/March/2024	Initial release	1.0



Title			
<Title>			
Size	Document Number	Rev	
A3	<Doc>	1.0	
Date:	Sunday, March 24, 2024	Sheet	1 of 5

Up to two I2C interfaces (SMBus/PMBus®)
 - Up to three USARTs (ISO 7816 interface,
 LIN, IrDA capability, modem control)
 - Up to two SPIs (8 Mbit/s)
 - CAN interface (2.0B Active)
 - USB 2.0 full-speed interface


STM32

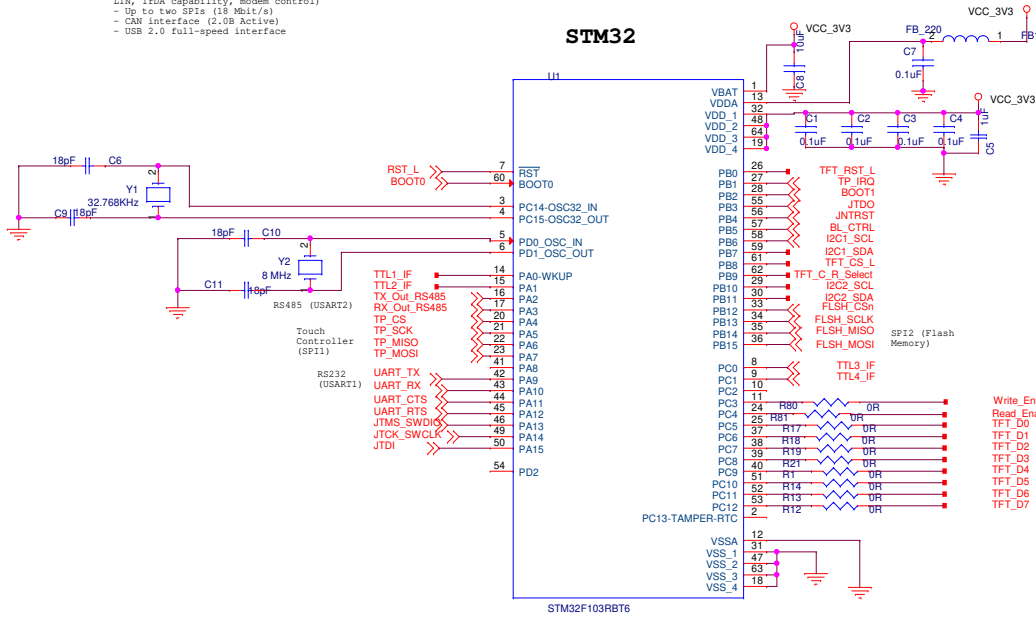


J-TaG Section



Reset circuitry


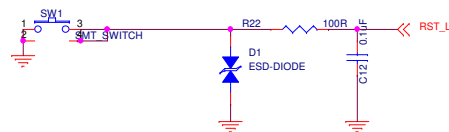


Flash Memory

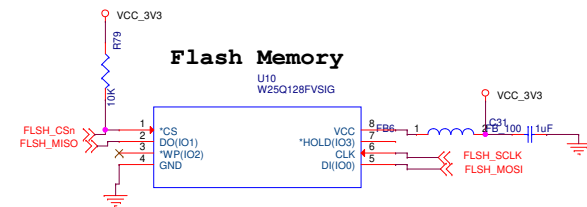


Title		
<Title>		
Size	Document Number	Rev
A3	<Doc>	1.0
Date:	Sunday, March 24, 2024	Sheet 2 of 5

RS 485 Transceiver

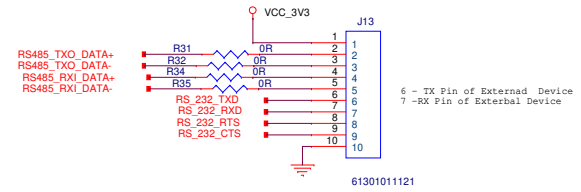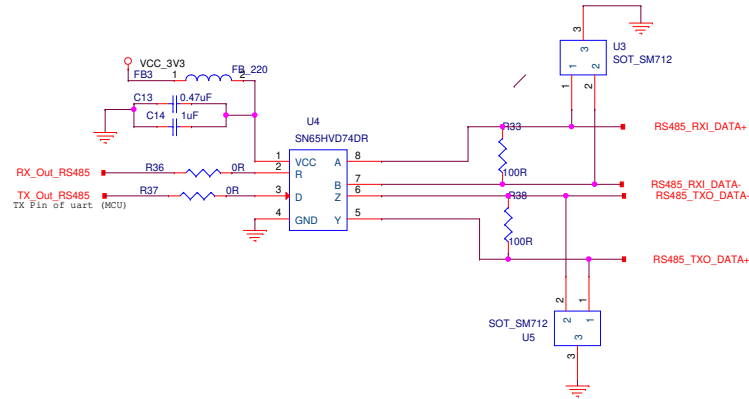


2.54 MM Pitch to be provided on the HW Board with the signal name on the slick_screen

RS 232 Transceiver


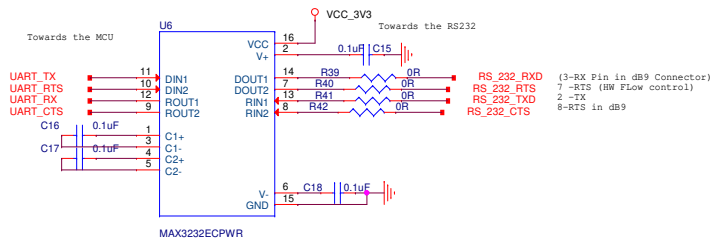


Title			
<Title>			
Size	Document Number	Rev	
A3	<Doc>	1.0	
Date:	Sunday, March 24, 2024	Sheet	3 of 5

Touch Controller


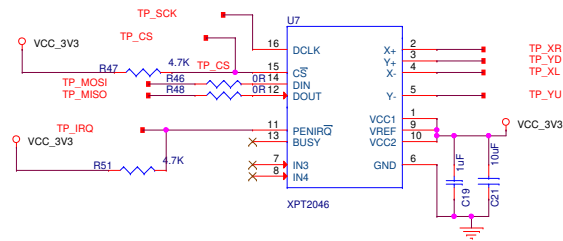


TTL/I2C Interface




8 Bit Parallel interface is selected

CL32BC1018-40A (Display Part number) J8

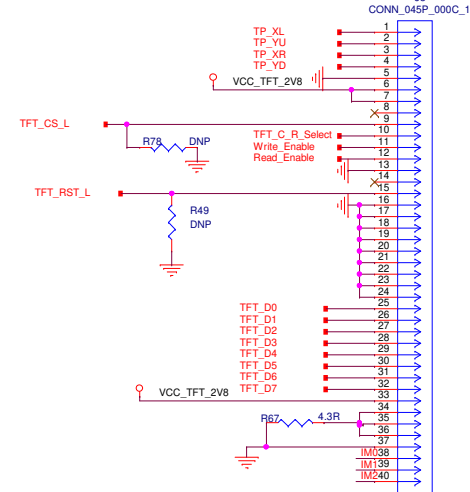


Title		
<Title>		
Size	Document Number	Rev
A3	<Doc>	1.0
Date:	Sunday, March 24, 2024	Sheet 4 of 5


5V PWR Supply from External world



5V to 3.3V

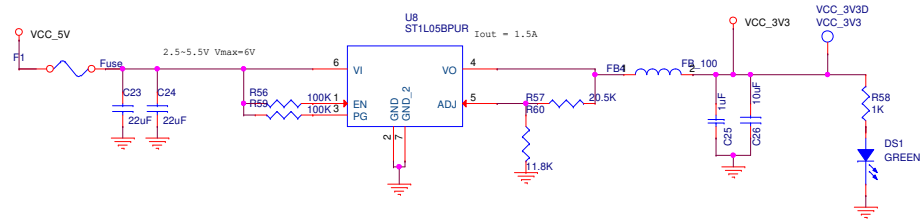

5V to 2.8V for TFT Display

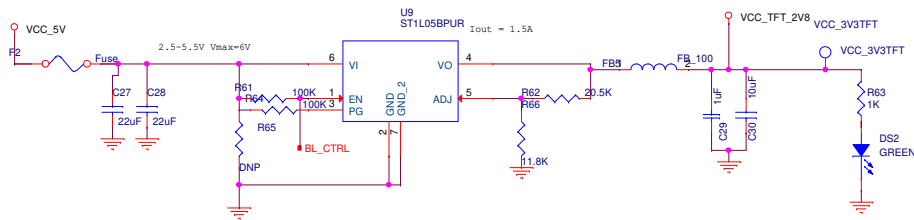

Title			<Title>	
Size	Document Number			Rev
A3	<Doc>			1.0
Date:	Sunday, March 24, 2024		Sheet	5 of 5