A

Major Project

On

RADIOSONDE PAYLOAD FOR WEATHER MONITORING SYSTEM

(Submitted in partial fulfillment of the requirements for the award of Degree)

BACHELOR OF TECHNOLOGY

In

COMPUTER SCIENCE AND ENGINEERING

By

CH. LAKSHMI SRAVYA   (187R1A0567)
S. THARUN   (187R1A05B3)
P. RITHVIK   (187R1A0581)

Under the Guidance of

J. NARASIMHARAO

(Associate Professor)

DEPARTSENT OF COMPUTER SCIENCE AND ENGINEERING

CMR TECHNICAL CAMPUS

UGC AUTONOMOUS

(Accredited by NAAC, NBA, Permanently Affiliated to JNTUH, Approved by AICTE, New Delhi) Recognized Under Section 2(f) & 12(B) of the UGCAct.1956, Kandlakoya (V), Medchal Road, Hyderabad-501401.

2018-2022

DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

CERTIFICATE

This is to certify that the project entitled "**RADIOSONDE PAYLOAD FOR WEATHER MONITORING SYSTEM**" being submitted by **CH. LAKSHMI SRAVYA (187R1A0567), S. THARUN (187R1A05B3) & P. RITHVIK (187R1A0581)** in partial fulfillment of the requirements for the award of the degree of B.Tech in Computer Science and Engineering to the Jawaharlal Nehru Technological University Hyderabad, is a record of bonafide work carried out by him/her under our guidance and supervision during the year 2021-22. It is certified that they have completed the project satisfactorily. The results embodied in this thesis have not been submitted to any other University or Institute for the award of any degree or diploma.

J. Narasimharao   **Dr. A. RAJI REDDY**
(Associate Professor)   DIRECTOR
INTERNAL GUIDE

Dr. K. Srujan Raju   **EXTERNAL EXAMINER**
      HOD

Submitted for viva voice Examination held on _____

ACKNOWLEDGEMENT

CH. LAKSHMI SRAVYA   **(187R1A0567)**

S. THARUN   **(187R1A05B3)**

P. RITHVIK   **(187R1A0581)**

ABSTRACT

This project aims to design a reliable embedded system that will be used for measuring, temperature, pressure, and humidity in the atmosphere for up-to-date weather monitoring. Weather is monitored with the help of payload equipment in which temperature, pressure, and humidity sensors. These measured values are then transmitted to the ground receiver for forecast and analysis which would display information timely. Radiosonde data is a valuable resource in the detection of climate change in the upper atmosphere. These measured values are then transmitted to the ground station for forecast and analysis. Radio frequency signals are used for communication between ground station and the floating station (space station) respectively along with GSM module to send location on mobile in order to increase the reliability of the project. Radiosonde data is a valuable resource in the detection of climate change in the upper atmosphere. Long time series of stratospheric temperature data, carefully screened and corrected to remove errors, are available for this purpose. Normal reporting practice usually ascribes a fixed time and position to all data reported in the ascent.

LIST OF FIGURES

LIST OF SCREENSHOTS

TABLE OF CONTENTS

1. INTRODUCTION

1. INTRODUCTION

1.1 PROJECT SCOPE

This project is titled "Radiosonde Payload for Weather Monitoring System". This device helps users to achieve accurate data on the weather temperature and air pressure surrounding it. The project is a research stage effort to construct a working efficient and affordable payload device that is capable of capturing accurate weather conditions. Getting up to date weather statistics for a specific industrial sector is a hassle that needs a high budget weather monitoring system in a grid.

1.2 PROJECT PURPOSE

This project has been developed to achieve a working application that has the ability to read and monitor weather conditions more effectively. The existing weather detection process requires a lot of capital investment including setting up the monitoring device and detecting the trajectory of payload etc. We have put forth our soft skills and technical inputs to device a system which gives better and accurate monitoring results.

1.3 PROJECT FEATURES

There are many features in our project that specifically enhance the performance and effectiveness of the model. The sensors that are placed in the model are effective and task focused instruments that take perfect readings of the air quality, weather conditions, wind movement's, temperatures and humidity. Our model consists of an emergency backup data storage which stores all the data in the module in case of an issue in relaying data in real time to the ground station.

2. SYSTEM ANALYSIS

2. SYSTEM ANALYSIS

SYSTEM ANALYSIS

System Analysis is the important phase in the system development process. The System is studied to the minute details and analyzed. In analysis, a detailed study of these operations performed by the system and their relationships within and outside the system is done. A key question considered here is, "what must be done to solve the problem?" The system is viewed as a whole and the inputs to the system are identified. Once analysis is completed the analyst has a firm understanding of what is to be done.

2.1 PROBLEM DEFINITION

A general statement of this project Radiosonde payload for weather monitoring system can be formulated as the ability of the model to measure the atmosphere weather conditions like temperature, air and pressure. Providing accuracy in measurements with simple yet powerful low cost devices to measure the atmospheric weather conditions.

2.2 EXISTING SYSTEM

At present, the Indian meteorological department measures the practical weather by using hydrogen balloons. In order to measure the practical weather, they have to send hydrogen filled balloons every day at 0.00 and 12.00 UTC. The radiosonde contains sensors capable of making direct real time measurements of air temperature, humidity and pressure with height. A meteorological balloon, carrying instruments and transmitting equipment is released, untethered, rises until it bursts, and falls back using a parachute. The RGR is lifted with weather balloons similar to traditional radiosondes to a tether string and the style is landed and localized.

2.2.1   LIMITATIONS OF EXISTING SYSTEM

Following are the limitations of the existing system:

- The devices used in the making are not cost effective and simple.
- There is no assurance of the device landing in the same place of its launching.
- More manual work would be required as part of the existing system.

2.3 PROPOSED SYSTEM

We propose a device in which it is used to monitor and record atmospheric weather conditions like temperature, air quality and pressure. This can be implemented with sensors communicating with one another connected to an arduino chip which is coded to collect information from all the sensors depicting various atmospheric parameters. The collected information is transmitted to a receiving device which is responsible to display the information from time to time. The payload with the balloon can be placed ranging from 50 mts to 1 km from the receiver for the model to work effectively. The collected information in the receiver can be viewed in our smartphones via bluetooth and can also be stored on the cloud for future uses and to continuously monitor the weather conditions at any place, time and locations.

2.3.1   ADVANTAGES OF THE PROPOSED SYSTEM

The following are the advantages of the proposed system:

- Simple and reliable data measurement in real time.
- The problem of the device landing at a place different from its launching area is overcomed in the proposed system
- Less manual work to implement the model in real time.
- Effective and timely data storage of the information in the cloud.

- Cost effective and simpler devices for weather monitoring
- Easy access to the information on smartphones through bluetooth.

2.4 FEASIBILITY STUDY

The feasibility of the project is analyzed in this phase and the business proposal is put forth with a very general plan for the project and some cost estimates. During system analysis, the feasibility study of the proposed system is to be carried out. This is to ensure that the proposed system is not a burden to the company. Three key considerations involved in the feasibility analysis:

- Economic Feasibility
- Technical Feasibility
- Social Feasibility

2.4.1 ECONOMIC FEASIBILITY

The developing system must be justified by cost and benefit. Criteria to ensure that effort is concentrated on a project, which will give best, return at the earliest. One of the factors, which affect the development of a new system, is the cost it would require. The following are some of the important financial questions asked during the preliminary investigation:

- The costs conduct a full system investigation.
- The cost of the hardware and software.
- The benefits are in the form of reduced costs or fewer costly errors.

Since the system is developed as part of project work, there is no manual cost to spend for the proposed system. Also, all the resources are already available, which gives an indication that the system is economically possible for development.

2.4.2 TECHNICAL FEASIBILITY

This study is carried out to check the technical feasibility, that is, the technical requirements of the system. Any system developed must not have a high demand on the available technical resources. The developed system must have a modest requirement, as only minimal or null changes are required for implementing this system.

2.4.3 BEHAVIORAL FEASIBILITY

This includes the following questions:

- Is there sufficient support for the users?
- Will the proposed system cause harm?

The project would be beneficial because it satisfies the objectives when developed and installed. All behavioral aspects are considered carefully and conclude that the project is behaviorally feasible.

2.5 HARDWARE & SOFTWARE REQUIREMENTS

2.5.1 HARDWARE REQUIREMENTS:

Hardware interfaces specify the logical characteristics of each interface between the software product and the hardware components of the system.

The following are some hardware requirements:

MATERIAL	QUANTITY
BMP280	1
DHT11, HC-05	1
NRF24	1
IR SENSOR	2
ARDUINO NANO	1
SD CARD	3
Bluetooth	-
RTC CLOCK MODULE	1

Table 2.5.1:Hardware Requirements

Required components

Arduino nano: Arduino nano is also the microcontroller through which all the connections are made and sensors are connected. Arduino IDE is used to communicate with the sensor's actions and has 14 pins in total and operates at 5volts. In the developed model, three microcontrollers are used for transmitter and receiver connections.
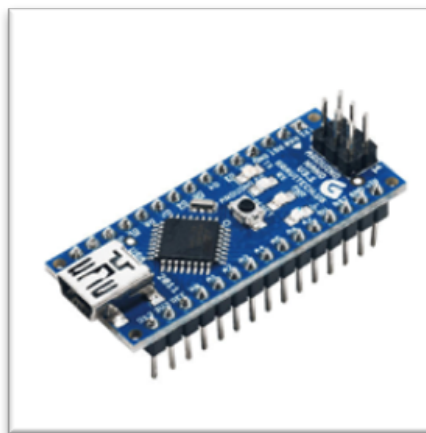
BMP280: The real-time temperature and air pressure can be known with a BMP280 sensor. It uses a very low amount of power to operate effectively.

CMRTC
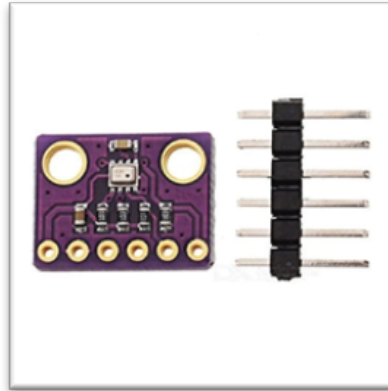
DHT11: DHT11 is a temperature and humidity sensor. The sensor has a humidity measurement component and a temperature measurement component. High reliability, fast response, and cost-effectiveness can be seen with this sensor.
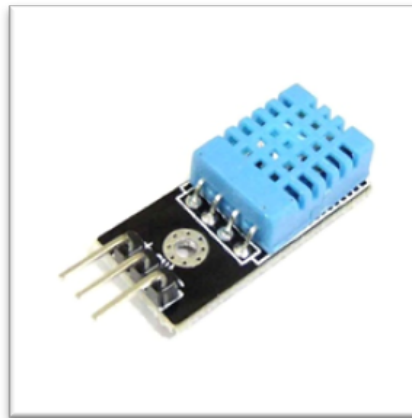
NRF24: NRF24 signal is used for wireless communication between all the microcontrollers. Transmission of received data is provided by the RF transmitter, while the data is received by the RF receiver.
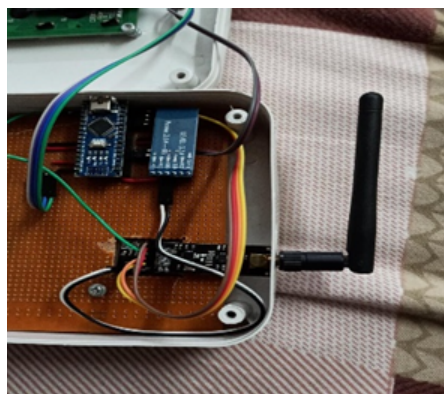
LDR MODULE: To indicate the presence of daylight in particular surroundings LDR module is used. Depending upon the presence or absence of light the daylight is measured and displayed.

SD CARD: The memory card is used to store the information from the sensors that are present in the transmitter module. The SD card when connected to a personal computer the information can be viewed.
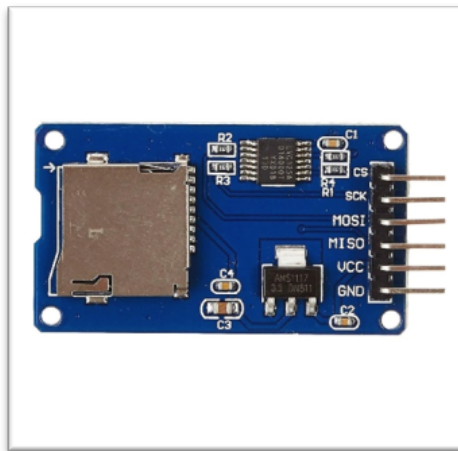
HC-05: HC-05 is the Bluetooth module that is used to transmit the information from the model to our smartphones via Bluetooth. This sensor is present on the receiver module of the model.
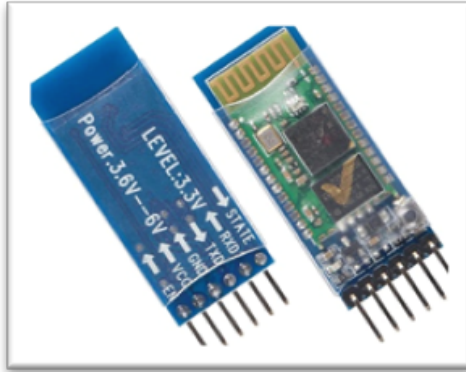
RTC clock module: RTC is a real-time clock that is used to keep a track of the exact date & time of the day. RTC clock module is integrated with all the sensor values which will record at what time and date the values are measured.
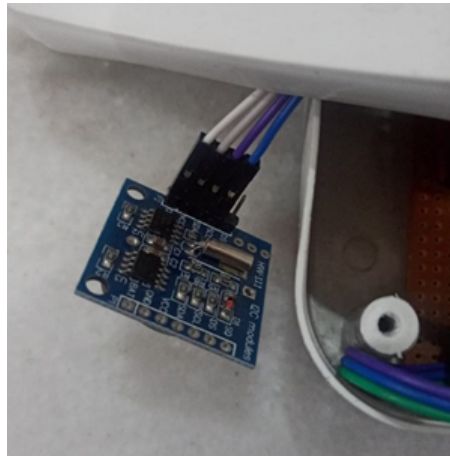
2.5.2 SOFTWARE REQUIREMENTS:

Software Requirements specifies the logical characteristics of each interface and software components of the system. The following are some software requirements:

- IDE: Arduino IDE
- Languages: Embedded C, CPP

3. ARCHITECTURE

3. ARCHITECTURE

3.1 PROJECT ARCHITECTURE
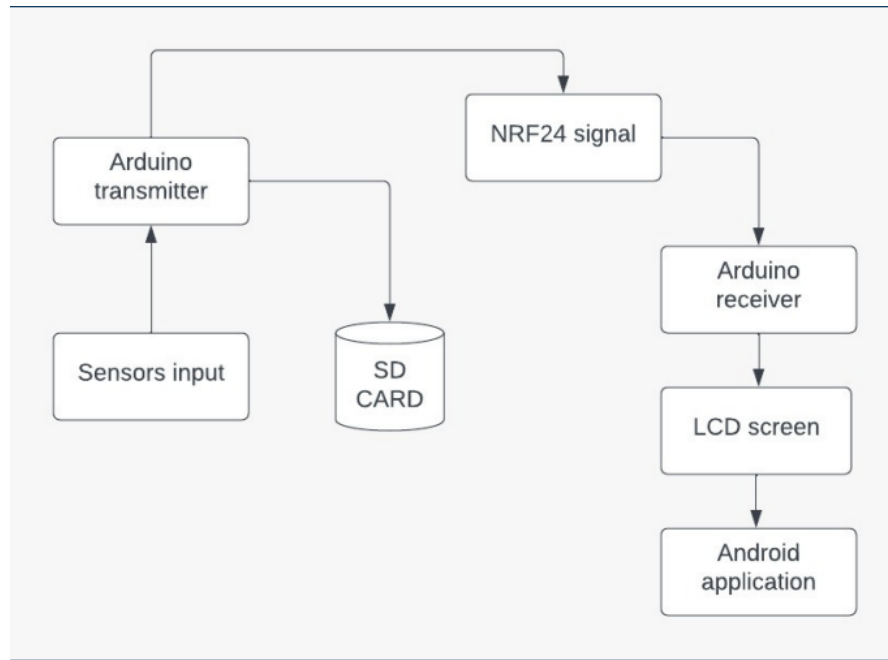
Figure 3.1: Project Architecture of Radiosonde Payload for Weather
Monitoring System

3.2 DESCRIPTION

The project is based on measuring the atmospheric weather conditions like temperature, pressure, humidity and air quality in a particular location or a place. The complete device implementing this project is made with the interaction between the payload and the receiver. The payload also known as the transmitter is attached to a balloon which collects the information from various sensors connected to an arduino. The payload with the balloon can be placed ranging from 50 mts to 1 km from the receiver for the model to work effectively.

3.3 USE CASE DIAGRAM

In the use case diagram, we have three actors who are the transmitter, the receiver and the application. A use case diagram shows various use cases and different types of users the system has. The use cases are represented by either circles or ellipses. The actors are often shown as stick figures.
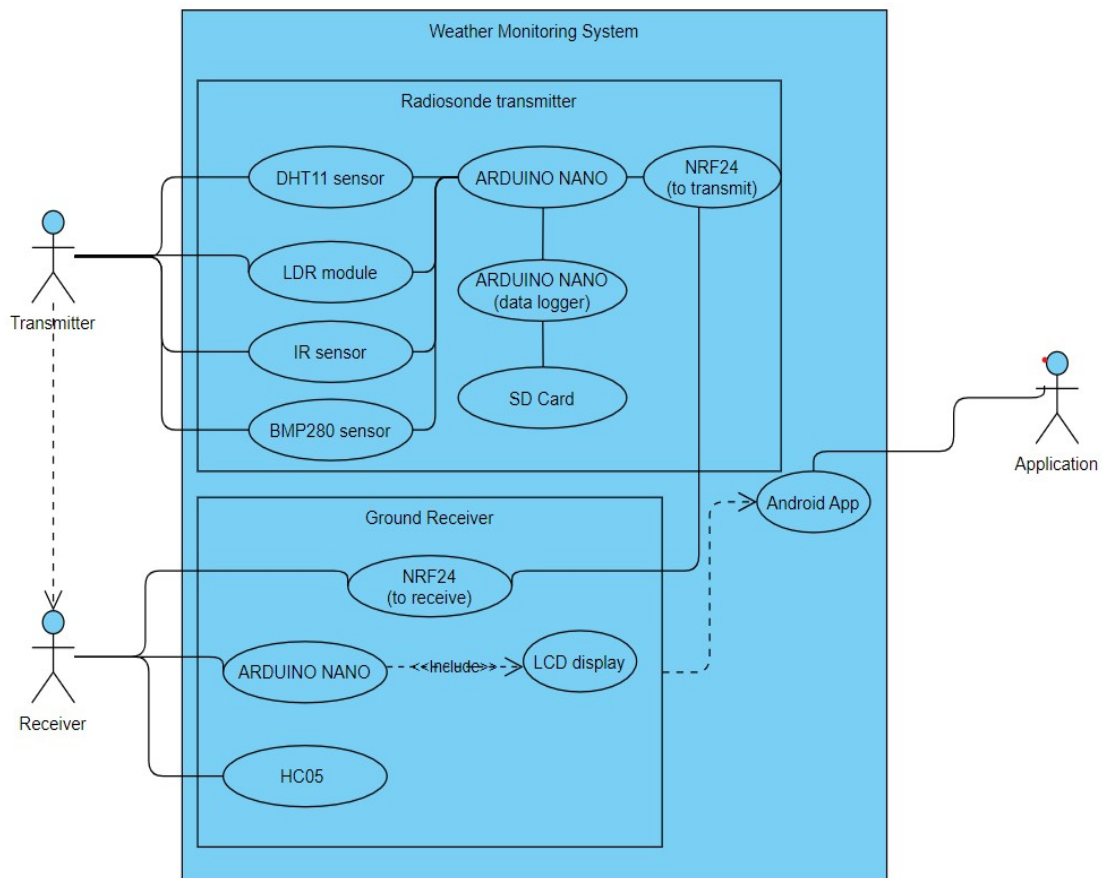
Figure 3.2: Use Case Diagram for Radiosonde Payload for Weather Monitoring System

3.4 CLASS DIAGRAM

Class Diagram is a collection of classes and objects.

Transmitter
-Adafruit_BMP280: bmp
-byte: address
-byte:gasValueu
-byte:dn
-byte:humidity
-byte:temp
-byte: pressure
+beep()
+setup()
+loop()

Receiver
-LiquidCrystal_I2C lcd(0x27,16,2)
-byte: address
-byte:gasValueu
-byte:dn
-byte:humidity
-byte:temp
-byte: pressure
-byte: tbmp,abmp
-boolean: go
-boolean: pro
+setup()
+loop()
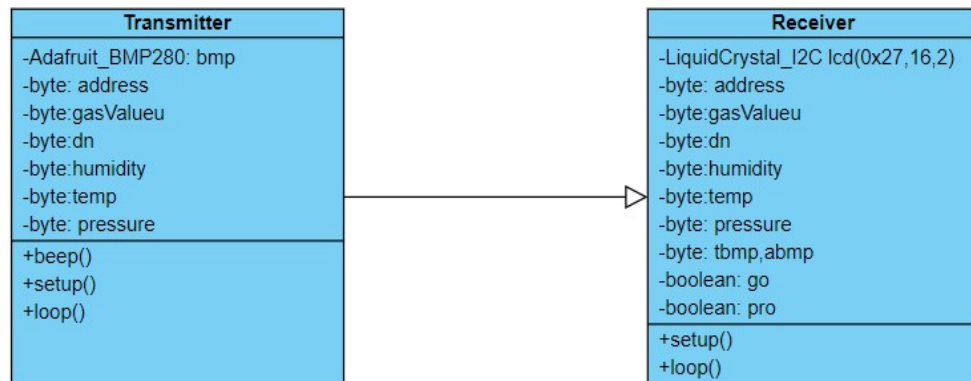
Figure 3.3: Class Diagram for Radiosonde Payload for Weather
Monitoring System

3.5 SEQUENCE DIAGRAM

The below Figure 3.4 depicts the Sequence diagram of Radiosonde Payload for Weather Monitoring System.

Figure 3.4: Sequence Diagram for Radiosonde Payload for Weather Monitoring System

3.6 ACTIVITY DIAGRAM

The activity diagram describes the flow of activity states.
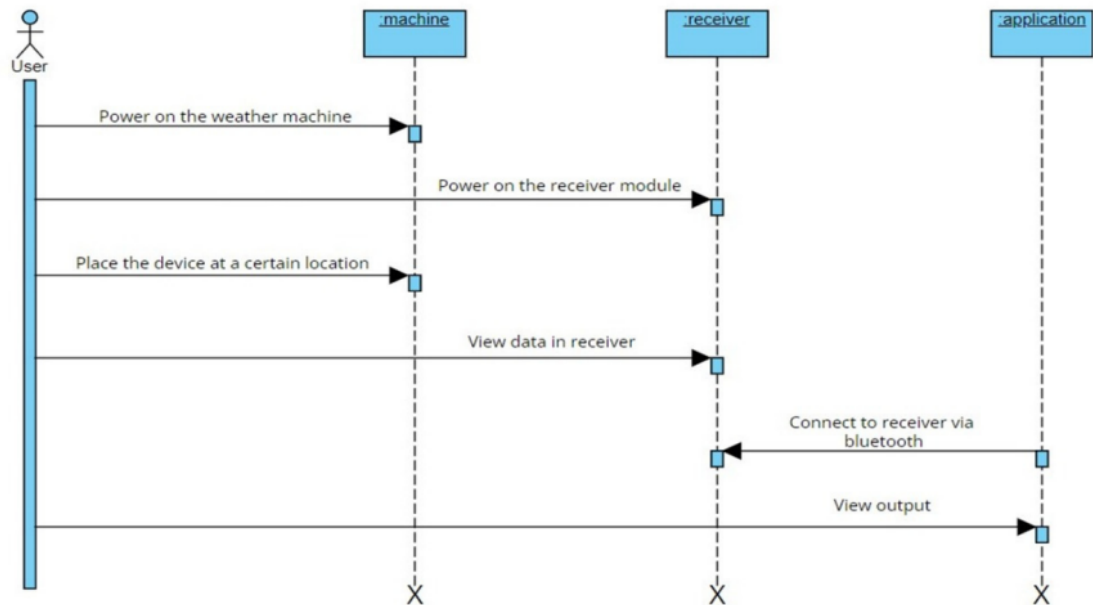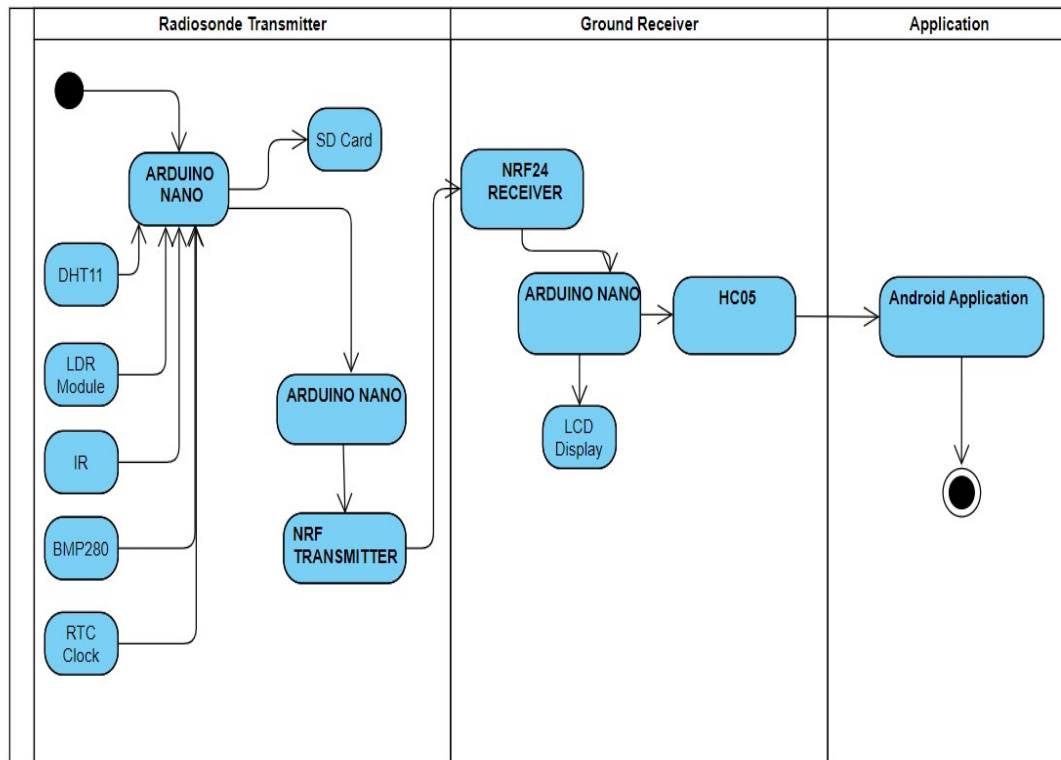

Figure 3.5: Activity Diagram for Radiosonde Payload for Weather
Monitoring System

3.7 DATA FLOW DIAGRAM
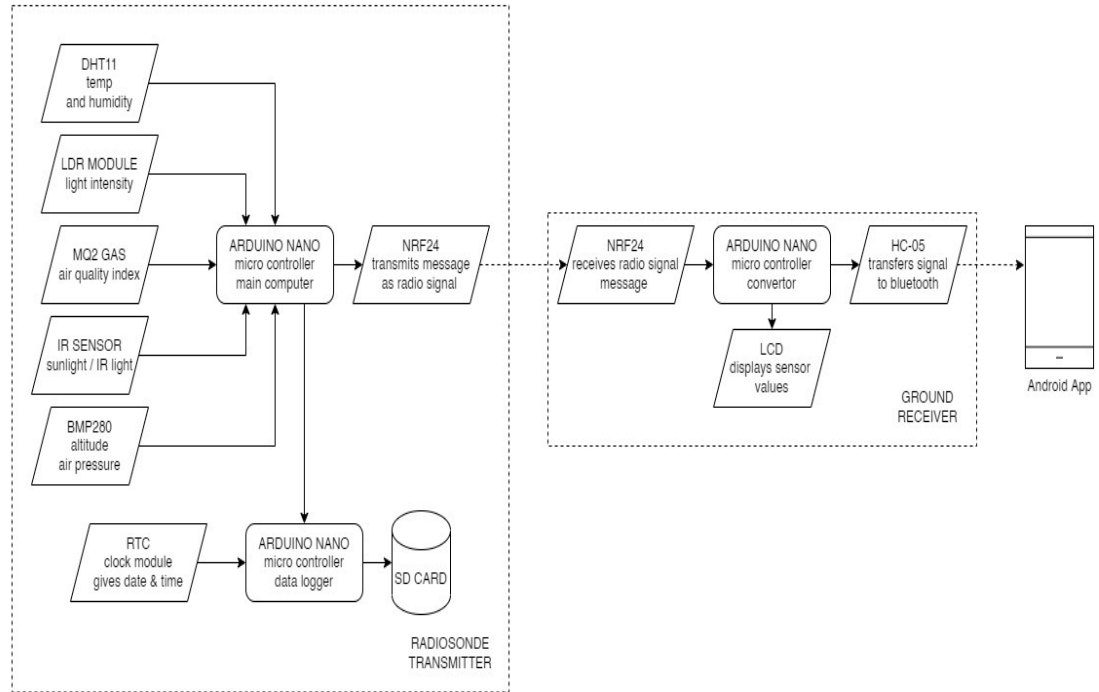
Figure 3.6: Data Flow Diagram forRadiosonde Payload for Weather
Monitoring System

4. IMPLEMENTATION

4.1 SAMPLE CODE
Transmitter:

```
#include "DHT.h"
#include <Adafruit_BMP280.h>
#include <SPI.h>
#include <nRF24L01.h>
#include <RF24.h>
#define DHTTYPE DHT11
#define DHTPIN 7
#define gasPin A3
#define batPin A2
#define lightPin A1
#define buzzer 6
DHT dht(DHTPIN, DHTTYPE);
Adafruit_BMP280 bmp;
RF24 radio(9, 10);
const byte address[6] = "00001";
void beep(){
  tone(buzzer,1000);
  delay(250);
  noTone(buzzer);
  delay(250);
}
struct MyData {
  byte gasValue;
  byte dn;
  byte tbmp;
  byte pbmp;
  byte abmp;
  byte h;
  byte t;
  byte b;
};
MyData data;
void setup() {
  dht.begin();
  bmp.begin();
  bmp.setSampling(Adafruit_BMP280::MODE_NORMAL,     /* Operating Mode. */
          Adafruit_BMP280::SAMPLING_X2,     /* Temp. oversampling */
          Adafruit_BMP280::SAMPLING_X16,    /* Pressure oversampling */
          Adafruit_BMP280::FILTER_X16,      /* Filtering. */
          Adafruit_BMP280::STANDBY_MS_500); /* Standby time. */
  radio.begin();
  radio.openWritingPipe(address);
  radio.setPALevel(RF24_PA_MIN);
  radio.stopListening();
```

```
 pinMode(6,OUTPUT);
 Serial.begin(9600);
 beep();
 beep();
 beep();
 beep();
 beep();
}
void loop() {
 data.gasValue = analogRead(gasPin);
 data.h = dht.readHumidity();
 data.t = dht.readTemperature();
 data.tbmp = bmp.readTemperature();
 data.pbmp = bmp.readPressure();
 data.abmp = bmp.readAltitude(1019.66);
 data.dn = map(analogRead(lightPin),0,1000,0,100); //LDR
 data.b = map(analogRead(batPin),125,155,0,100); // BATTERY
 radio.write(&data,sizeof(MyData)); // sent to reciever
 String text
=String(data.h)+"|"+String((data.t+data.tbmp)/2)+"|"+String(data.gasValue)+"|"+String
(data.pbmp)+"|"+String(data.abmp)+"|"+String(data.dn)+"|"+String(data.b);
 Serial.println(text);
 beep();
 delay(2500);
}
```

Receiver:

```
#include <SPI.h>
#include <nRF24L01.h>
#include <RF24.h>
#include <Wire.h>
#include <LiquidCrystal_I2C.h>
LiquidCrystal_I2C lcd(0x27, 16, 2);
RF24 radio(9, 10); // CE, CSN
bool pro=false;
bool go=false;
int n=0;
const byte address[6] = "00001";
struct MyData {
  byte gasValue;
  byte dn;
  byte tbmp;
  byte pbmp;
  byte abmp;
  byte h;
  byte t;
  byte b;
```

```
};
MyData data;
void setup() {
  Serial.begin(9600);                    //Serial baud rate set to 9600
  radio.begin();                    // nrf24
  radio.openReadingPipe(0, address);
  radio.setPALevel(RF24_PA_MIN);
  radio.startListening();
  lcd.begin();
  lcd.backlight();
  lcd.clear();
  lcd.setCursor(0,0);
  lcd.print("WELCOME");
  lcd.setCursor(0,1);
  lcd.print("WAITING...");
  Serial.println("WAITING");
  pinMode(3,INPUT_PULLUP);
}

void loop() {
  if ( radio.available() ) {
  pro=true;
  radio.read(&data, sizeof(MyData));
  Serial.println(data.h);
  Serial.println(data.t);
  Serial.println(data.dn);
  Serial.println(data.gasValue);
  Serial.println(data.tbmp);
  Serial.println(data.pbmp);
  Serial.println(data.abmp);
  Serial.println(data.b);
  }
  if(pro)
  {
   if(digitalRead(3)==LOW)
   {n=n+1;delay(500);go=true;}
   if(n==8)
   n=1;
   if(go)
   {
   Serial.println(n);
   switch(n){
     case 1:
     {lcd.clear();
     lcd.setCursor(0,0);
     lcd.print("HUMIDITY : ");
     lcd.setCursor(0,1);
```

```
 lcd.print(data.h);
    lcd.print("%");}
    break;
    case 2:
    {lcd.clear();
    lcd.setCursor(0,0);
    lcd.print("TEMPERATURE : ");
    lcd.setCursor(0,1);
    lcd.print((data.t+data.tbmp)/2);
    lcd.print(" C");}
    break;
    case 3:
    {lcd.clear();
    lcd.setCursor(0,0);
    lcd.print("PRESSURE : ");
    lcd.setCursor(0,1);
    lcd.print(data.pbmp);
    lcd.print("kPa");}
    break;
    case 4:
    {lcd.clear();
    lcd.setCursor(0,0);
    lcd.print("ALTITUDE : ");
    lcd.setCursor(0,1);
    lcd.print(data.h);
    lcd.print("M ABV SEA LVL");}
    break;
    case 5:
    {lcd.clear();
    lcd.setCursor(0,0);
    lcd.print("BATTERY : ");
    lcd.setCursor(0,1);
    lcd.print(data.b);
    lcd.print("%");}
    break;
    case 6:
    {lcd.clear();
    lcd.setCursor(0,0);
    if(data.dn==1)
    lcd.print("DAY");
    if(data.dn==0)
    lcd.print("NIGHT");}
    break;
    case 7:
    {lcd.clear();
    lcd.setCursor(0,0);
    if(data.gasValue<50)
```

```
lcd.print("AIR : GOOD");
    if(data.gasValue>50)
    lcd.print("AIR : BAD")  ;}
    break;
  }
  go=false;
 }
 }
}
```

## SD card:

```
#include <Wire.h> //i2c comm
#include <TimeLib.h> //clock
#include <SPI.h> // memory card
#include <SD.h> // sd card
#include <DS1307RTC.h> //clock
String data;
String info;
const int chipSelect = 10;
void setup() {
  Serial.begin(9600);
  SD.begin(chipSelect);
}
void loop() {
delay(3000);
File dataFile = SD.open("datalog.txt", FILE_WRITE);
if(Serial.available())
info=Serial.readString(); // read data from primary arduino
else
info="no data";
  tmElements_t tm;
  if (RTC.read(tm)) {
    int hr=tm.Hour;
    int mi=tm.Minute;
    int se=tm.Second;
    int da=tm.Day;
    int mo=tm.Month;
    int ye=tmYearToCalendar(tm.Year);
data=String(hr)+":"+String(mi)+":"+String(se)+"\t"+String(da)+":"+String(mo)+":"+String(ye)+"\t"+info;
  }
  else{
    data="Sensor not found";
  }
  dataFile.close();

}
```

5. SCREENSHOTS

5.1 PAYLOAD EQUIPMENT
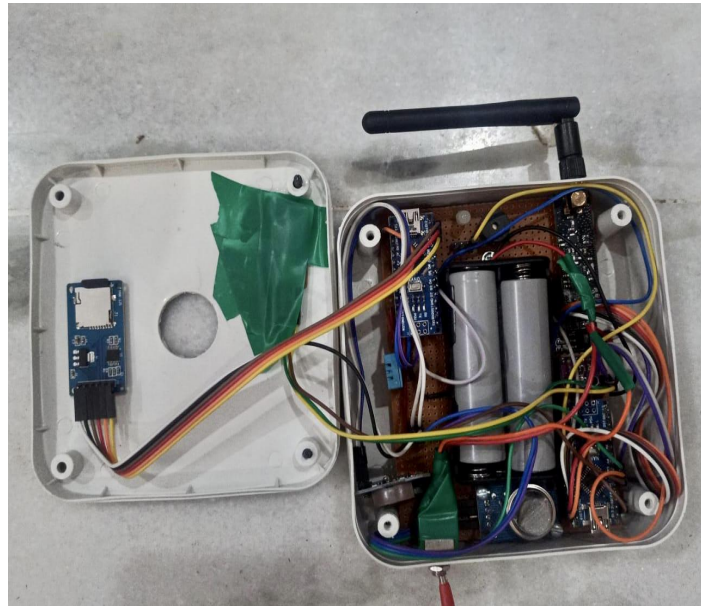
Screenshot 5.1.1: Transmitter
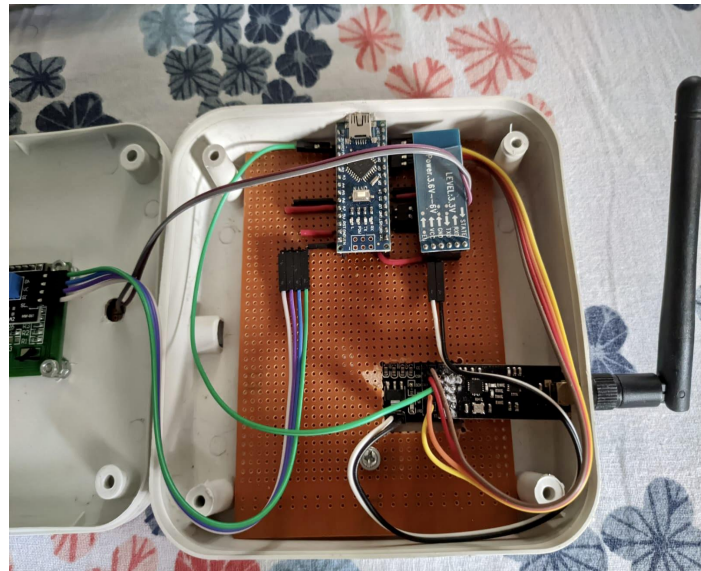
Screenshot 5.1.2: Receiver

5.2 Values Obtained
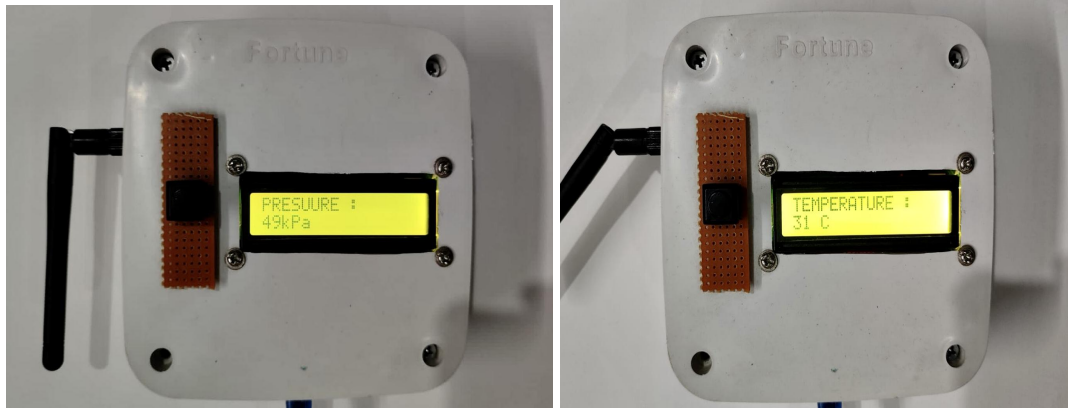
**Screenshot 5.2.1: Display Values for Pressure
and Temperature on LCD**
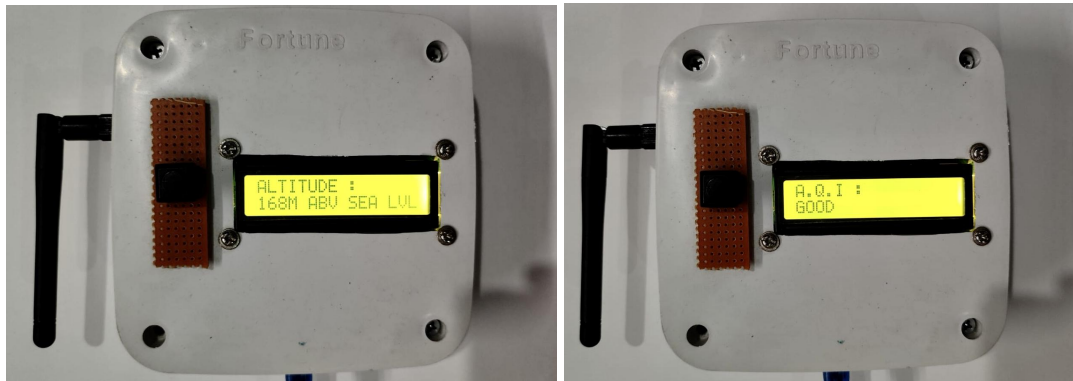
**Screenshot 5.2.2: Display Values for Altitude
and Air-Quality on LCD**
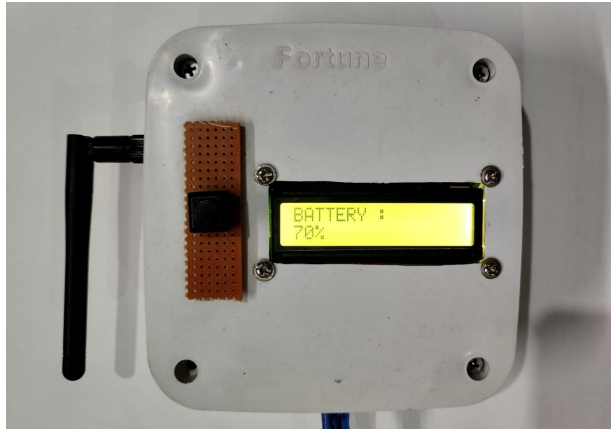
**Screenshot 5.2.3: Display Value of Battery
level on LCD**
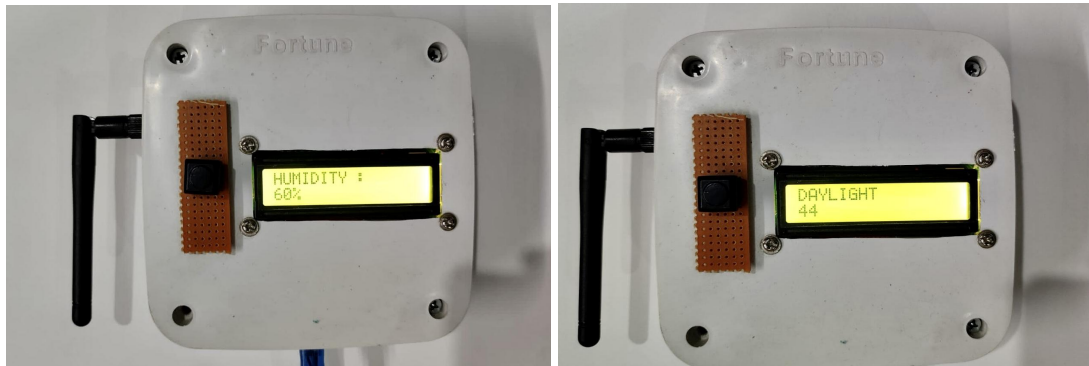
**Screenshot 5.2.4: Display Values for Humidity
and Daylight on LCD**

5.3 Application view

**Screenshot 5.3: Application View of Sensors Value
and Serial Monitor**

5.4 SD Card Results

Screenshot 5.4: Results Stored on SD Card

6. TESTING

6. TESTING

6.1 INTRODUCTION TO TESTING

The purpose of testing is to discover errors. Testing is the process of trying to discover every conceivable fault or weakness in a work product. It is the process of exercising software with the int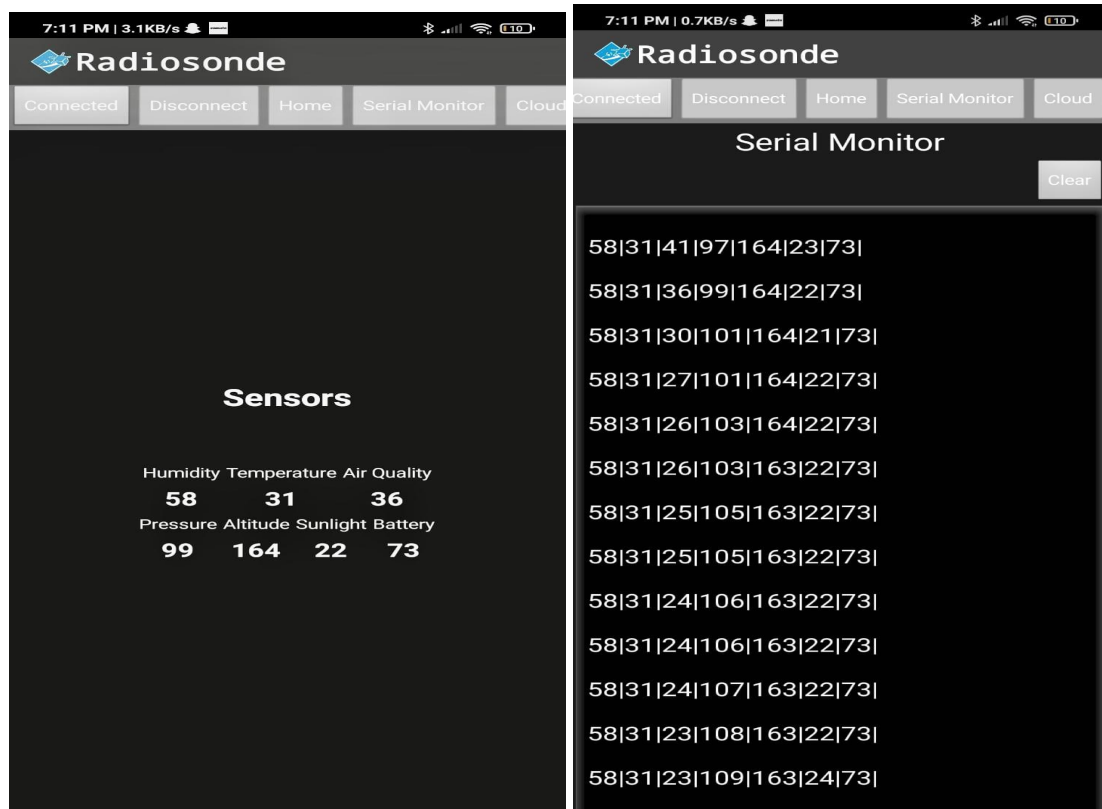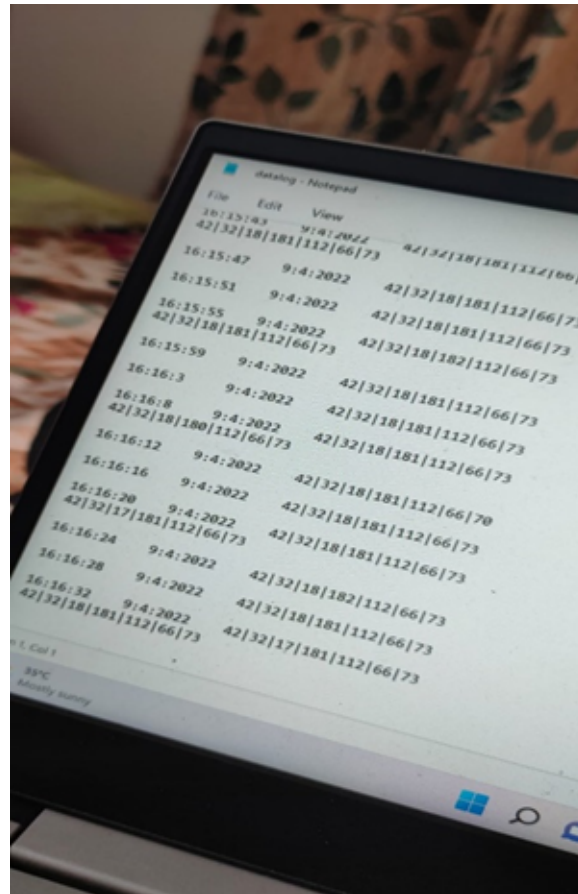ent of ensuring that the Software system meets its requirements and user expectations and does not fail in an unacceptable manner.

6.2 TYPES OF TESTING

6.2.1 UNIT TESTING

Unit testing involves the design of test cases that validate that the internal program logic is functioning properly, and that program inputs produce valid outputs. All decision branches and internal code flow should be validated. It is the testing of individual software units of the application. This is a structural testing that relies on knowledge of its construction and is invasive.

6.2.2 INTEGRATION TESTING

Integration tests are designed to test integrated software components to determine if they actually run as one program. Integration tests demonstrate that although the components were individually satisfactory, as shown by successfully unit testing, the combination of components is correct and consistent. Integration testing is specifically aimed at exposing the problems that arise from the combination of components.

6.2.3 FUNCTIONAL TESTING

Functional tests provide systematic demonstrations that functions tested are available as specified by the business and technical requirements, system documentation, . Functional testing is centered on the following items:

Valid Input : identified classes of valid input must be accepted

Invalid Input: identified classes of invalid input must be rejected.

Functions: identified functions must be exercised.

Output: identified classes of application outputs must be exercised.

Systems/Procedures: interfacing systems or procedures must be invoked.

6.3 TEST CASES

6.3.1 WORKING OF PAYLOAD

SNO	Weather parameters	Values are taken indoors	Values are taken outdoors	Recorded values from high altitude	Recorded values from low altitude (Ground level)
1	Temperature	30 (C)	31 (C)	34 (C)	32 (C)
2	Humidity	69%	68 %	64 %	56 %
3	pressure	102 (kPa)	96 (kPa)	39 kPa	124 kPa
4	Altitude	141 m	142 m	147 m	139 m
5	Daylight	30 %	95 %	97%	91 %
6	Air quality	16ppm)	17 ppm	Good	good

Table 6.1: Values taken from different testcases

7. CONCLUSION

7. CONCLUSION & FUTURE SCOPE

7.1 PROJECT CONCLUSION

The model is an ongoing prototype embedded system that is developed with the notion to have a cost-effective, reliable, and simple model which is having the ability to produce accurate atmospheric weather parameters. Further enhancements in the model can be possible with much stronger batteries and sensors and can be upgraded with wi-fi-enabled cloud communication. With much farther communication enhancement between the payload and ground station implementation on a wider radius of the area is possible which is a potential future enhancement.

7.2 Future Scope

The potential idea behind the development of the project was to develop a system that can measure atmospheric weather conditions effectively. The future enhancement would be to convert the prototype model into a real-time embedded system that can be implemented within a large radius. The usage of greater quality sensors with high-capacity batteries to run on a large scale. Another enhancement would be multiple transmitters present at different locations with a single receiver to collect all the information from these various locations and for the comparison of various atmospheric parameters for long-term trend analysis.

8. BIBLIOGRAPHY

8. BIBLIOGRAPHY

8.1 REFERENCES

[1] Mr. Mohit Tiwari, Deepak Narang, Priya Goel, Anupama Gadhwal, Abhinav Gupta, and Ankush Chawla, "WEATHER MONITORING SYSTEM USING IOT AND CLOUD COMPUTING", International Journal of Advanced Science and Technology.

[2] Shubham Wankhede, Anushri Kher, Komal Rawate, Mrs. M.A. Kango, "RADIOSONDE PAYLOAD FOR WEATHER BALLOONS", International Research Journal of Engineering and Technology (IRJET), Volume: 05 Issue: 03 | Mar-2018.

[3] Ferdin Joe John Joseph, "IoT Based Weather Monitoring System for Effective Analytics", International Journal of Engineering and Advanced Technology (IJEAT) ISSN: 2249 – 8958, Volume-8 Issue-4, April 2019.

[4] Snehal R. Shinde, A. H. Karode, Dr. S. R. Suralkar, "REVIEW ON - IOT BASED ENVIRONMENT MONITORING SYSTEM", International Journal of Electronics and Communication Engineering and Technology (IJECET)Volume 8, Issue 2, March - April 2017.

[5] S. Zafar, G. Miraj, R. Baloch, D. Murtaza, and K. Arshad, "An IoT Based Real-Time Environmental Monitoring System Using Arduino and Cloud Service", Eng. Technol. Appl. Sci. Res., vol. 8, no. 4, pp. 3238-3242, Aug. 2018.

[6] "Arduino." [Online]. Available: http://www.arduino.cc/download

[7] R Suresh Babu, T Palaniappan, K. Anushya, M Kowsalya, M Krishnadevi, "IoT Based Weather Monitoring System", International Journal of Advanced Research Trends in Engineering and Technology (IJARTET) Vol. 5, Special Issue 13, March 2018.

8.2 GITHUB LINK

https://github.com/sravya666/MAJOR-PROJECT