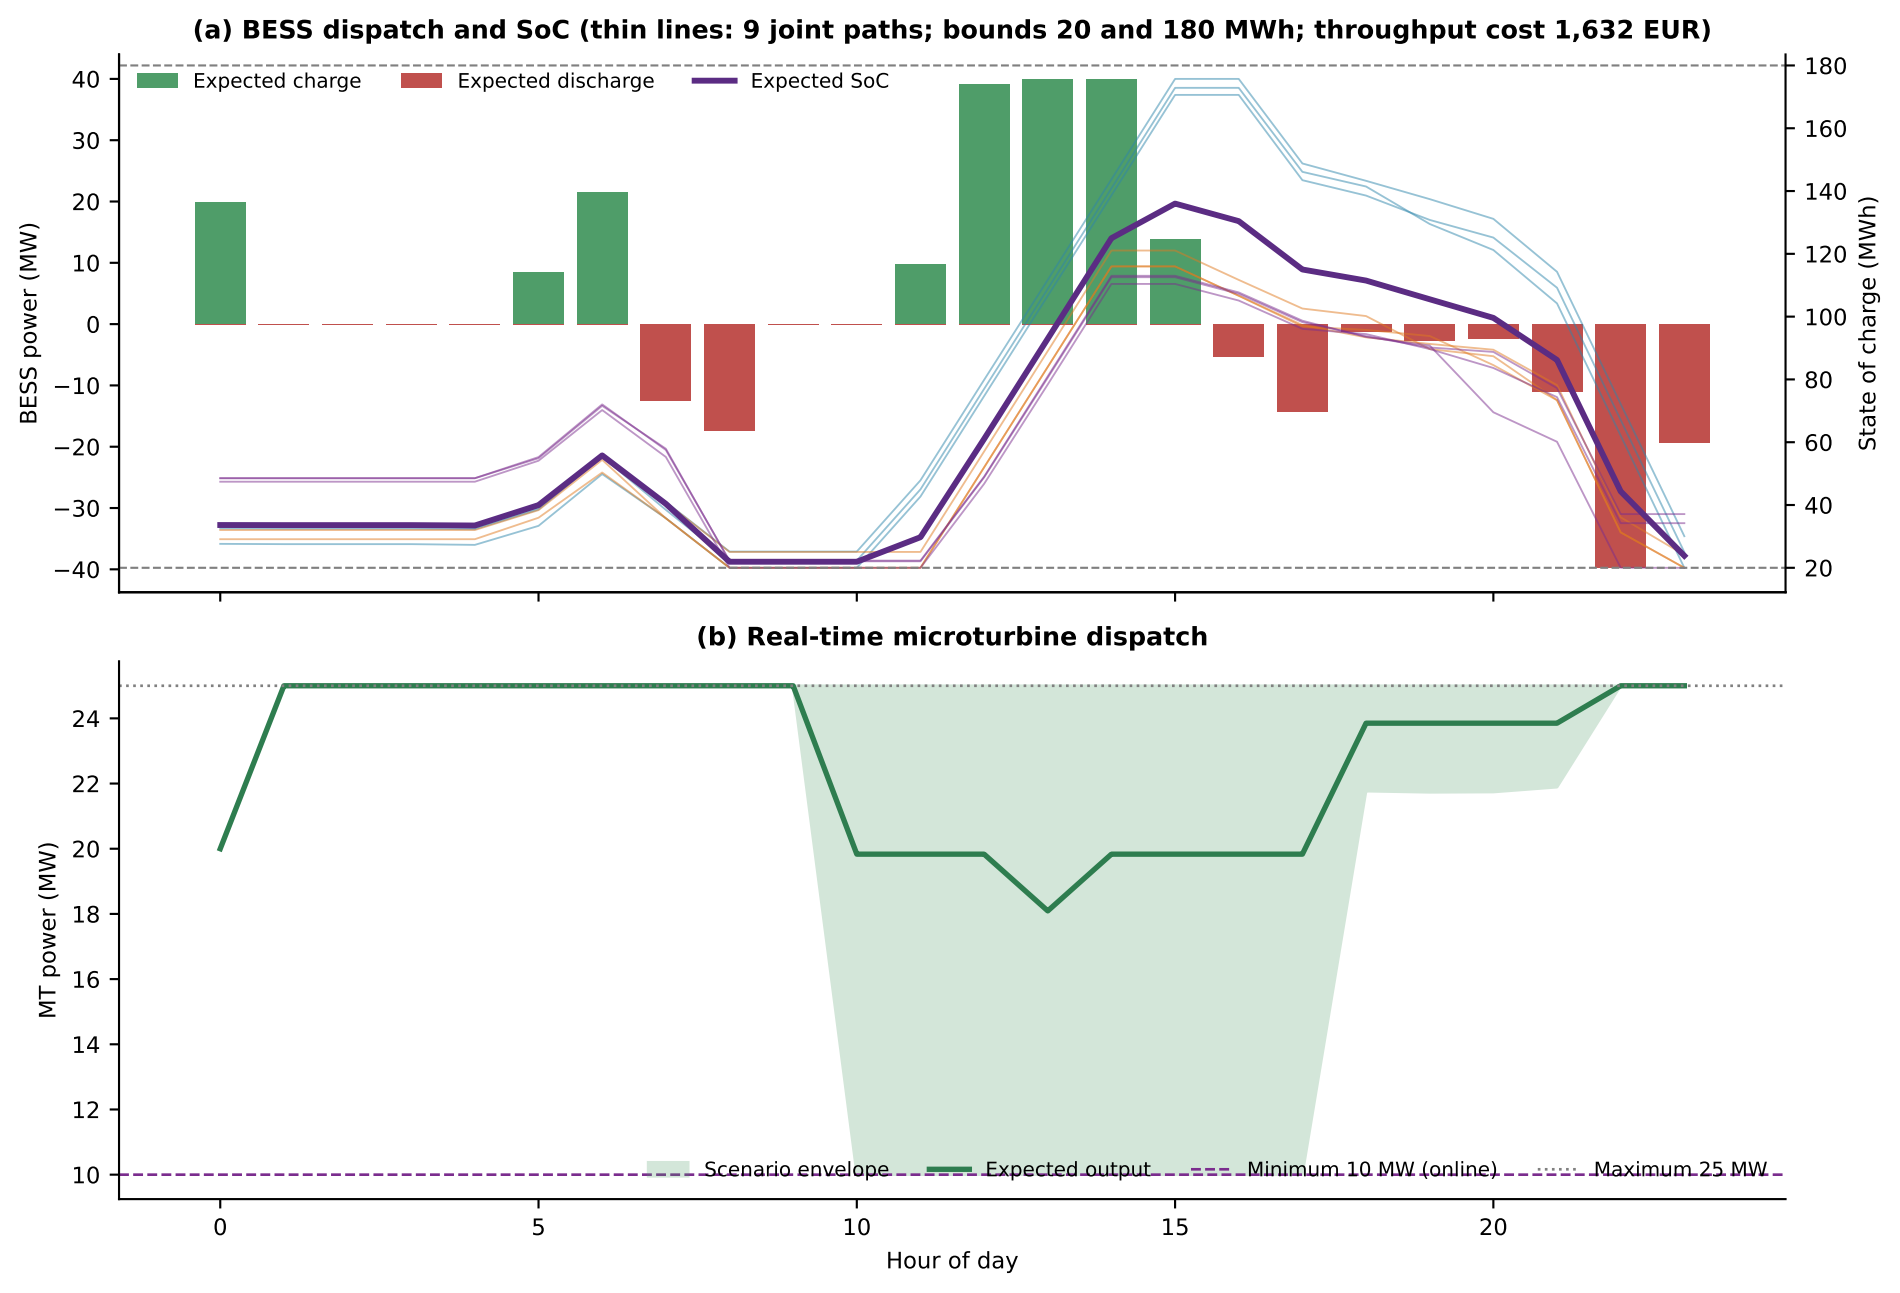
(a) BESS dispatch and SoC (thin lines: 9 joint paths; bounds 20 and 180 MWh; throughput cost 1,632 EUR)
Expected charge
Expected discharge
Expected SoC
BESS power (MW)
State of charge (MWh)
40
30
20
10
0
−10
−20
−30
−40
180
160
140
120
100
80
60
40
20
(b) Real-time microturbine dispatch
MT power (MW)
24
22
20
18
16
14
12
10
Scenario envelope
Expected output
Minimum 10 MW (online)
Maximum 25 MW
0
5
10
15
20
Hour of day