

Digital Water Level Recorder



DESCRIPTION

MIRA Piezo Level Sensors are designed for accurate and reliable borewell water level monitoring, helping industries and facilities meet CGWA compliance requirements with confidence. Built with a rugged, field-proven design, these sensors are well suited for harsh borewell environments and long-term submersion.

The telemetry feature barometric compensation, which corrects for atmospheric pressure variations to ensure precise and consistent water level measurements. This enables dependable data for groundwater monitoring and regulatory reporting.

To ensure long-term accuracy, MIRA sensors use high-quality PUR/PE cables that resist stretching and aging. Unlike conventional cables that may elongate over time and affect readings, these cables maintain their structural stability, ensuring durable performance, measurement accuracy, and reliable long-term monitoring for CGWA compliance.




SPECIFICATION


Input Voltage	120V - 270V AC 50Hz/ Battery / Solar
Measurement Range	0 - 200mH2O
Accuracy	±0.5% F.S. (±0.25% optional)
Long-Term Stability	≤±0.2% F.S./year
Materials of Construction	SS316L (sensor)/Titanium(on order), PUR/PE cable, O-Ring Sealed
Ingress Protection	IP68 (For Permanent Submersion)
Sensor Output	RS485/4-20mA
Vibration & Shock Resistance	20g, 20Hz–5000Hz, 20g, 11ms
Communication	4G LTE based, with Single M2M SIM
Temp/Humidity	–20 °C to +70 °C, 5–95% RH non-condensing.
Memory	8MB Flash(default), 8 GB SD Card(optional)
Antenna & Enclosure type	1.6dBi rubber duct antenna, Polycarbonate Enclosure

Barometric Compensation

MIRA Level recorders have top of the class barometric compensation for accuracy and compliance

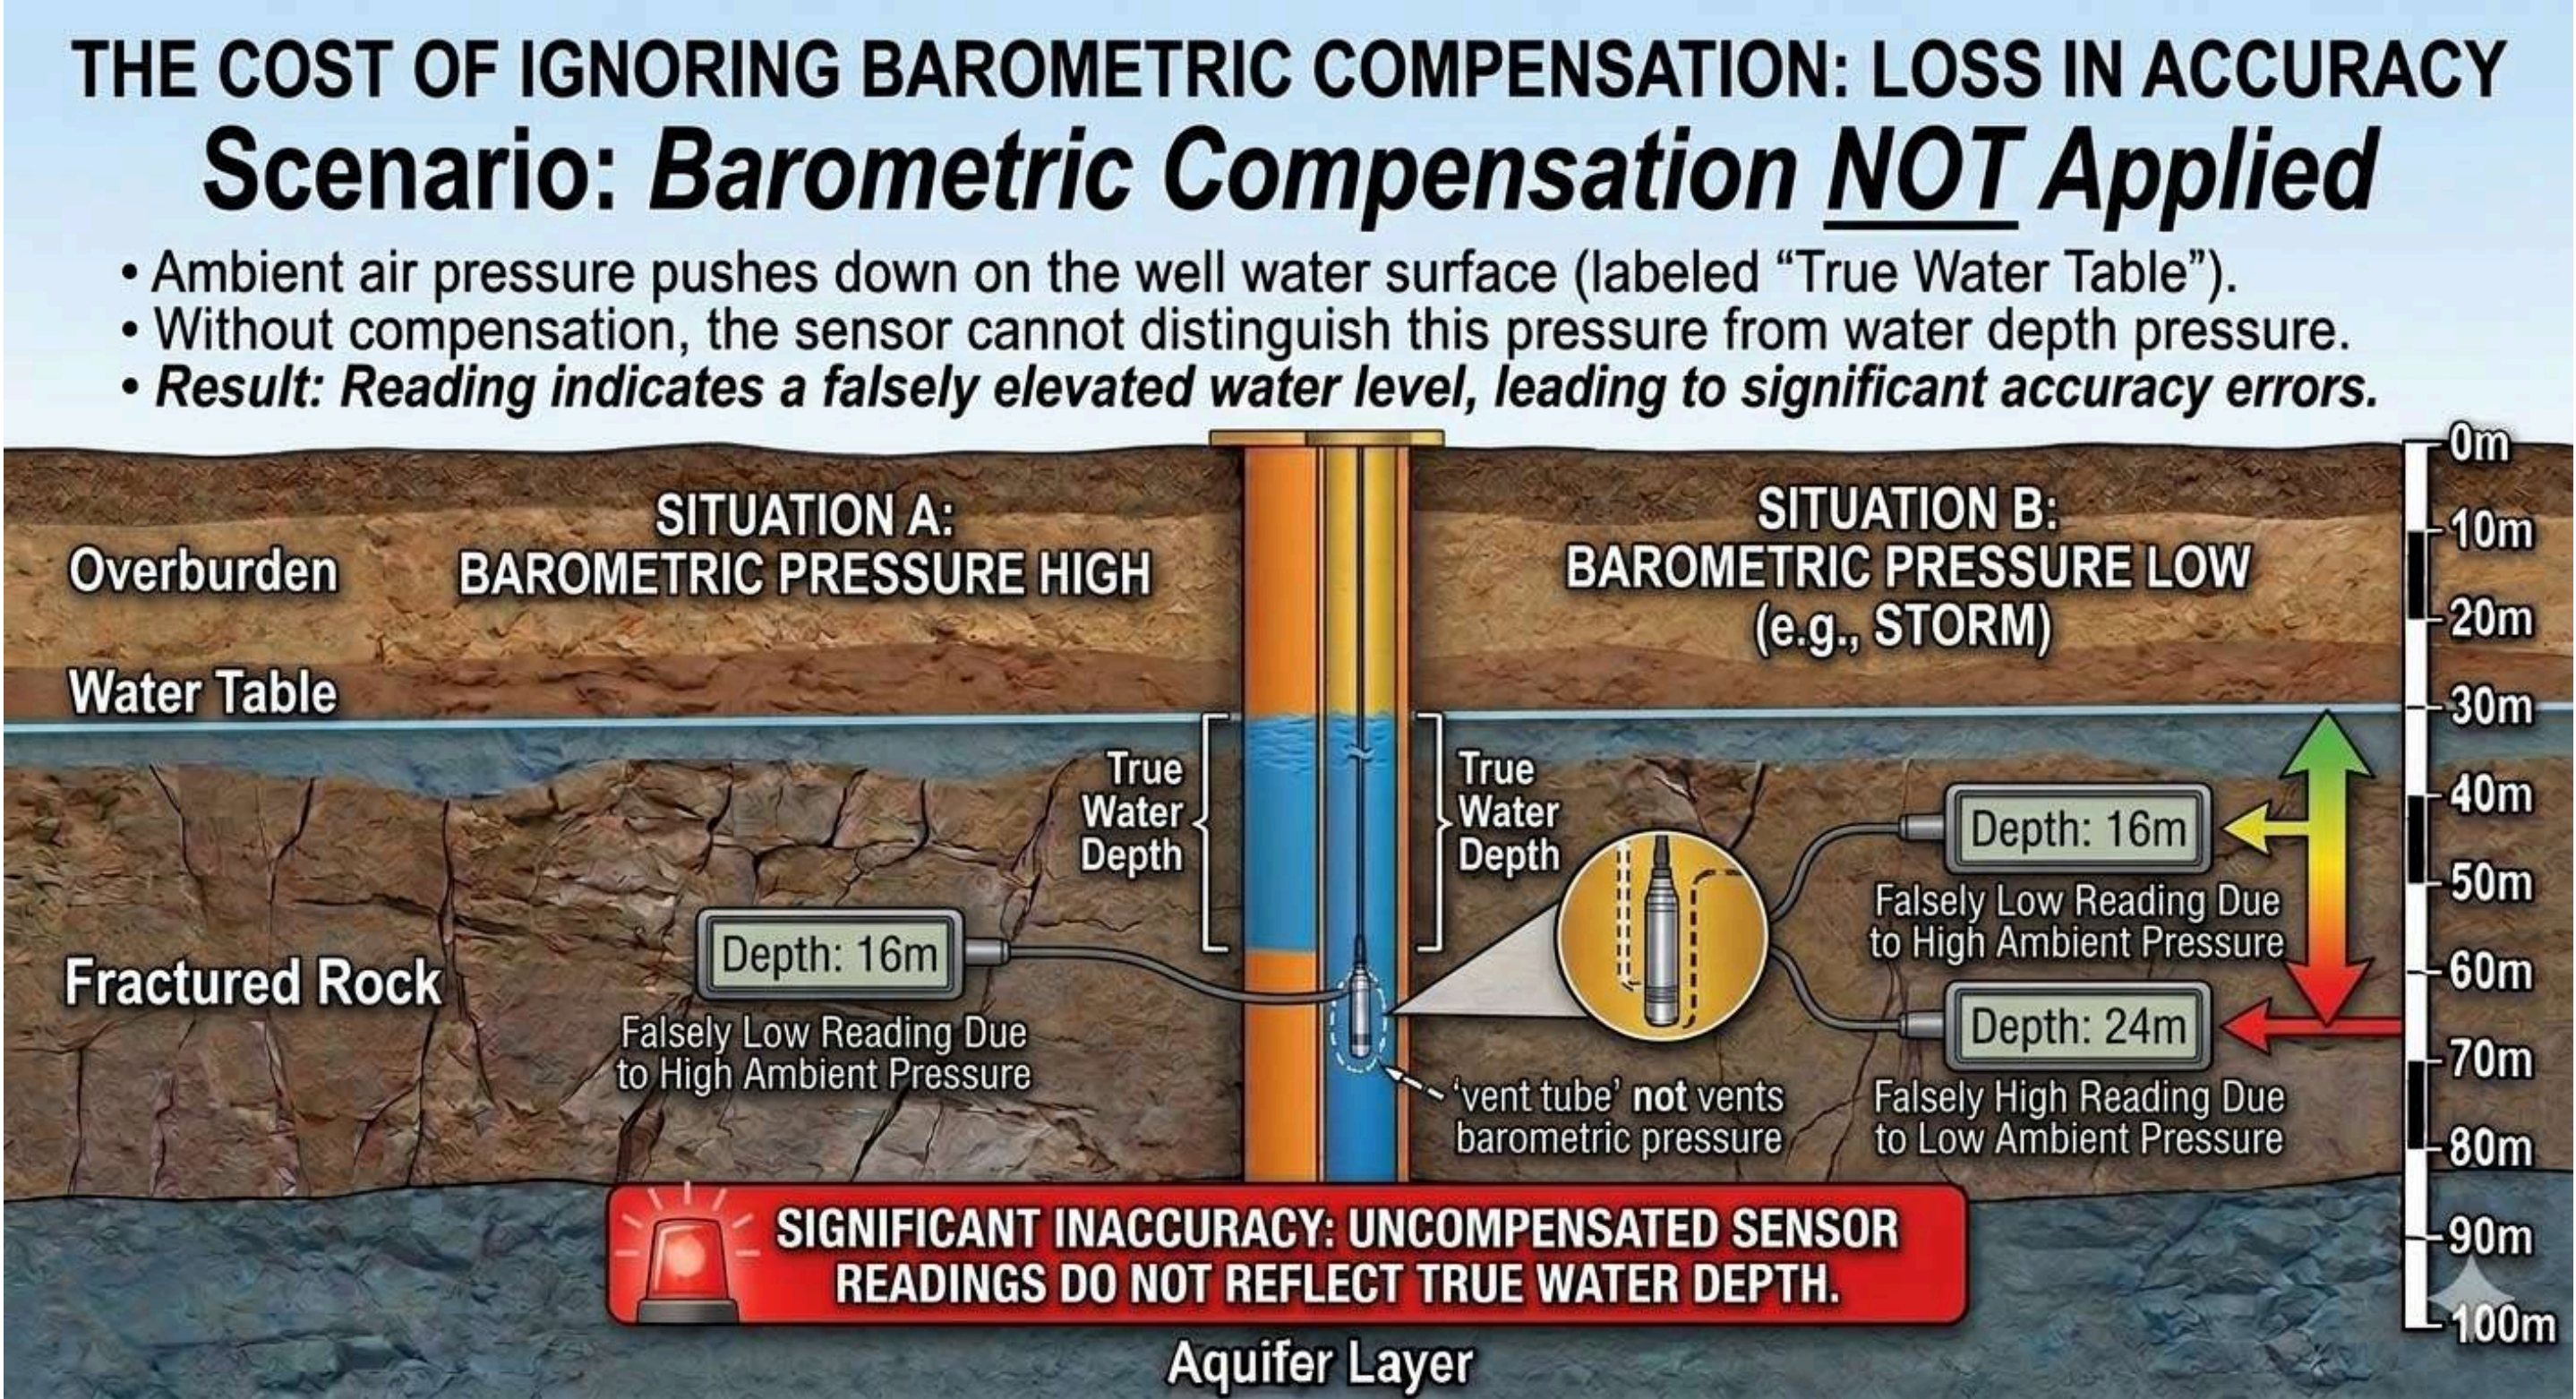

Why any type of cable cannot be used?

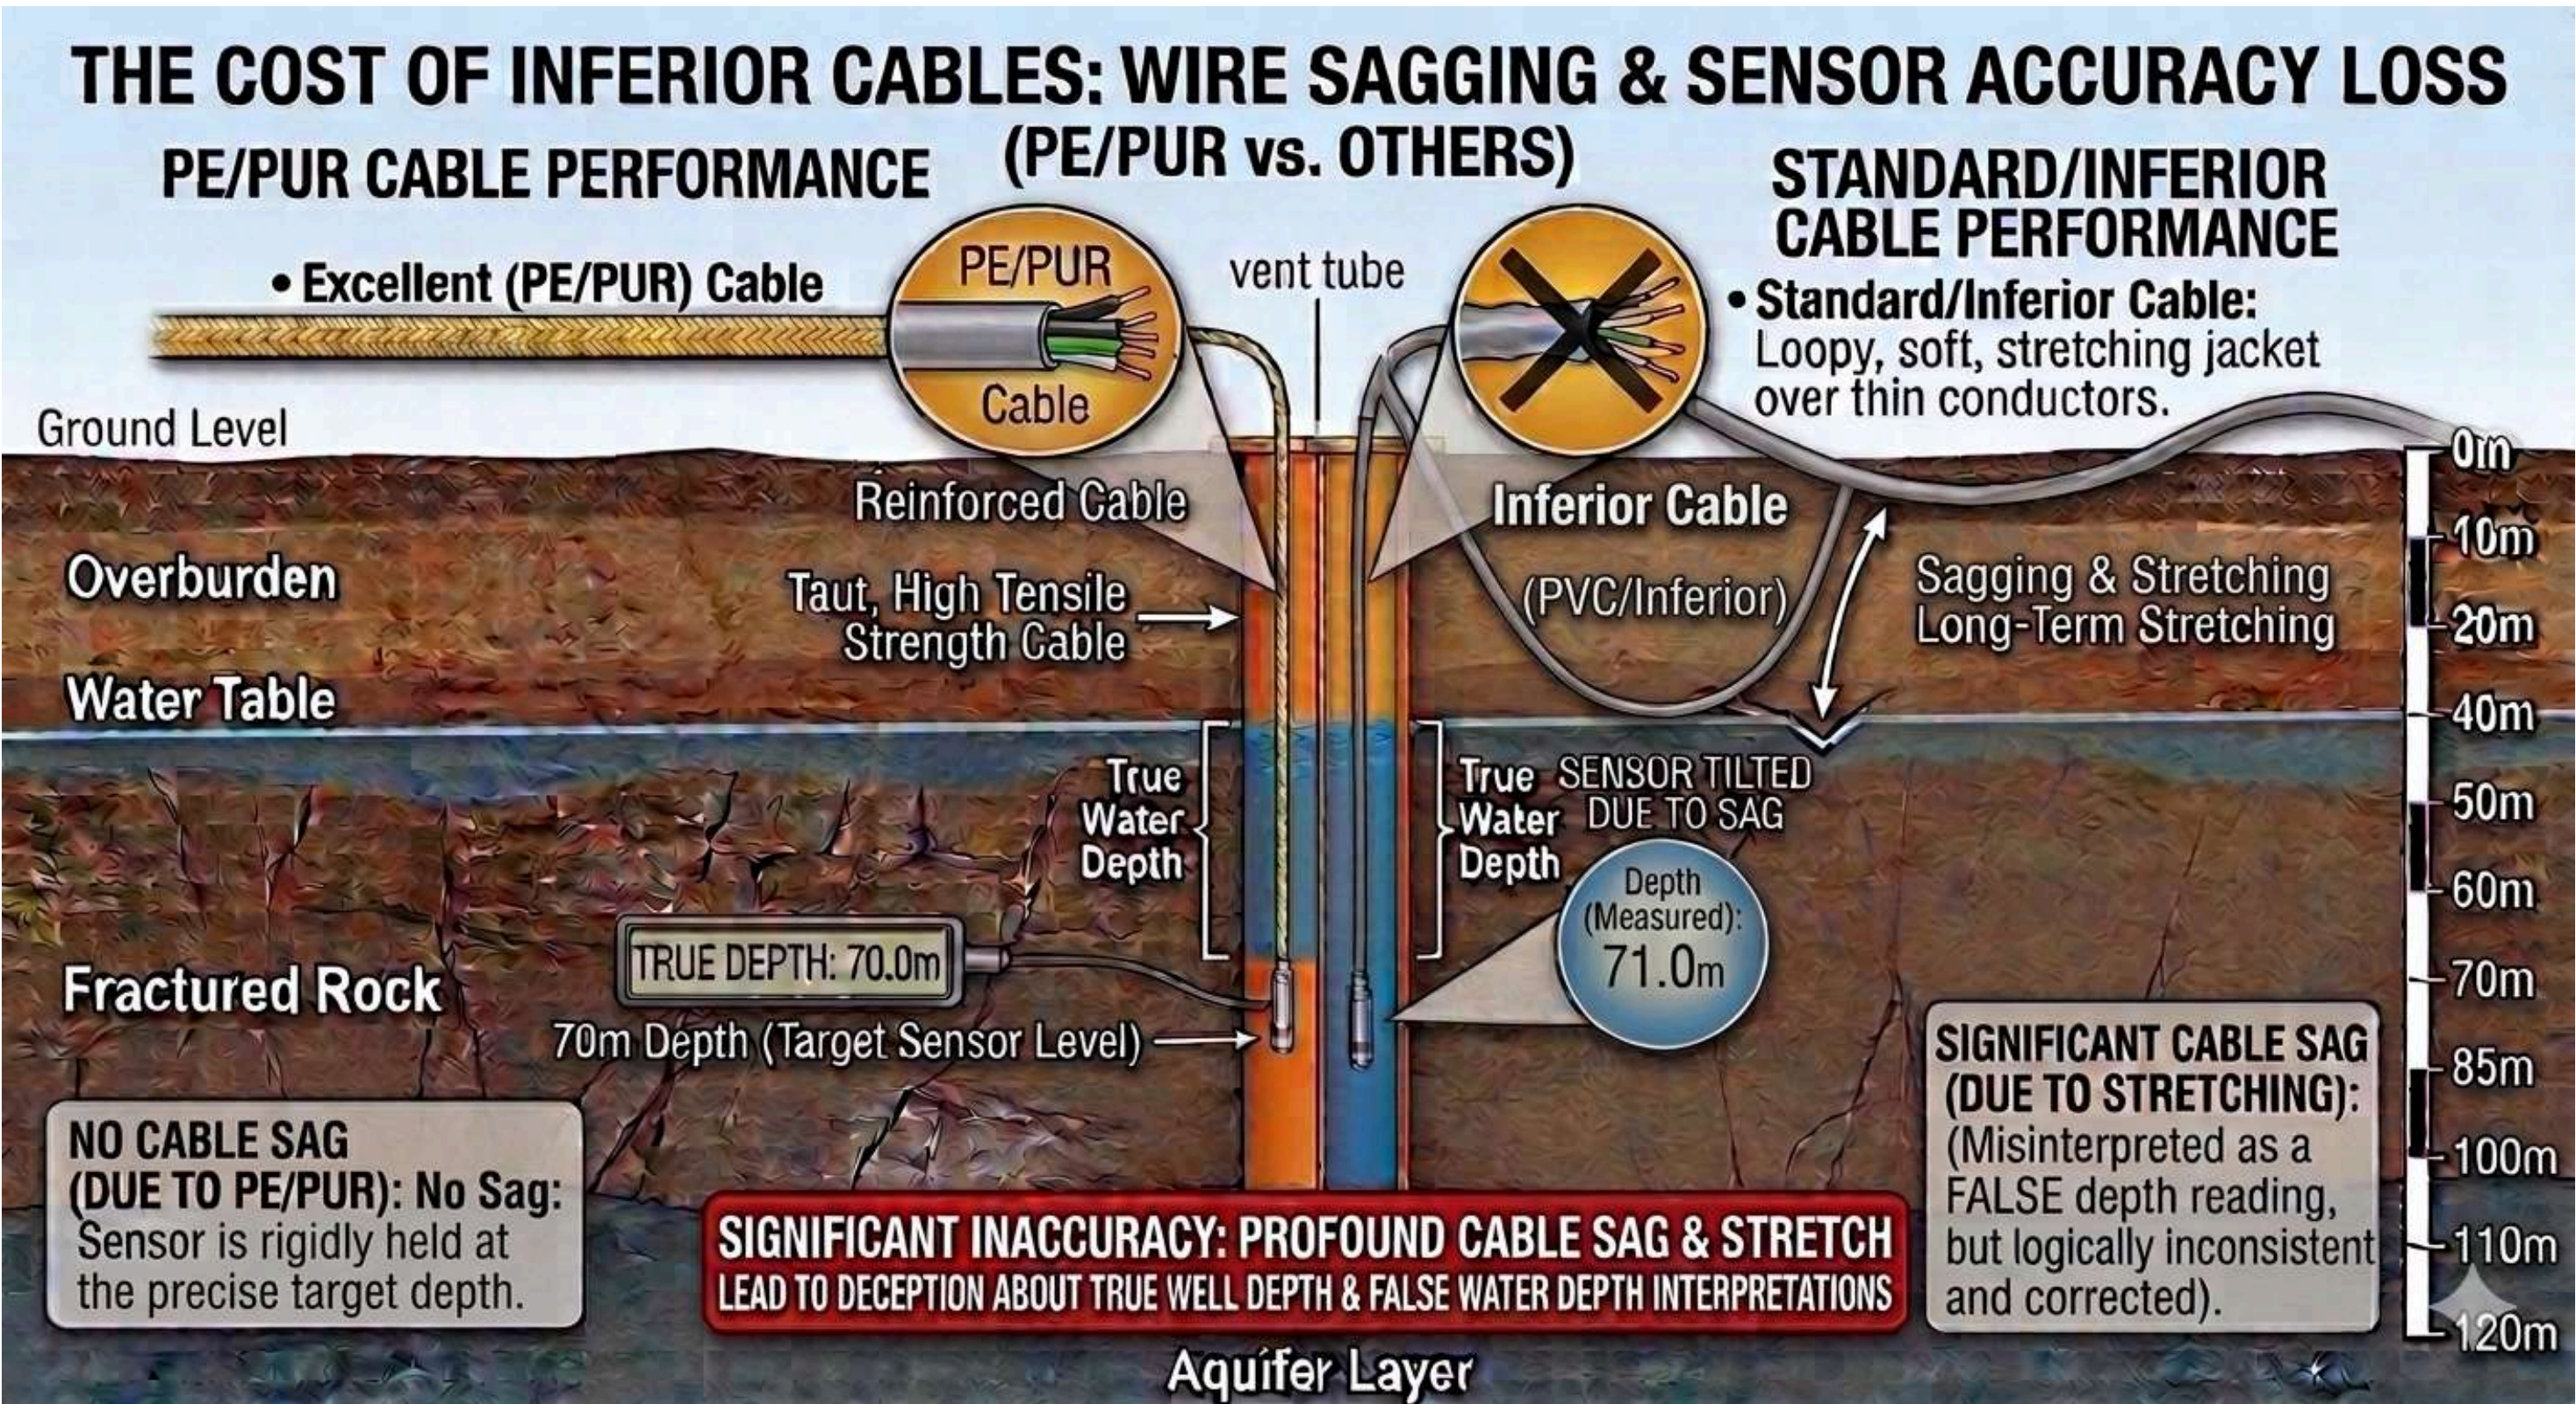




Scaling formation is very common and can block the sensor head and render the sensor nonfunctional.



Unlike cheap sensors, MIRA Piezo Level Sensors come with removable sensor heads.

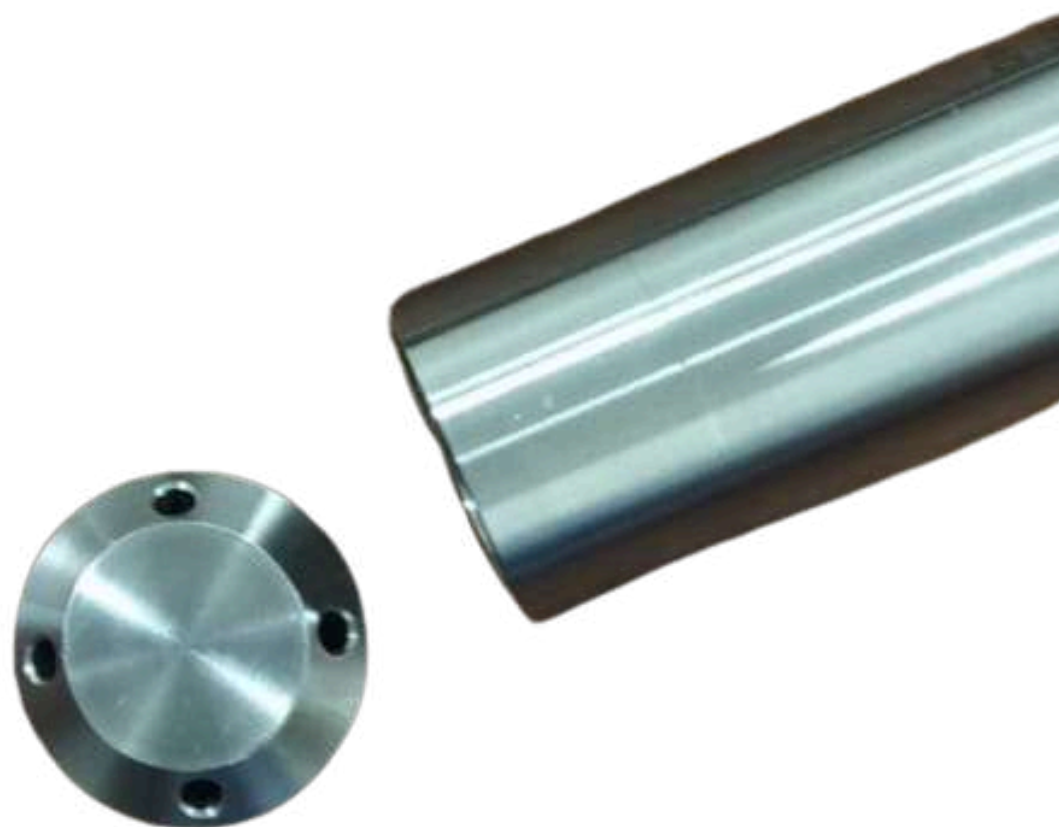

Clean the head and fix it to make the Piezo Sensor fully functional