EXPERIMENT - 9

AIM:

Implementation of Subnetting in Cisco Packet Tracer simulator

Creating a network Topology


To create a network topologys in Packet trace, select "New" button in TOP, Then select network & generic

Adding the device

To add a device, select the device from bottom left and drag it onto network topology.

Subnetting

To subnet the network address of 192.168.1.0/24 to Provide enough space for at least 5 address for end device, switch & router

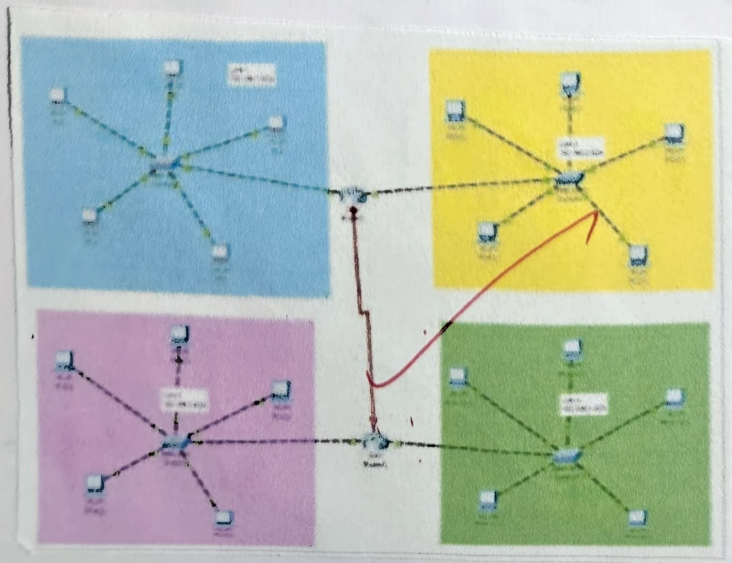

Configuring the devices:

Right click on router and select "CLI" will open the configuring the router. Right click CLI enter following commands

#enable
Configure terminal
interface FastEthernet
ip address {IPaddress} {subnet mask}
no shutdown
exit

interface Fast Ethernet 0/1
ip address {IPaddress} {subnet mask}
no shut down
exit.

TESTING THE NETWORK:

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num
	Successful	PC4(2)	Router2	ICMP		0.000	N	12
	Successful	PC4(2)	PC2(1)(1)	ICMP		0.000	N	13
	Successful	PC0	Router0	ICMP		0.000	N	14

Result:

The implementation of subnetting in Cisco Packet Tracer simulator was executed successfully.