RAPISCAN 627XR

Efficient X-ray screening for large baggage and parcels.

Large Parcel and Small Cargo Screening

Meets Global Regulatory Requirements

Network Enabled

Cost Effective

The Rapiscan 627XR is designed for screening small cargo as well as baggage and large parcels for air cargo and customs applications.

With a 1,000 mm wide by 1,000 mm high tunnel opening, the Rapiscan 627XR meets the stringent requirements of multiple global regulatory requirements including U.S. Transportation Security Administration (TSA), French civil aviation authority (STAC), and Transport of Canada (TC).

Automatic Detection of Explosives

Target™ automatically detects a wide range of explosives in real time during the scanning process by visibly highlighting a potential threat on the X-ray image.

Automatic Detection of Narcotics

NARCScan™ automatically detects a wide range of narcotics in real time during the scanning process by visibly highlighting a potential threat on the X-ray image.

Safety is Our #1 Focus

Rapiscan 627XR complies with U.S. Code of Federal Regulations (CFRs) on performance standards for ionizing radiation-emitting products, electronics products, radio frequency devices, qualification of screening personnel, occupational noise exposure and occupational safety and health standards.

Greatest Number of Operator-Assist Tools Enables Highest Throughput

With over 13 image processing tools and multiple automatic detection functions, the feature rich software helps the operator easily and accurately detect contraband for the highest throughput and least operator fatigue.

Industry-Leading Operator Training

Rapiscan Systems offers three comprehensive operator training programs: On-system Operator Training Program (OTP); standalone Computer Based Training software (CBT); and live in-person training with expert trainers in a one-to-one or classroom setting. All Rapiscan CBT programs are in full compliance with U.S. Transportation Security Administration (TSA) and European Union (EU) Commission Regulation 185/2010 requirements.

Regulatory Compliance

Rapiscan 627XR image quality performance is in compliance with regulation (EC) No. 300/2008. In addition, Rapiscan 627XR Threat Image Projection (TIP) is in compliance with regulation (EU) No. 185/2010.

Tunnel Opening (width x height):
1,000 x 1,000 mm (39.4 x 39.4 in)

Standard Features

Multi Energy Imaging (4 Color)

View Previous/Next Bag

Manual Image Archive

Configurable Image Processing Keys

Baggage Counter

Date / Time Display

Search Indicator

UPS (Uninterrupted Power Supply)

Remote Workstation

Flat Panel Monitor

Standard Image Processing Functions

Crystal Clear™

Black and White

Organic / Inorganic Stripping

Inverse Video

High Penetration

Pseudo Color

Low Penetration

Variable Edge Enhancement

Variable Color Stripping

Variable Gamma

Variable Density

Dynamic Continuous Zoom & Panning

Fixed Zoom (64x)

Rapiscan® systems

An OSI Systems Company

www.rapiscansystems.com

RAPISCAN 627XR

Physical Specifications

Dimensions: Length: 3,934 mm (154.9 in.)
                     Width: 1,388 mm (54.6 in.)
                     Height: 2,021 mm (79.6 in.)
Tunnel Size: 1,000 mm (W) x 1,000 mm (H) (39.4 x 39.4 in.)
Conveyor Speed: 0.20 m/sec (39.4 ft./min)
Conveyor Load: 165 Kg (364 lbs) evenly distributed
Conveyor Height: 840 mm (33.1 in.)
Approx Weight: Net: 1,160 Kg (2,557 lbs)
System Power: 115/230 VAC ±10% / 60/50Hz

Standard X-Ray Generator and Image Performance*

Steel Penetration: 28 mm guaranteed; 30 mm typical
Wire Resolution: 38 AWG guaranteed; 40 AWG typical
Material Separation: Low Z, Medium Z, High Z to 0.5 Z accuracy
Generator Cooling: Sealed oil bath with forced air
Anode Voltage: Operating at 140kV
Tube Current: 0.7 mA
Orientation: Vertically Upward

High Penetration X-Ray Generator Option and Image Performance*

Steel Penetration: 35 mm guaranteed; 40 mm typical
Wire Resolution: 38 AWG guaranteed; 40 AWG typical
Anode Voltage: Operating at 160kV
Tube Current: 1.0 mA

Operating Environment

Storage Temperature: -20°C to 50°C
Operating Temperature: 0°C to 40°C
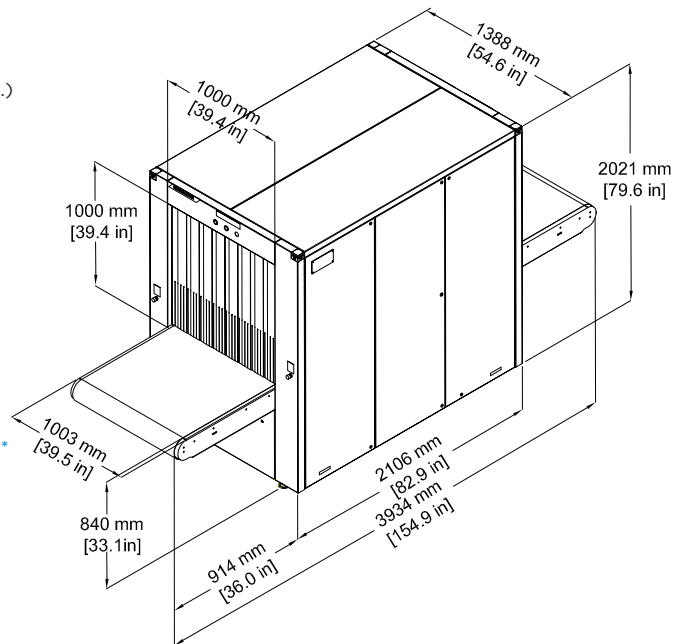Relative Humidity: 5 to 95% non-condensing

Health & Safety

Rapiscan Systems' cabinet X-ray products comply with all applicable US FDA and equivalent international regulatory agency requirements, contained in the cabinet X-ray radiation safety performance standard [21 CFR 1020.40] and the general performance standard [21 CFR Part 1010]. Rapiscan Systems certifies each cabinet X-ray product has a maximum radiation emission leakage of less 1 μSv/hr (0.1 mR/hr) from all external surfaces of the cabinet X-ray system.

Options and Accessories

Target™ / Interactive Target™
(Automatic detection of solid explosives)

NARCScan™
(Automatic detection of narcotics)

Density Threshold Alert (DTA)

Threat Image Projection (TIP)

Threat Image Projection Network (TIPNet)

NETView™
(Remote network image archive review)

NEXLink™
(Advanced network X-ray management automation and link system)

Multi-System Alarm Resolution Network Display Station (NDS)

Automatic Image Archiving

Enhanced Image Archiving

Computer Based Operator Training (CBT)

Operator Training Program (OTP)

Manual Scan

Operator Pedestal

Foot-mat

Optical Operator Presence Sensor

SmartCard Login

Power Conditioner

Conveyor Accessories

Remote Workstation

High Penetration X-ray Generator

Universal Printer Support

*Stated performance as measured by Rapiscan Imaging Validation Test Kit.

With continual development of our products Rapiscan Systems reserves the right to amend specifications without notice. Product pictures are for general reference. Please note that due to US laws and regulations, not all Rapiscan products are available for sale in all countries without restriction. Please contact your Rapiscan Systems sales representative for more information.

Rapiscan Systems is
ISO 9001:2008 Certified

An OSI Systems Company

ONE COMPANY - TOTAL SECURITY

www.rapiscansystems.com

9150110-8   061213