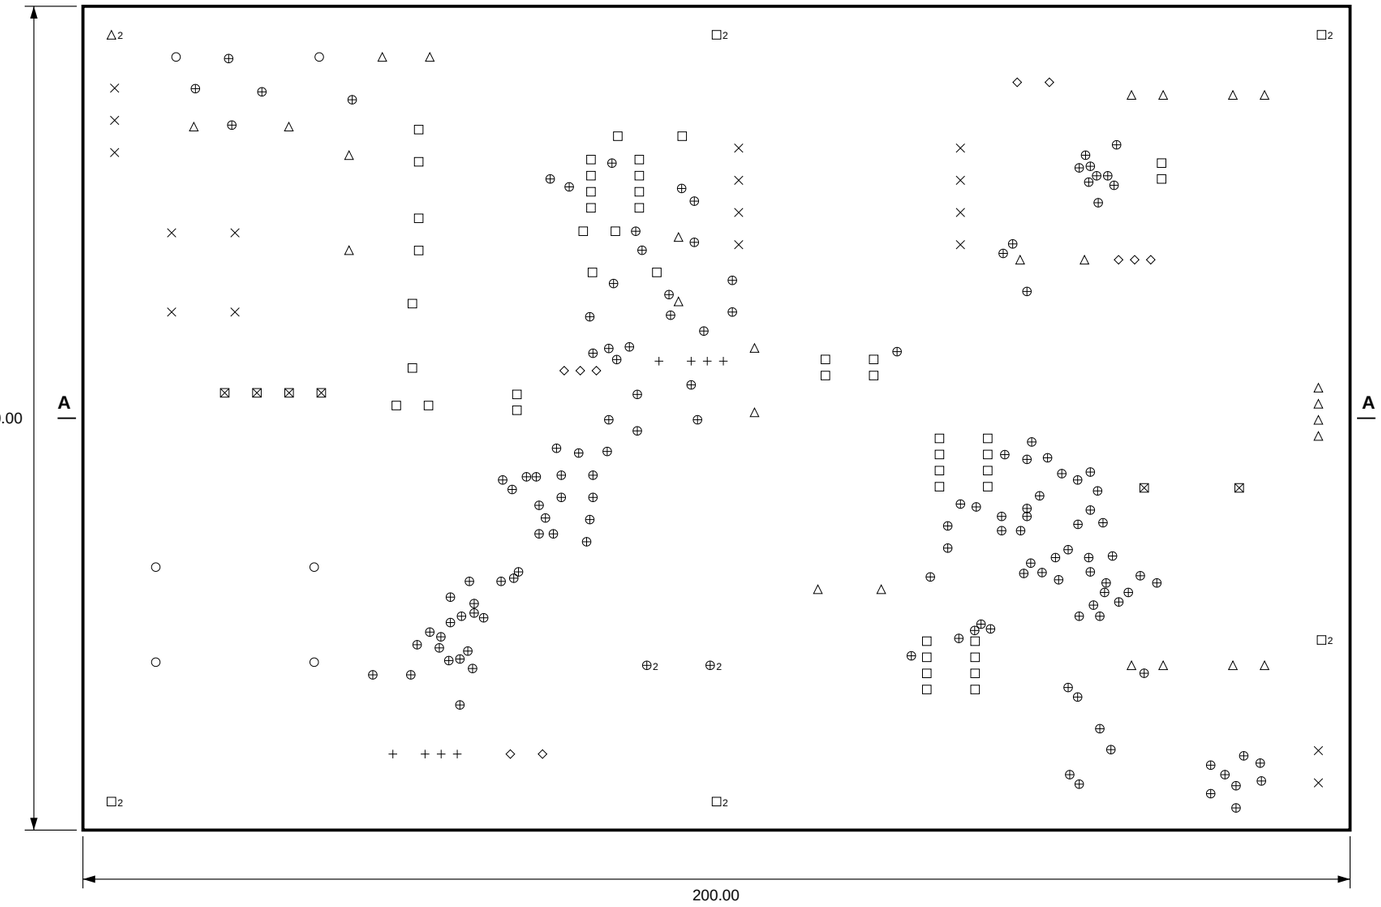


DRILL TABLE

Symbol	Finished size (mm)	Plated	Count
⊕	0.35	yes	140
□	0.80	yes	46
△	1.00	yes	26
◇	1.20	yes	10
×	1.30	yes	17
○	1.40	yes	6
+	1.50	yes	8
⊠	1.60	yes	6
⊕₂	2.00	yes	2
□₂	3.20	no	5
△₂	3.20	yes	1

STACK-UP / LAYER LEGEND


Layer	Type	Thickness (mm)
Top	copper	0.035
Core	dielectric	1.530
Bottom	copper	0.035

NOTES


1. Material: FR-4 (standard, Tg 140 °C), finished thickness 1.60 mm, 2 copper layers.
2. Copper: 1.00 oz finished on outer layers.
3. Solder mask: green, both sides. Silkscreen: legend layers.
4. Hole sizes are finished sizes; plated +/-0.08 mm, non-plated +/-0.05 mm.
5. Dimensions in millimetres; origin at the board's lower-left corner (as the Gerbers).
6. Drawing scale 1.03 : 1. Fabricate to IPC-6012 Class 2 unless stated.

Title **SMPS 230 VAC to 5-48 V 5 A (CC/CV)**	Sheet 1 of 2
Sheet **Fabrication drawing**	Size A3
Company	Rev / Date / Drawn

ASSEMBLY (ISOMETRIC)

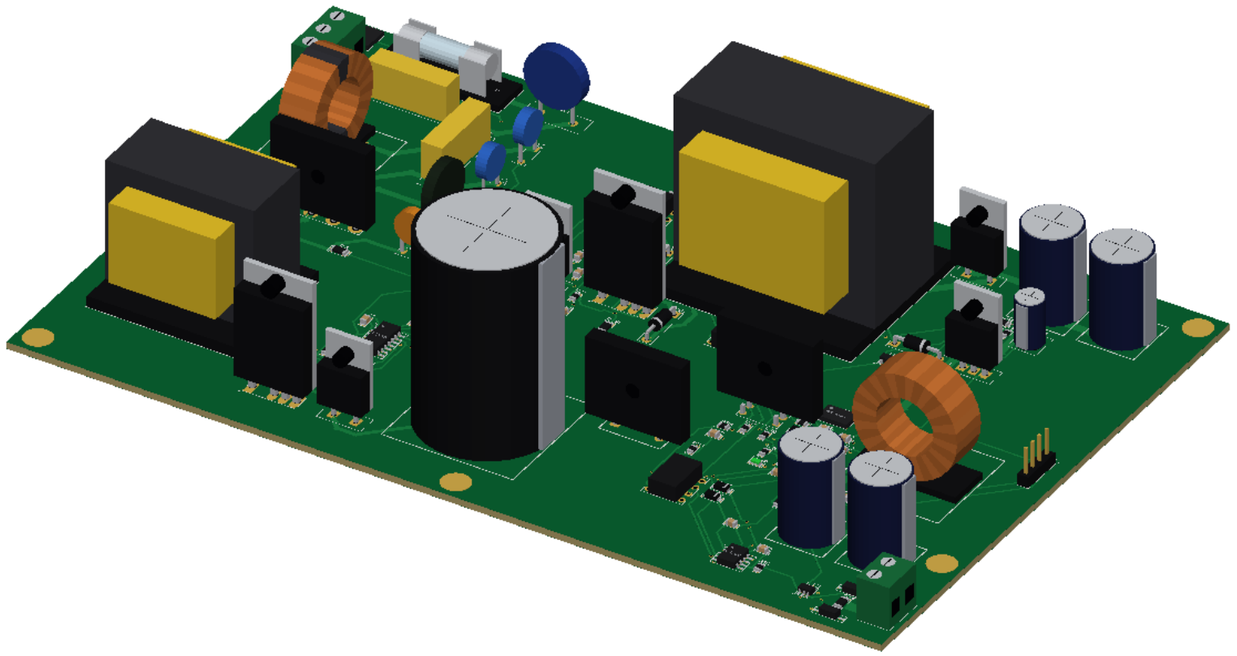

EXPLODED VIEW

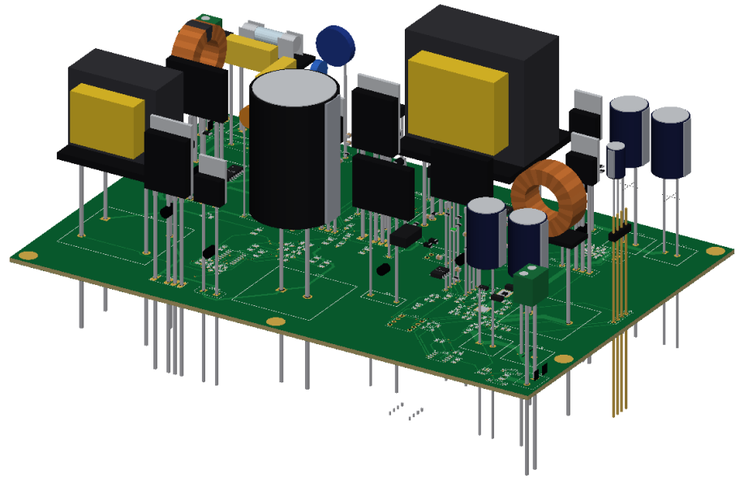

SECTION A-A

Exploded: part bodies lifted 30.00 mm off each side.

Section A-A: cut at y = 65.00 mm, seen from the front.

Title: **SMPS 230 VAC to 5-48 V 5 A (CC/CV)**	Sheet 2 of 2
Sheet: **Fabrication drawing - 3D views**	Size: A3
Company	Rev / Date / Drawn