


1. In the simulation model, the newly created entity is assigned one of the four SKUs based on discrete probability distribution, each has probability of **0.25**.
2. At the same time, the standard weight is assigned, in accordance with SKU type

1. Blanking time is not constant. First of all the process time represented by normal distribution, secondly It depends on current demand and equals to $NORM(900,30)+(v_DemandX)*2$, where $v_DemandX$ is a variable which represents current demand of an SKU
2. Required number of resources: 1
3. Required resource: $r_Blanking$

Times are in seconds

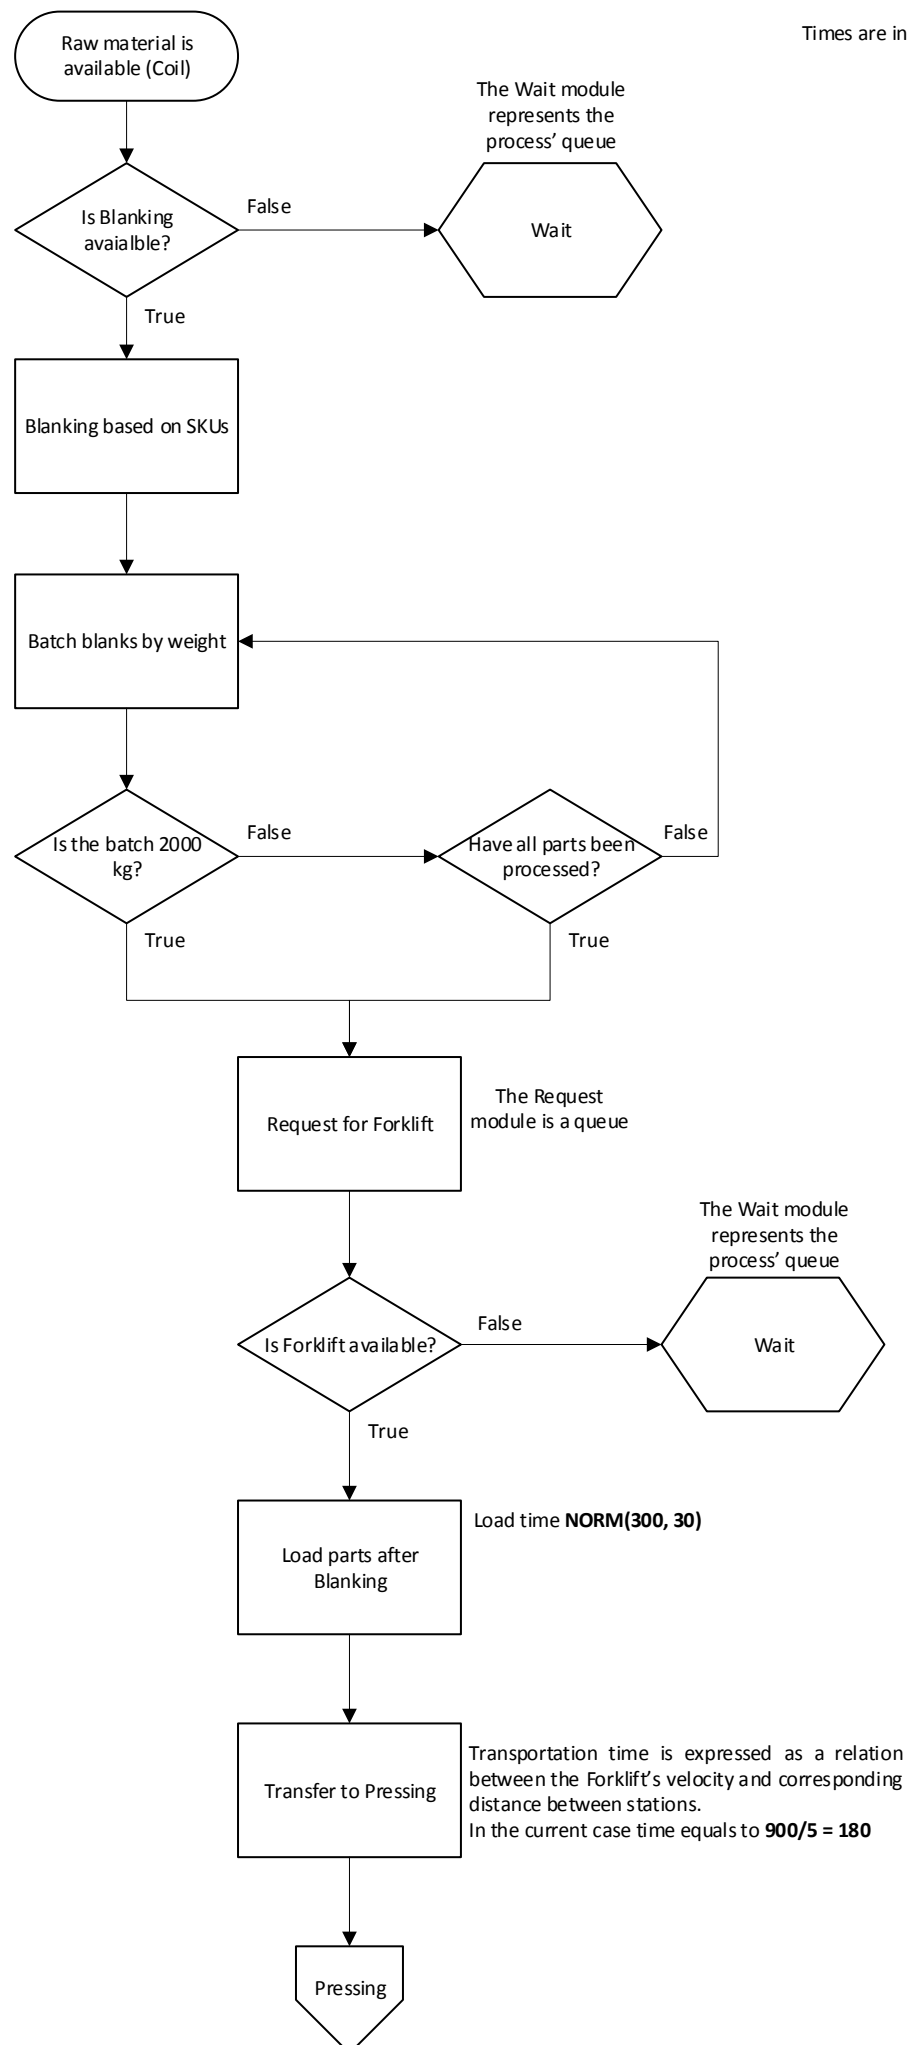



1. In the current case pressing time is similar for all of the Presses

NORM(5, 0.1),

however the model has capacity to make it different.


2. Capacity of the resources also similar for each Press type and equals to 2.

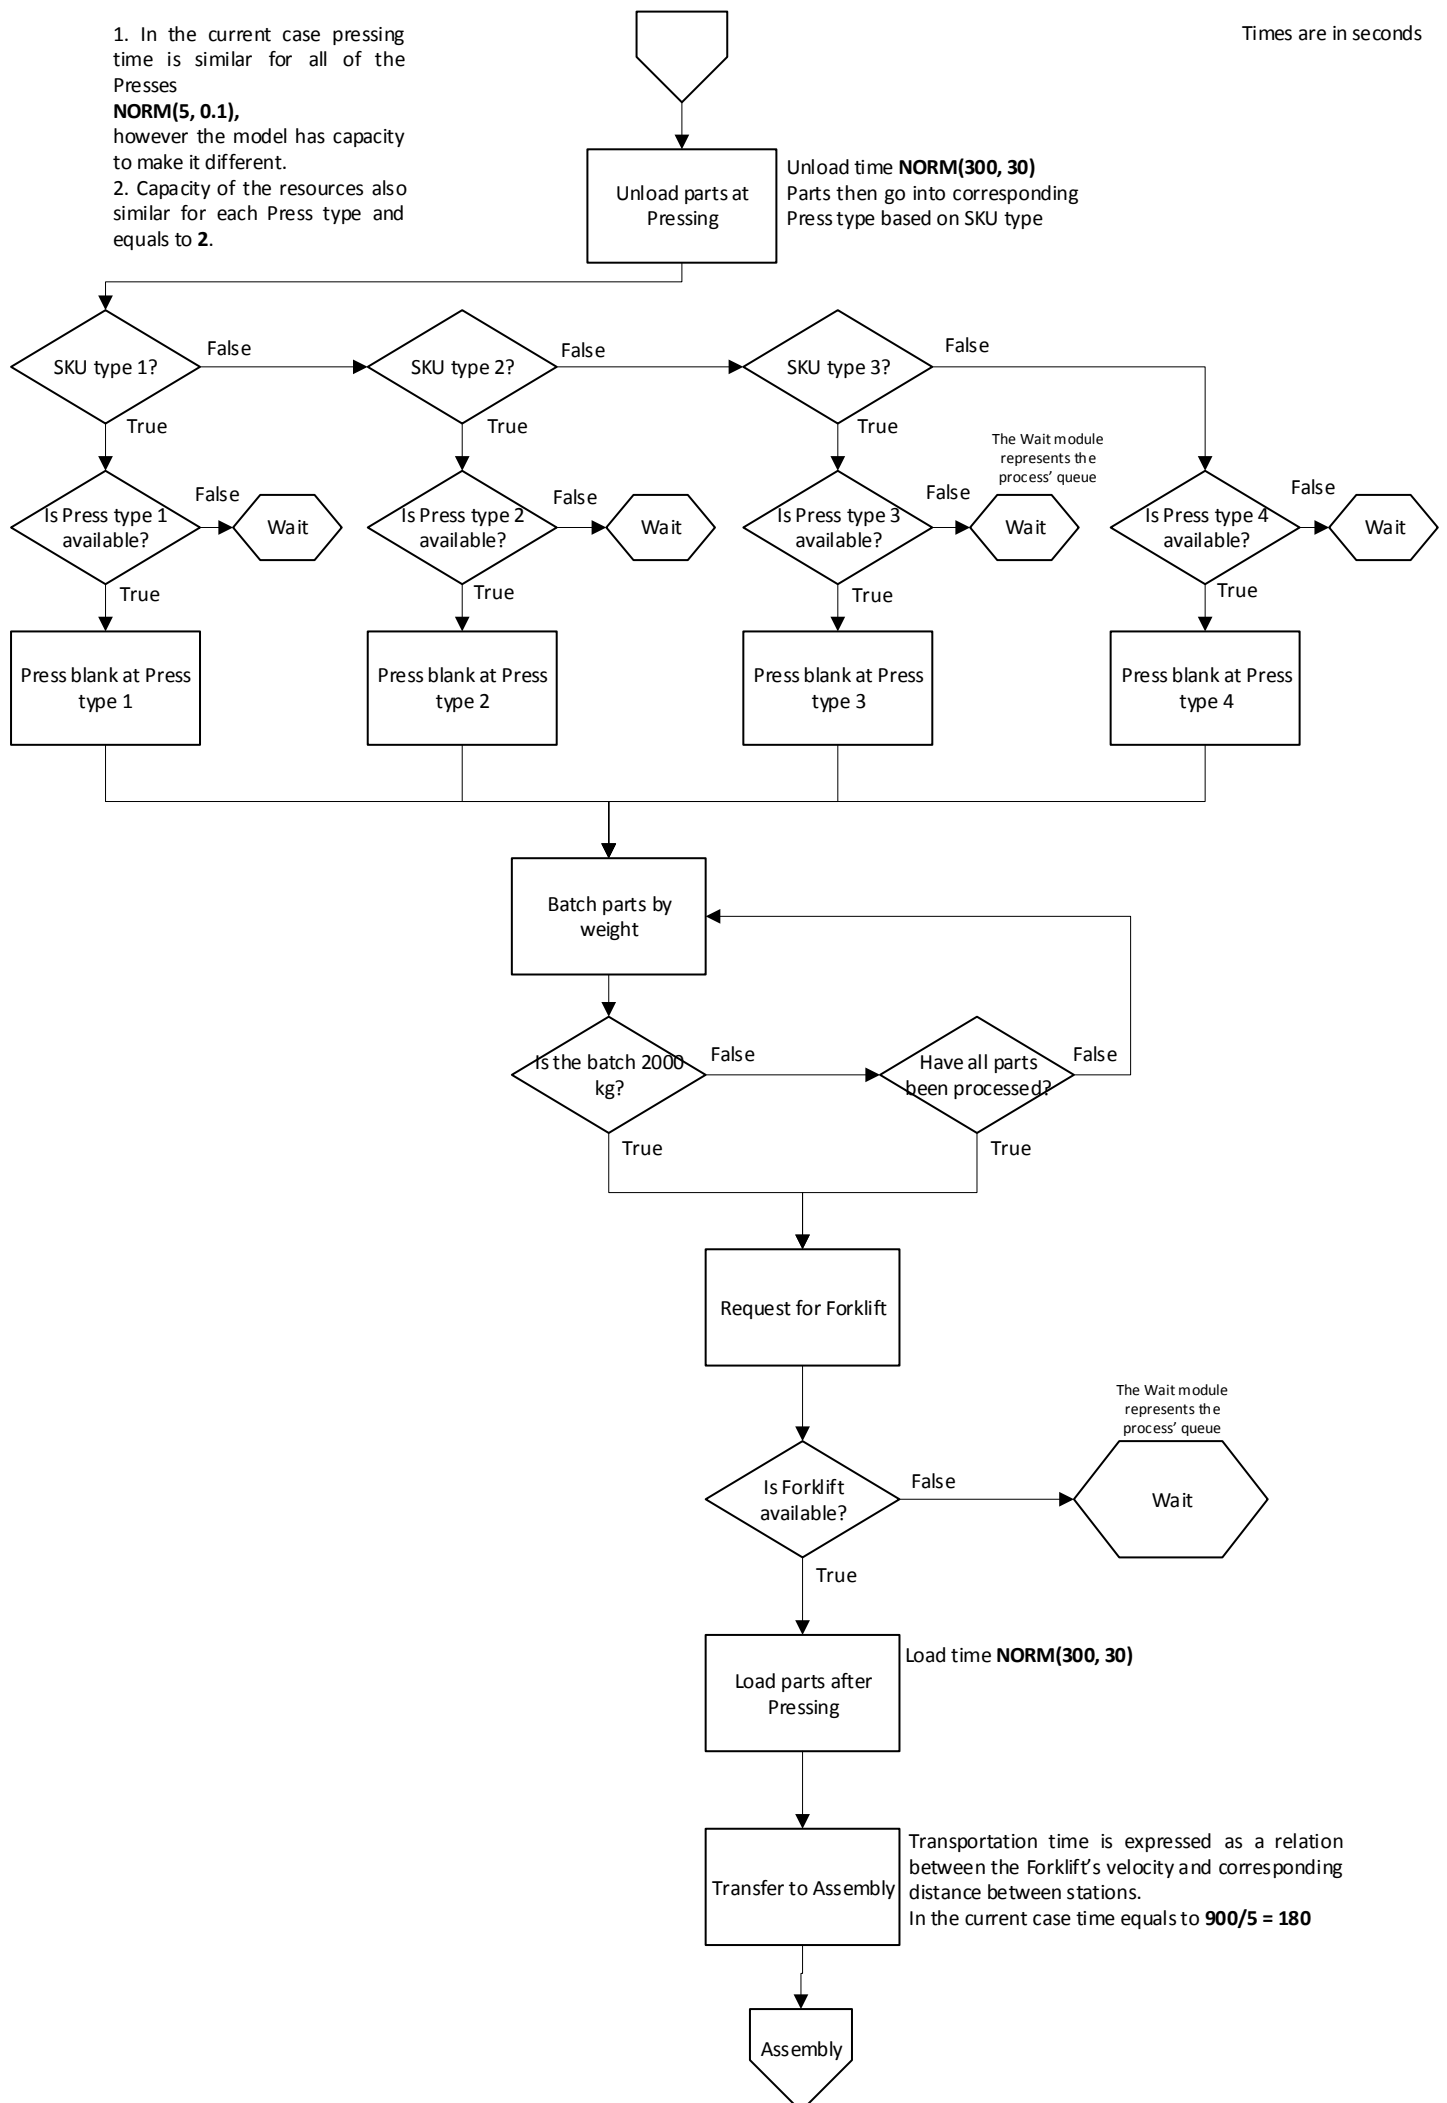

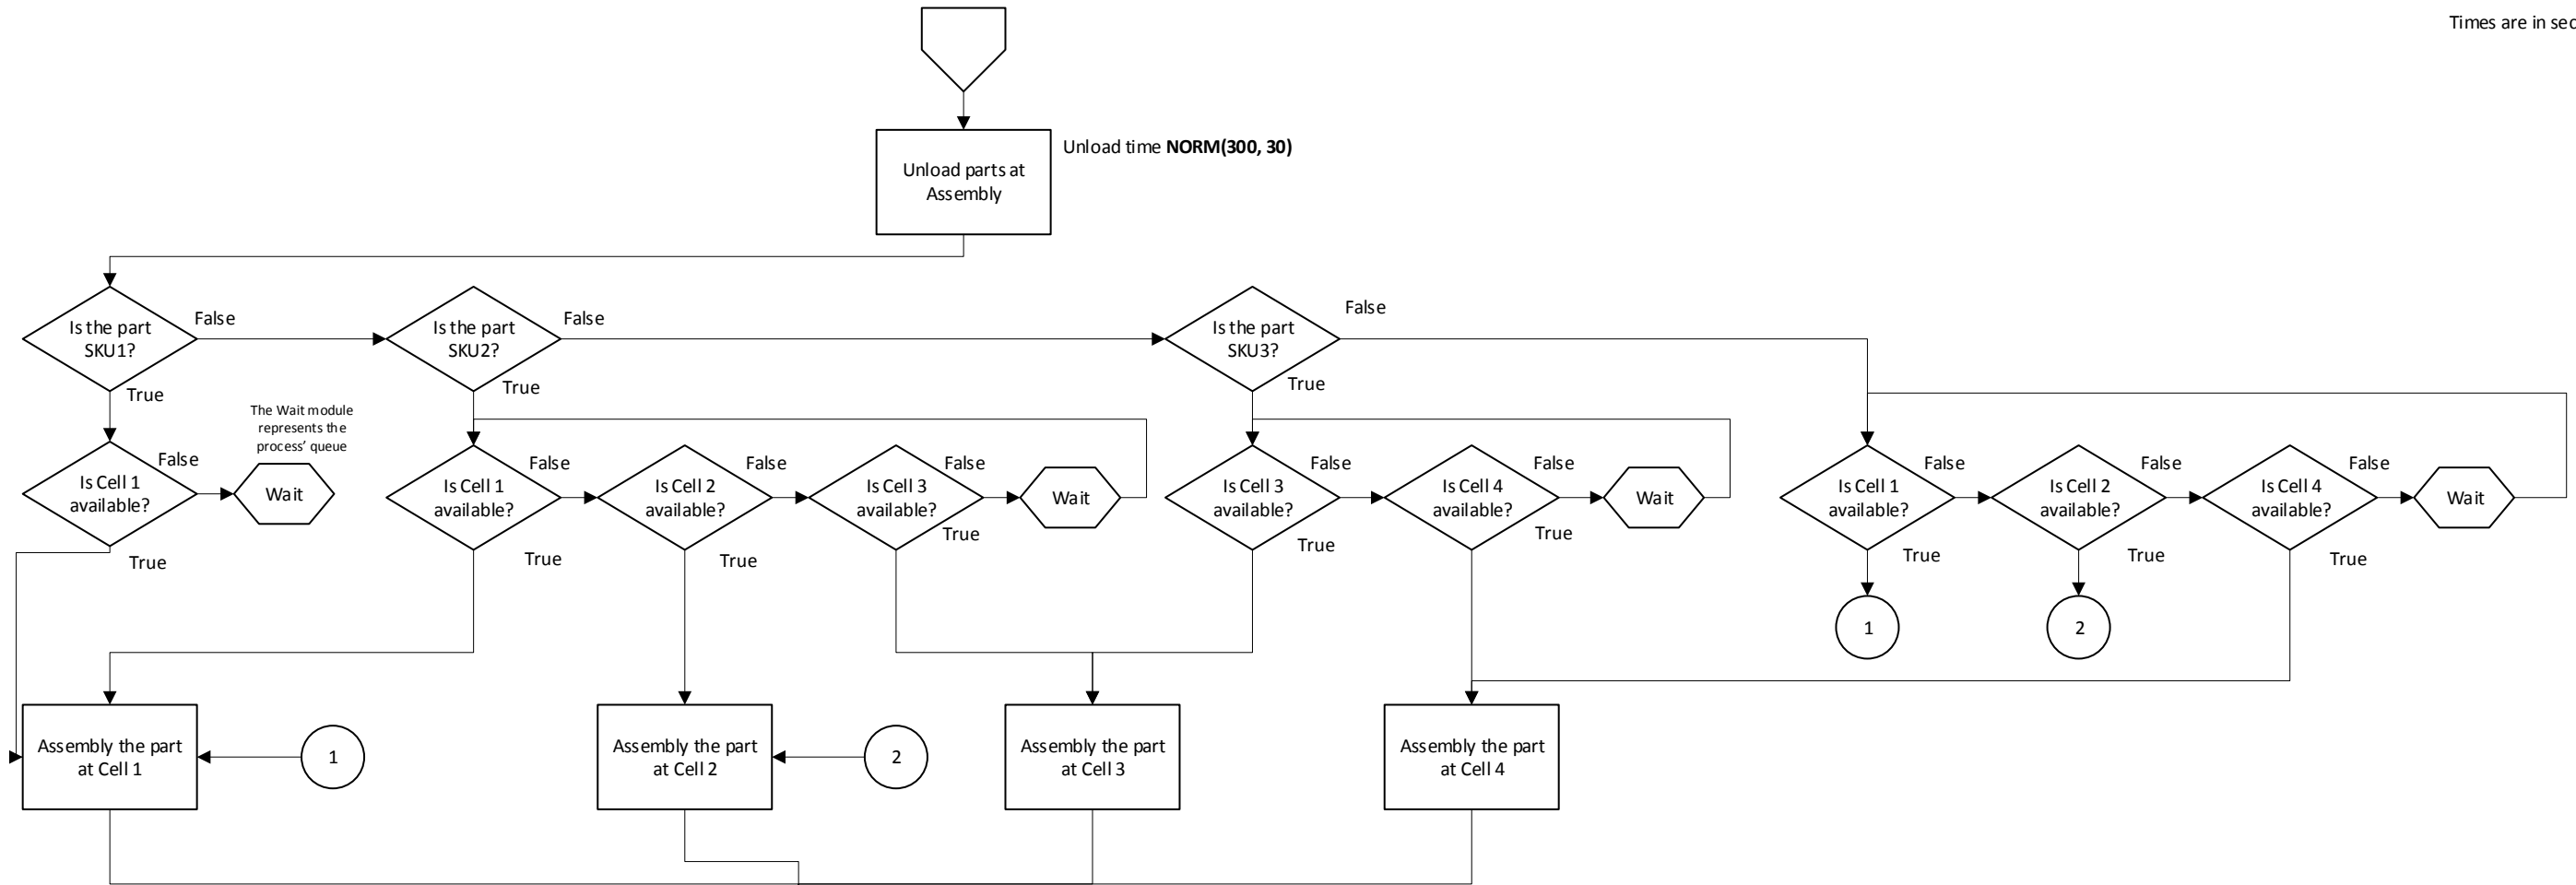

1. Assembly is a shared facility area, where a part can be assembled in different Cells, based on SKU type.
SKU1 can be assembled only in Cell 1
SKU2 can be assembled in Cell 1, Cell 2 and Cell 3
SKU3 can be assembled in Cell 3 and Cell 4
SKU4 can be assembled in Cell 1, Cell 2 and Cell 4
2. Assembly time depends on SKU type and assigned in the simulation model just before a part goes into a Cell.
SKU1 assembly time is **NORM(25,0.1)**
SKU2 assembly time is **NORM(15,0.1)**
SKU3 assembly time is **NORM(23,0.1)**
SKU4 assembly time is **NORM(17,0.1)**
3. Number of available Cells also differ from cell to cell:
Cell 1 has capacity of **8**
Cell 2 has capacity of **2**
Cell 3 has capacity of **2**
Cell 4 has capacity of **4**

Transportation time is expressed as a relation between the Forklift's velocity and corresponding distance between stations.
In the current case time equals to **300/5 = 60**

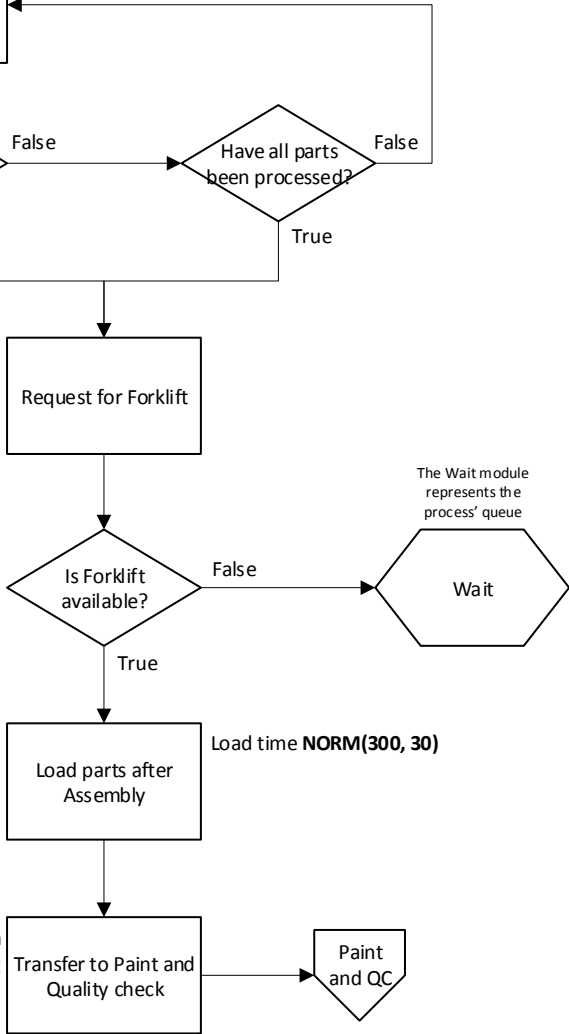

Paint station is simulated as a process, however it is a conveyor. Every part spend constant amount of time – **5400**.

