Ex:3 EXPERIMENTS ON CISCO PACKET TRACER


AIM:


To analyse the behaviour of network devices using CISCO Packet TRACER simulator.

1. From the network component box, click and drag and drop the below components
   a. 4 Generic PCs and one HUB
   b. 4 Generic PCs and one Switch
2. Click on connections
   a. Click on copper - straight through cable
   b. Select one of the PC and connect it to HUB using the cable. The link LED should glow in green, indicating that the link is up.
   Similarly connect remaining 3 PCs to the HUB
   c. Similarly connect 4 PCs to the switch using copper - straight - through cable.
3. Click on the PCs connected to HUB, go to desktop tab, click on IP Configuration and enter IP address and subnet mask. Click on PDU (message icon) from one another PC connected to the HUB.
4. Observe the flow of PDU from source PC to destination PC by selecting the Relative mode of simulation
5. Repeat step #3 to step #5 for the PCs connected to the switch.
6. Observe how HUB and switch are forwarding the PDU



Scanned with OKEN Scanner

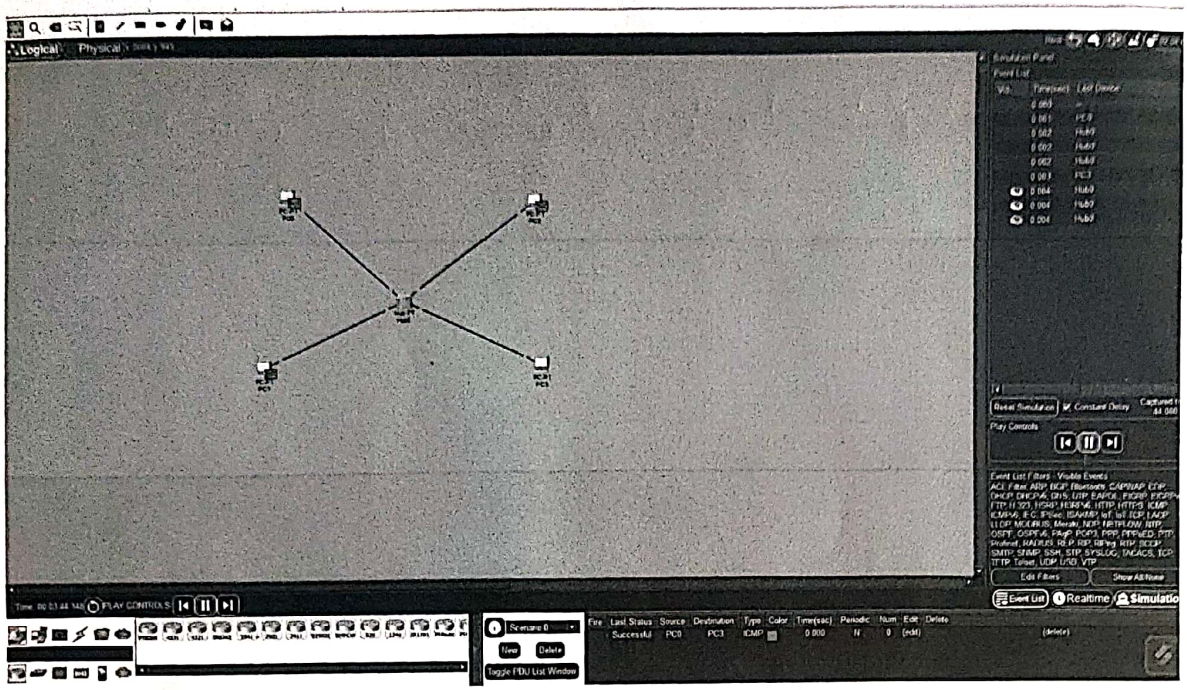

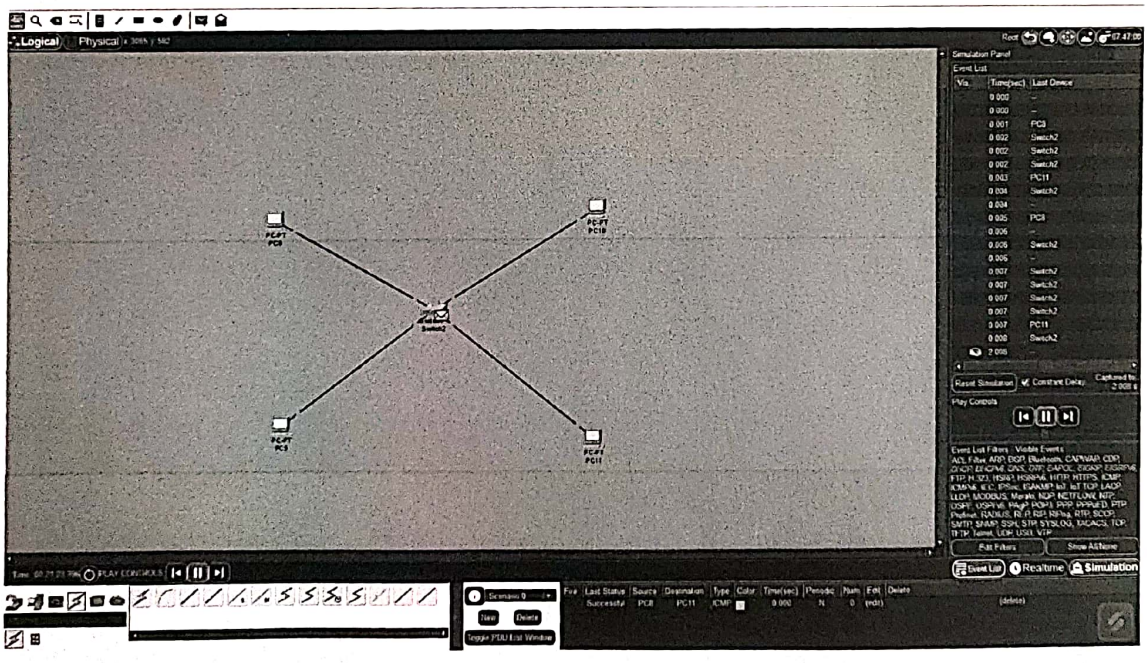

RESULT:

Thus the flow has been successfully observed.

Scanned with OKEN Scanner