EXPERIMENT - 9

AIM:

Implementation of subnetting in Cisco Packet tracer simulator.

Creating a network topology:


To create a network topology in Packet trace, select "New" button in top, then select network & generic.

Adding the devices:

To add a device, select the device from bottom left and drag it onto network topology.

Subnetting:

To subnet the network address of 192.168.1.0/24 to provide enough space for at least 5 address for end device, switch & router

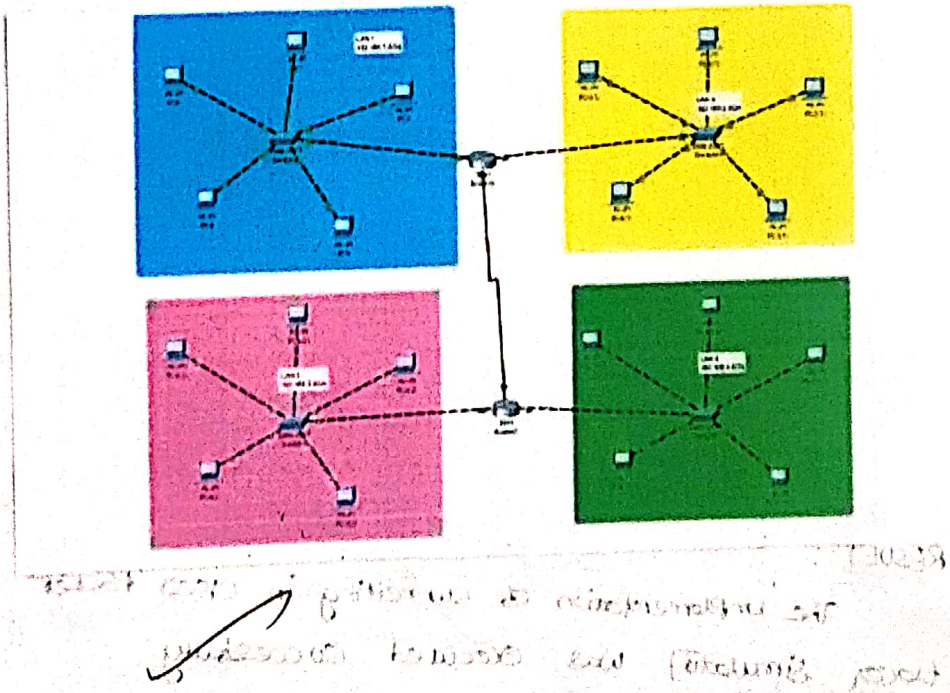

configuring the devices:

Right click on router and select "CLI" will open by configuring the router

Right click CLI enter following commands

```
# enable
# configure terminal
# interface Fast Ethernet 0/0
# ip address {IP address} {subnet mask}
# no shutdown
# exit
interface Fast Ethernet 0/1
ip address {IP address} {subnet mask}
no shutdown
exit
```

TESTING THE NETWORK:

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num
	Successful	PC4(2)	Router2	ICMP		0.000	N	12
	Successful	PC4(2)	PC2(1)(1)	ICMP		0.000	N	13
	Successful	PC0	Router0	ICMP		0.000	N	14

RESULT:

The implementation of subnetting in Cisco Packet tracer simulator was executed successfully.

Scanned with OKEN Scanner