

M32F103C8Tx

File

Window

Help

STM32F103C8Tx > STM32.loc - Pinout & Configuration

Configuration

Clock Configuration

Software Packs

Pinout

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator

Low Speed Clock (LSE) Disable

☐ Master Clock Output

Configuration

Reset Configuration

Parameter Settings

User Constants

NVIC Settings

GPIO Settings

Configure the below parameters :

Search (Ctrl+F)

System Parameters

VDD voltage (V)

3.3 V

Prefetch Buffer

Enabled

Flash Latency (WS)

0 WS (1 CPU cycle)

RCC Parameters

HSI Calibration Value

16

HSE Startup Timeout Value (ms)

100

LSE Startup Timeout Value (ms)

5000

MX

MX

File Explorer

File Explorer

Edge

Chrome

Task View

Search

LEGION

8Tx

File

Window

Help

STM32.loc - Pinout & Configuration

uration

Clock Configuration

Software Packs

GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIO I2C RCC SYS

Search Signals

Search (Ctrl+F)

☐ Show only Modified

Pin Na...	Signal on ...	GPIO outp...	GPIO mode	GPIO Pull...	Maximum ...	User Label	Mod
PA13	SYS_JTM...	n/a	n/a	n/a	n/a		
PA14	SYS_JTC...	n/a	n/a	n/a	n/a		

? Select Pins from table to configure them. Multiple selection is Allowed.



LEGIO

03C81x

File

Window

Help

STM32.Ioc - Pinout & Configuration

Configuration

Clock Configuration

Software Packs

Pinout

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator

Low Speed Clock (LSE) Disable

☐ Master Clock Output

Configuration

Reset Configuration

Parameter Settings

User Constants

NVIC Settings

GPIO Settings

Search Signals

Pin Name	Signal on Pin	GPIO output I...	GPIO mode	GPIO Pull-up/...	Maximum out...
PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	n/a
PD1-OSC_...	RCC_OSC_...	n/a	n/a	n/a	n/a

MX

MX

Windows logo icon

File Explorer icon

Edge browser icon

Chrome browser icon

Task View icon

Search icon

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator

Low Speed Clock (LSE) Disable

☐ Master Clock Output

Configuration

Reset Configuration



Parameter Settings



User Constants



NVIC Settings



GPIO Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub P
RCC global interrupt	☒	0	0

MX

MX



C8Tx

File Window Help

STM32.Ioc - Pinout & Configuration

uration

Clock Configuration

Software Packs

GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIO I2C **RCC** SYS

Search Signals

Search (Ctrl+F)

☐ Show only Modified

Pin Na...	Signal on ...	GPIO outp...	GPIO mode	GPIO Pull...	Maximum ...	User Label	Mod
PD0-OS...	RCC_OS...	n/a	n/a	n/a	n/a		
PD1-OS...	RCC_OS...	n/a	n/a	n/a	n/a		

 Select Pins from table to configure them. Multiple selection is Allowed.



LEGIO

Group By Peripherals

GPIO I2C RCC SYS

Search Signals

Search (Ctrl+F)

☐ Show

Pin Na...	Signal on ...	GPIO outp...	GPIO mode	GPIO Pull...	Maximum ...	Use
PA1	n/a	Low	Output Pu...	No pull-up ...	Low	Moto
PA2	n/a	n/a	Input mode	No pull-up ...	n/a	
PA3	n/a	n/a	Input mode	No pull-up ...	n/a	
PA4	n/a	n/a	Input mode	No pull-up ...	n/a	


? Select Pins from table to configure them. **Multiple selection is Allowed.**

Project Manager

Pinout

Pinout view

System view

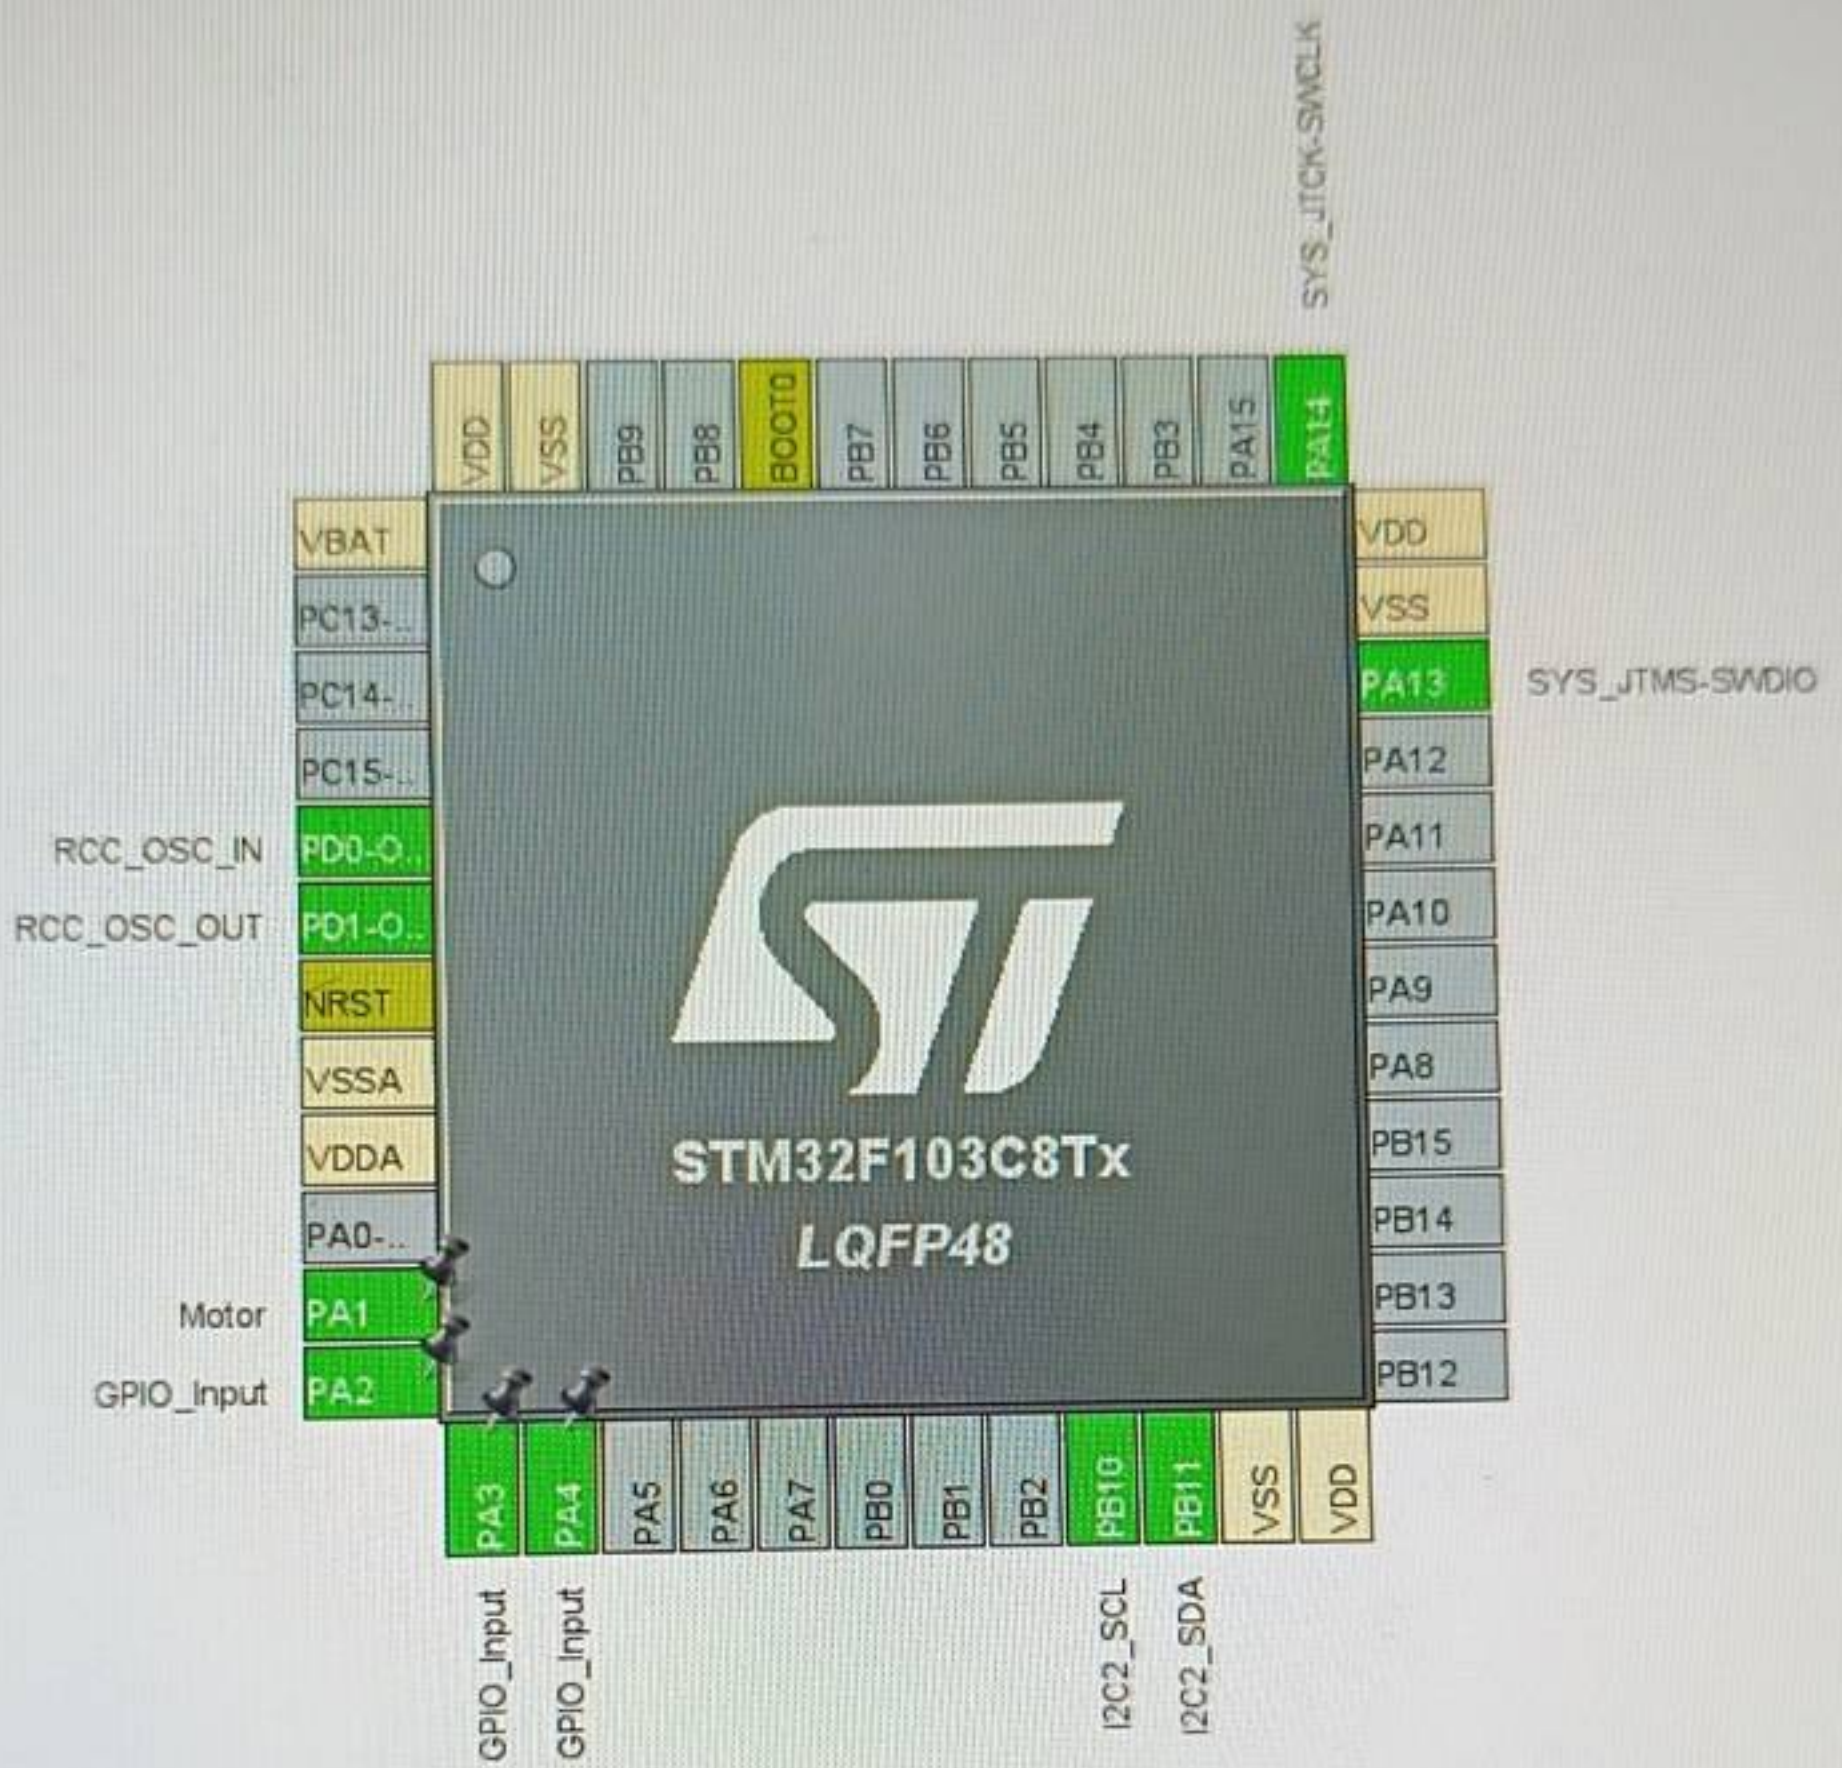

103C8Tx

File

Window

Help

STM32.Ioc - Pinout & Configuration

Configuration

Clock Configuration

Software Packs

GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIO

I2C

RCC

SYS

Search Signals

Search (Ctrl+F)

☐ Show only Mod

Pin Na...	Signal on ...	GPIO outp...	GPIO mode	GPIO Pull...	Maximum ...	User Label
PB10	I2C2_SCL	n/a	Alternate ...	n/a	High	
PB11	I2C2_SDA	n/a	Alternate ...	n/a	High	

? Select Pins from table to configure them. Multiple selection is Allowed.

MX

MX



I2C2 Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration

NVIC Settings

DMA Settings

GPIO Settings

Parameter Settings

User Constants

Configure the below parameters :

Search (Ctrl+F)



Master Features

I2C Speed Mode

Standard Mode

I2C Clock Speed (Hz)

100000

Slave Features

Clock No Stretch Mode

Disabled

Primary Address Length selection

7-bit

Dual Address Acknowledged

Disabled

Primary slave address

0

General Call address detection

Disabled

I2C2 Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration

NVIC Settings

DMA Settings

GPIO Settings

Parameter Settings

User Constants

Search Signals

Search (Ctrl+F)

☐ Show on

Pin Name	Signal on Pin	GPIO output I...	GPIO mode	GPIO Pull-up/...	Maximum out...	User Label
PB10	I2C2_SCL	n/a	Alternate Fun...	n/a	High	
PB11	I2C2_SDA	n/a	Alternate Fun...	n/a	High	