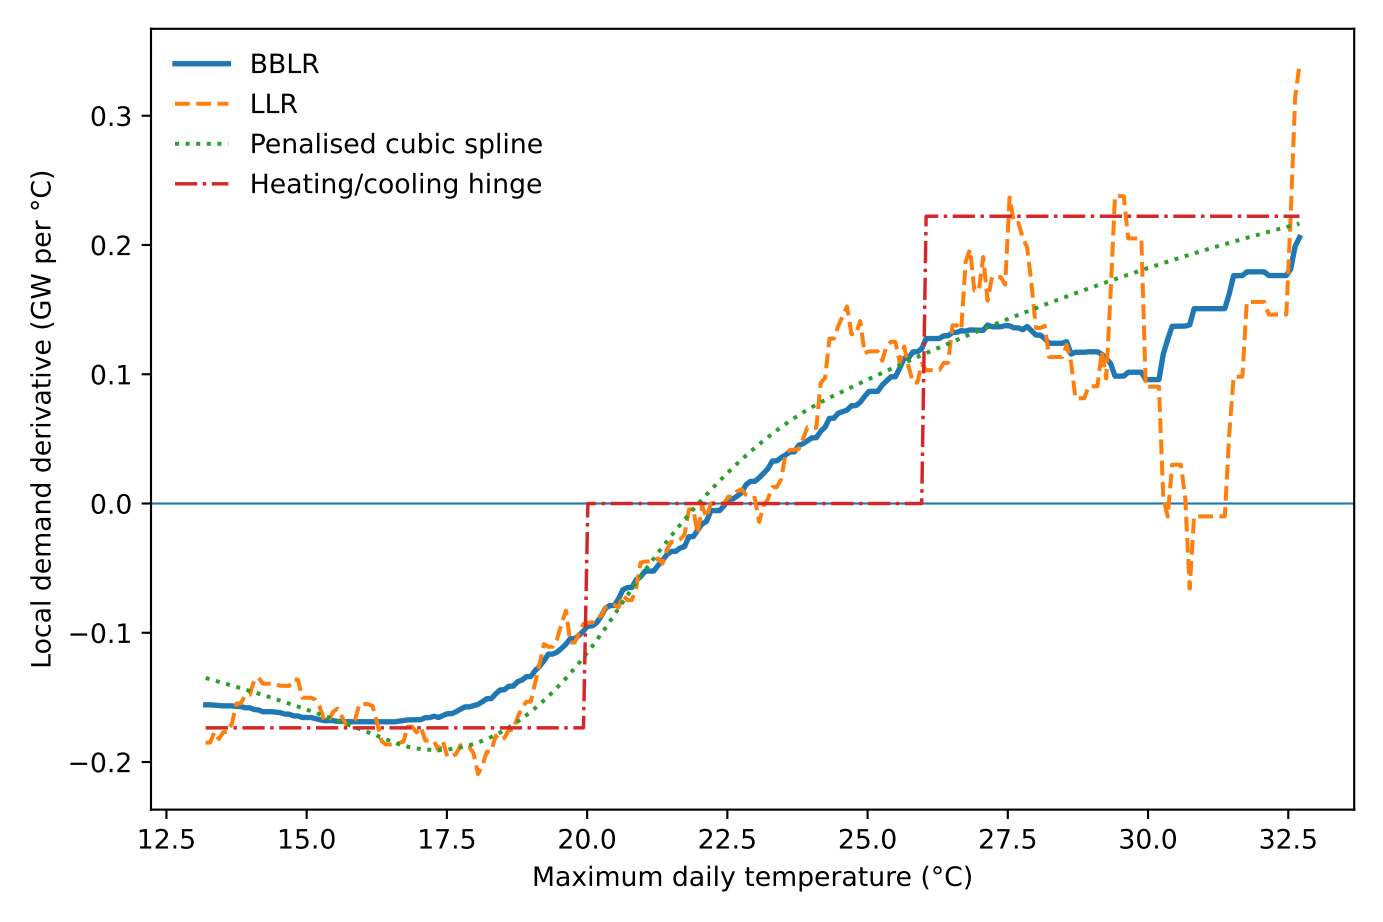
BBLR
LLR
Penalised cubic spline
Heating/cooling hinge
Local demand derivative (GW per °C)
0.3
0.2
0.1
0.0
−0.1
−0.2
12.5
15.0
17.5
20.0
22.5
25.0
27.5
30.0
32.5
Maximum daily temperature (°C)