EXPERIMENT - 11

Aim:

To design and configure a simple inter using a router in CISCO Packet tracer.

Procedure :-


* Open Cisco Packet tracer and Create a new topology.
* Add 2 routers, switches and 3-4 PCs for each network.
* Connect PCs to switches to routers usi ethernet cables
* Assign static IP address on router.
* Configure IP.

Code:

```
enable
configure terminal
interface fastethernet 0/0
ip address <IP> <Subnet Mask>
no shutdown
exit
interface FastEthernet 0/1
ip address <IP> <subnet mask>
no shutdown.
exit.
```

* Configuration default gateway of each PC with IP address of connected routers

* Use simulation mode and send a PDU from one network to another.
* Observe the packet path through the router and verify the successfully communication.

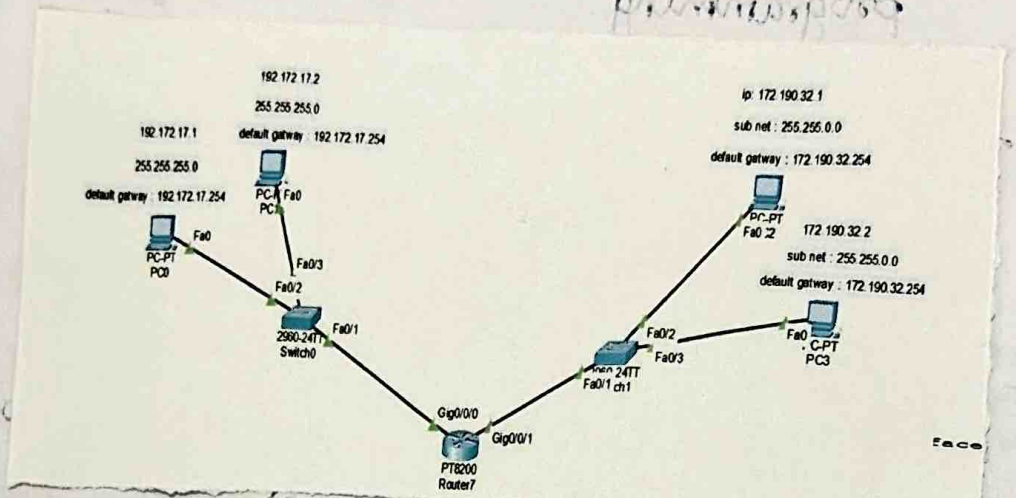


```
Router>
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#
Router(config)#interface GigabitEthernet0/0/0
Router(config-if)# ip address 192.172.17.254 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router(config)#
Router(config)#interface GigabitEthernet0/0/1
Router(config-if)# ip address 172.190.32.254 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router(config)#
Router(config)#
Router(config)#
Router(config)#
Router(config)#
Router(config)#
Router(config)#
```

Result: The simple subnetwork was successfully designed and configured on cisco Packet tracer.