EXPERIMENT-9

Aim:

Implementation of subnetting in Cisco Packet tracer simulator.

Creating a network topology:


To create a c network topology in packet trace, selecting "New" button in top, then select network and generic.

Adding the devices:

To add a device, select the device from the bottom left and drag it onto network topology.

Subnetting:

To subnet the network address of 192.168.01.0/24 to provide enough space for at least 5 address of end device, switch, router

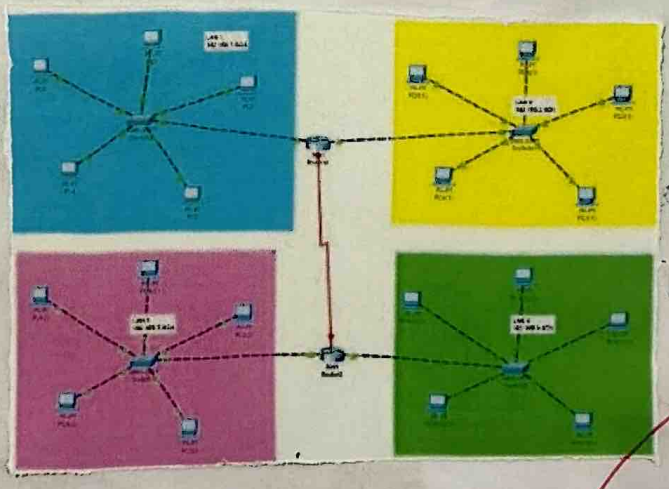

Configuration Devices :-

Right click on router and select "CLI".

Right click CLI and enter following commands.

#enable
Configure terminal
Interface fast Ethernet 0/0
ip address {ipaddress} {subnet mask}
no shut doun
exit

interface fast Ethent 0/1
ip address {ip address} {subnet mask}
no shutdown
exit

TESTING NETWORK :

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num
	Successful	PC4(2)	Router2	ICMP		0.000	N	12
	Successful	PC4(2)	PC2(1)(1)	ICMP		0.000	N	13
	Successful	PC0	Router0	ICMP		0.000	N	14

RESULT: The implementation of subnetting on cisco packet tracer simulator was executed successfully.