

virtspawn

Modern Libvirt Virtual Machine Manager

Web UI

REST API

Terminal TUI

Real-time Metrics


30+ libvirt Features

Built with Rust + React + TypeScript

Secure | Fast | Production-Ready

<https://github.com/ssahani/virtspawn>

Architecture

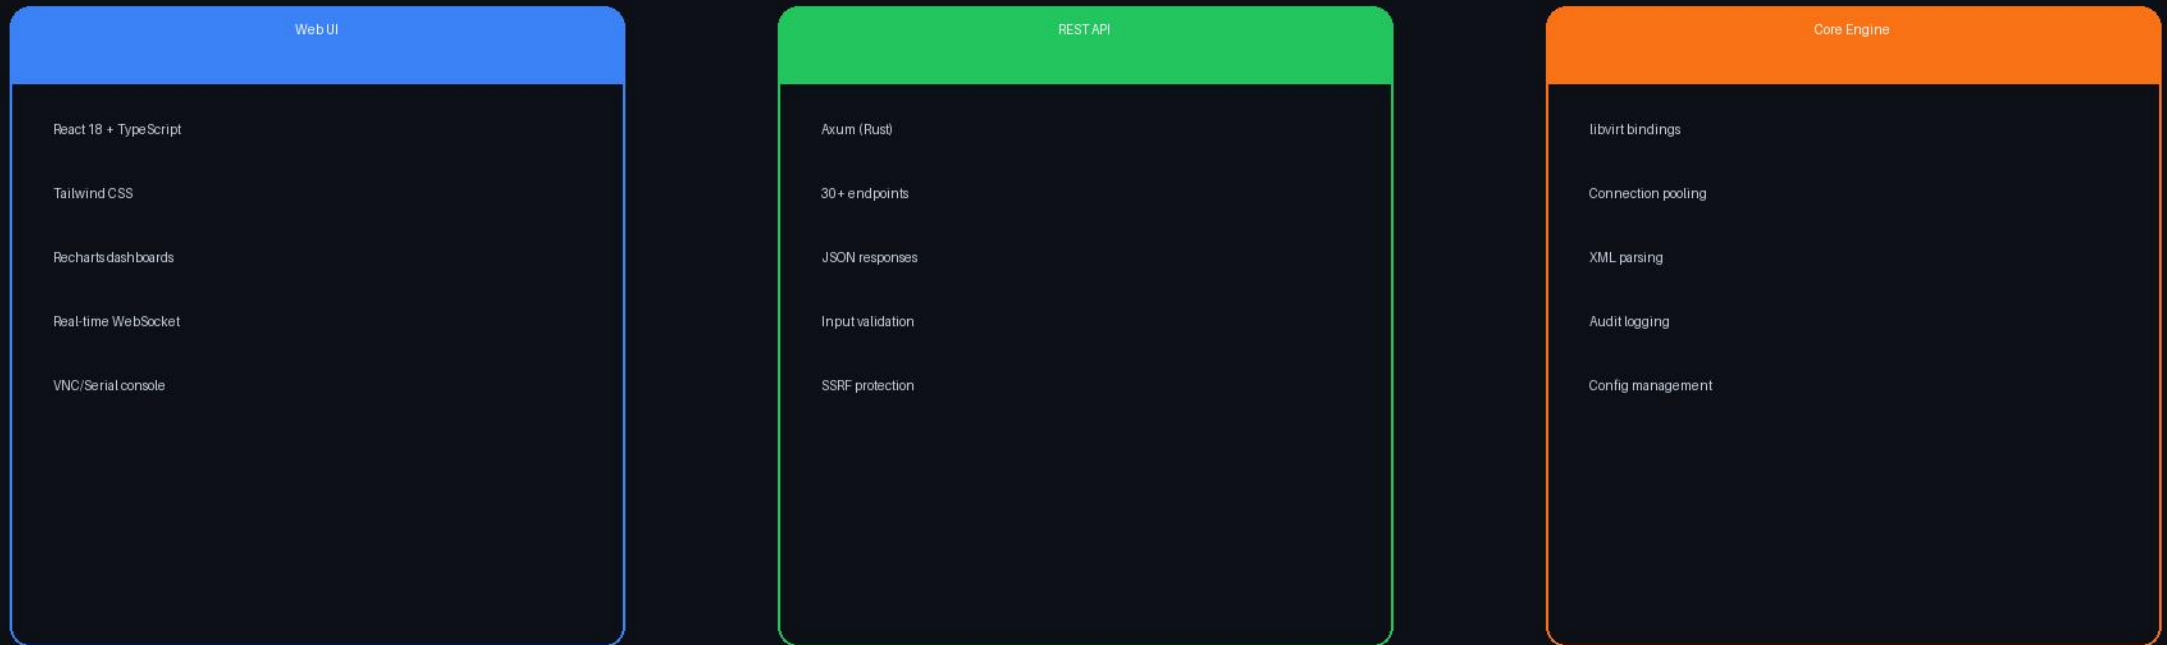

Single binary deployment | systemd service | < 10MB footprint

Dashboard

ssahani-thinkpadx1carbongen12.bengluru.csb — QEMU 10.1.4

 New VM



2 running

6

Virtual Machines



14c / 1t host

15

Total vCPUs



31 GB host

14.5 GB

Allocated Memory



1 active

1

Networks



Storage Pools

1/1



Running

2

4 stopped



Paused

0



Libvirt

v11.6.0



Virtual Machines

[View all](#) →

	fedora-test-hypersdk 4 vCPU · 4096 MB	running	>
	photon-os 2 vCPU · 2048 MB	shutoff	>
	ubuntu-test-hypersdk 4 vCPU · 4096 MB	shutoff	>

Virtual Machines



 Search VMs...

Name	State	vCPUs	Memory	Actions
fedora-test-hypersdk	running	4	4096 MB	    
photon-os	shutoff	2	2048 MB	 
ubuntu-test-hypersdk	shutoff	4	4096 MB	 
photon-os-20260322-125514	running	2	2048 MB	    
photon-test-vm	shutoff	2	2048 MB	 
demo-vm-334161	shutoff	1	512 MB	 



photon-os-20260322-125514

running ca67c469-6e10-4c08-b334-272504311f28

 Console

 Shutdown

 Reboot

 Stop

 Pause

 Save

 CD

 Eject

 Overview

 Disks (1)

 Network (1)

 Snapshots (0)

Configuration

vCPUs	2
Memory	2048 MB
OS Type	hvm
Architecture	x86_64
Persistent	Yes
Managed Save	No
Autostart	 Disabled

Boot Configuration

Boot Devices	None
Firmware	pflash
Secure Boot	No

Guest IP Addresses

192.168.122.8/24	52:54:00:1b:a1:84
ipv4	vnet2

Live Metrics

Memory Used	0 / 2048 MB (0.0%)
Disk Read	104.3 MB
Disk Write	9.2 MB
Net RX	76.9 KB
Net TX	5.6 KB

 Create Virtual Machine

 Templates

linux-small

1 vCPU · 1024 MB · 10 GB

linux-medium

2 vCPU · 4096 MB · 40 GB

linux-large

4 vCPU · 8192 MB · 80 GB

windows

4 vCPU · 8192 MB · 60 GB

minimal

1 vCPU · 512 MB · 5 GB

 Configuration

VM Name *

my-vm

vCPUs	Memory (MB)	Disk (GB)
2	2048	20

Network

default

ISO Path (optional)

/path/to/image.iso

Cancel

Create VM

Storage Pools

[+ Create Pool](#) 

 default

running

Capacity	475.3 GB
Used	312.3 GB
Available	163.0 GB

Browse

Networks



Name	Active	Bridge	Autostart	Actions
default	Active	virbr0		

 Capabilities



-  Capabilities
-  System Info

Host

Architecture	x86_64
CPU Model	Skylake-Client-v3

Guest Architectures

OS Type	Architecture	Machines
hvm	i686	pc-i440fx-10.1, pc, pc-q35-5.2, xenpv, pc-i440fx-6.2 (+42 more)
hvm	x86_64	pc-i440fx-10.1, pc, pc-q35-5.2, xenpv, pc-i440fx-6.2 (+42 more)

 Node Devices

All types ▾



Name	Capability	Driver	Parent	Actions
net_vnet0_fe_54_00_c7_6b_cc	net	-	computer	
pci_0000_00_07_2	pci	<name>pcieport</name>	computer	
net_lo_00_00_00_00_00_00	net	-	computer	
computer	system	-	-	
usb_3_9_1_0	usb	<name>uvcvideo</name>	usb_3_9	
drm_renderD128	drm	-	pci_0000_00_02_0	
usb_4_0_1_0	usb	<name>hub</name>	usb_usb4	
pci_0000_00_04_0	pci	<name>proc_thermal_pci</name>	computer	
pci_0000_00_00_0	pci	<name>igen6_edac</name>	computer	
usb_3_10	usb_device	<name>usb</name>	usb_usb3	
pci_0000_00_0d_2	pci	<name>thunderbolt</name>	computer	
pci_0000_00_07_0	pci	<name>pcieport</name>	computer	
pci_0000_00_14_0	pci	<name>xhci_hcd</name>	computer	
pci_0000_00_1f_4	pci	<name>i801_smbus</name>	computer	
usb_usb3	usb_device	<name>usb</name>	pci_0000_00_14_0	

 Network Filters (24)



 Search filters...

Name	UUID	Actions
allow-incoming-ipv4	allow-incoming-ipv4-00000000-0000-0000-0000-000000000000	 
allow-arp	allow-arp-00000000-0000-0000-0000-000000000000	 
no-mac-broadcast	no-mac-broadcast-00000000-0000-0000-0000-000000000000	 
allow-dhcpv6-server	allow-dhcpv6-server-00000000-0000-0000-0000-000000000000	 
no-ip-multicast	no-ip-multicast-00000000-0000-0000-0000-000000000000	 
no-arp-mac-spoofing	no-arp-mac-spoofing-00000000-0000-0000-0000-000000000000	 
allow-dhcp-server	allow-dhcp-server-00000000-0000-0000-0000-000000000000	 
no-arp-ip-spoofing	no-arp-ip-spoofing-00000000-0000-0000-0000-000000000000	 
no-ipv6-spoofing	no-ipv6-spoofing-00000000-0000-0000-0000-000000000000	 
clean-traffic-gateway	clean-traffic-gateway-00000000-0000-0000-0000-000000000000	 
allow-ipv4	allow-ipv4-00000000-0000-0000-0000-000000000000	 
no-arp-spoofing	no-arp-spoofing-00000000-0000-0000-0000-000000000000	 
no-mac-spoofing	no-mac-spoofing-00000000-0000-0000-0000-000000000000	 
no-other-rarp-traffic	no-other-rarp-traffic-00000000-0000-0000-0000-000000000000	 

 Console: photon-os-20260322-125514

VNC port 5900

 VNC Serial VNC — photon-os-20260322-125514 port 5900

Connected to QEMU (photon-os-20260322-125514)

Send Ctrl/Alt/Del

virtspawn

Ready for Production

make && sudo make deploy

Web UI at <http://localhost:8081>

TUI: virtspawn

Questions?