


● 訂貨方式HOW TO ORDER

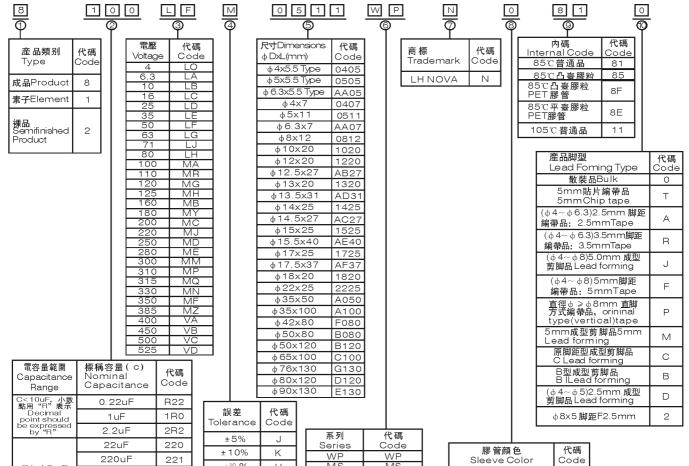

● 包裝PACKAGING BOXES AND CARTONS DIMENSIONS (mm)

222

223

224

12A

23A

27A

220uF

2200uF

22000uF

220000uF

125uF


235uF

275uF

C≥10uF.

特殊 Special

Cx10ⁿ

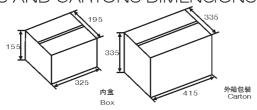

±290%

±20%

±39.%

±59.%

特殊 Special

V

М

Q

Т

Α

MS

詳見目録,代碼與系 列號相同

Code same with the

series, detailed reference catalaque

MS

● 包裝數量PACKAGING QUANTITY

鉛電解電容器

ALUMINUM ELECTROLYTIC CAPACITOR

■ WP 特性 FEATURE

* 壽命: 85℃ 2000小時 Load life:85℃ 2000 hours

* 適用于消費電子産品及工業電子産品 For general consumer and industrial electronic products application



• 特性表SPECIFICATIONS


項目Item				<u>±</u>	要特	性 Pe	rforr	mance	Chara	cteri	istics			
額定工作電壓範圍 Rated Voltage Range	6.3	8V.DC ~	100\	v.DC					160V.DC ~ 450V.DC					
使用温度範圍 Operating Temperature Range	-40℃~+85℃							-25℃+85℃						
標稱静電容量範圍 Nominal Capacitance Range	0.1 μ F ~ 22000 μ F							1μF~470μF						
静電容量允許偏差 Capaoitance Tolerance	± 20%(l						(M,+	,+20℃,120Hz)						
	額定工作電壓√ Rated working voltage 6.3~10							00			160 ~ 450			
漏電流 Leakage Current	施加額定電壓2分鐘: I <							plication of rated ≤0.01CV or 3 μ A			施加額定電壓2分鐘: I < 0.03CV μA 20℃After application o rated voltage for 2 minute I < 0.03CV μA 20℃			
	C: 標稱静電容量(μF); Nominal Capacitance in μF;							V:額定工作電壓 (V) Rated working Volta				- 、 ,		
坦拉在于IT(体/tops)	額定工作電壓(Rated working vol		6.3	10	\perp	16	25	35	50	6	3 100	160~450		
損耗角正切值(tan δ) Dissipation Factor	tanδ (MA) (20℃,120⊢	lź)	0.24	0.2		0.16	0. 1		0.10		10 0.08	0.15		
	標稱静電容量大于1000 μ F者,其標稱静電容量每增加1000 μ F,損耗角正切值增加0.02 When capacitanœ is over 1000 μ F, tanδ shall be added0.02 with increase of every 1000 μ F													
	額定工作電壓(V) Rated working volta		ge	6.3	10	16	25	35 50	63 10	00	160~25	0 350~450		
温度特性 Temperature Stability	阻抗比(120Hz) Impedance	Z-25℃ +20℃		4	3			2		3		5		
	Ratio	Z-40 +20		8	6	4	4	3	3					
高温負荷特性 Load Life	在+85℃環境中施加工作電壓和最大允許紋波電流2000小時后,電容器的性能符合下表要求: After application of rated working voltage and maximum permissible ripple current specified of +85℃ for 2000hours at +85℃ Capacitors meet the characteristics requirement listed below:									current				
Load Life	静電容量變 Capacitance	je	初始值的±20%以内 Within ±20% of the initial measured value											
	漏電流 Leakage Current Less thar						thar	不大于初期規定值 n the initial specified value						
	損耗角正切值 tan δ					不大于初期規定值的200% Less than 200% of the initial specified value								
高温貯存特性 Shelf Life	在+85℃環境中無負荷放置1000小時后,電容器的性能符合高温負荷特性中所列的規定值 After Leaving capacitor under no load at +85℃ for 1000 hours, Capacitors meet the characteristics listed above.													

- * 紋波倍乘因子MULTIPLIER FOR RIPPLE CURRENT
- * 頻率因子Frequency coefficient

Freq(Hz)	50(60)	100(120)	1K	≥10K
0.1~1.0	0.50	1.00	1.20	1.50
2.2~4.7	0.65	1.00	1.30	1.50
10~47	0.80	1.00	1.15	1.20
100~1000	0.80	1.00	1.10	1.15
1500~22000	0.80	1.00	1.00	1.15



● 外形圖及尺寸表 CASE SIZE TABLE

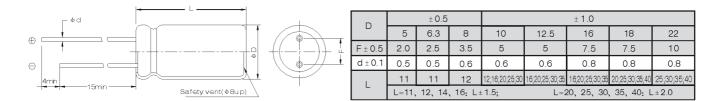

● WP尺寸、額定電壓及標稱容量 DIMENSIONS, RATED VOLTAGE AND CAPACITANCE

WV(V)	6.3(LA)	10(LB)	16(L	.C)	25(l	_D)	35	35(LE) 50(LF)			63(LG)		100(MA)	
CAP (UF)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)
0.1(R10)											5×11	1.1				
0.22(R22)											5×11	2.5				
0.33(R33)											5×11	4				
0.47(R47)											5×11	7			5×11	10
1(1R0)											5×11	13			5×11	21
2.2(2R2)											5×11	23			5×11	35
3.3(3R3)											5×11	35			5×11	45
4.7(4R7)											5×11	41			5×11	50
10(100)					5×11	39	5×11	44	5×11	53	5×11	60	5×11	70	(5 × 11) 6.3 × 11	60 75
22(220)					5×11	67	5×11	75	5×11	90	(5 × 11) 6.3 × 11	(95) 110	6.3 × 11	110	6.3 × 11 8 × 12	(110) 135
33(330)					5×11	88	5×11	98	5×11	110	6.3 × 11	140	6.3 × 11	140	8 × 12	185
47(470)			5×11	80	5×11	115	5 × 11 6.3x11	120	5×11	135	6.3×11 (8×12)	160 (170)	(6.3 × 11) 8 × 12	(190) 207	10×12	230
100(101)	5×11	135	5×11	140	(5 × 11) 6.3 × 11	(142) 175	(5 × 11) 6.3 × 11	(185) 215	6.3 × 11	215	8×12	270	(8 × 12) 10 × 12	(270) 290	10×20	380
150(151)						215	8 × 12	238	8 × 12	285	10 × 12	334	10×16	376	12.5 × 20	469
220(221)	5×11	220	(5 × 11) 6.3 × 11	(230) 280	6.3 × 11 (8 × 12)	280 (310)	(6.3 × 11) 8 × 12	(310) 360	8×12	370	(10 × 12) 10 × 16	(435) 500	(10×16) 10×20	(490) 590	12.5 × 25	629
330(331)	6.3 × 11	280	6.3 × 11	310	8X12	360	(8 × 12) 10 × 12	(410) 460	(10 × 12) 10 × 16	500 600	(10 × 16) 10 × 20	590 (550)	10 × 20 12.5 × 20	680 800	(12.5 × 25) 16 × 25	(760) 880
470(471)	63 × 11 8x12	360 400	(6.3 × 11) 8 × 12	(400) 450	8 × 12 (10 × 12)	460 (500)	10 × 12	550	10×16	680	(10 × 20) 125 × 20	(760) 800	12.5 × 20 12.5 × 25	810 880	(16 × 25) 16 × 30	(950) 950
680(681)	8 × 12	450	8x12 10 × 12	460 520	10×12	615	10 × 20	669	12.5 × 20	907	12.5 × 25	1038	16×25	1038	18 × 35	1038
1000(102)	8×12	590	8x12 10 × 12 (10 × 16)	610 660 750	10 × 16	800	10 × 20	970	12.5×20	1180	(12.5 × 25) 16 × 25	(1350) 1440	16×25	1350	18 × 40	1350
1500(152)	10 × 16	750	10 × 20	870	12.5 × 20	1015	12.5 × 20	1207	12.5×25	1392	16 × 25	1523	18×30	1769		
2200(222)	10 × 16	920	10 × 20	1090	12.5 × 20	1320	12.5 × 25	1570	16 × 25	1810	(18 × 25) 16 × 35	(1650) 2110	18×35	2300		
3300(332)	10 × 20	1200	12.5 × 20	1440	12.5 × 25	1670	16 × 25 16 × 30	2000	18X25 16 × 35	1850 2300	18 × 35	2540				
4700(472)	12.5 × 20	1550	125 × 25	1800	16 × 25 (16 × 30)	2120 (2250)	16X30 18X25	2440 2000	18 × 35	2740	22 × 40	2880				
6800(682)	12.5 × 25	1920	16 × 25	2250	16 × 30 18X25	2540 2150	18 × 35	2900								
10000(103)	16 × 25	2370	16×35	2710	16x35 18 × 35	2710 2950										
15000(153)	16 × 35	2880	18×35	3110												
22000(223)	18 × 40	3350														

→ 最大允許紋波電流 Max allowable ripple current (mA r.m.s./85℃ 120Hz)

→ 外形尺寸Case Size ΦD×L(mm)



\w\(\cdot\)	16	60(MB)	200	(MC)	250	(MD)	350	(MF)	400	(VA)	450(VB)	
Cap (uF)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)
1(1R0)							8 × 12	20	8×12	20	8 × 12	16
2.2(2R2)					8×12	36	8 × 12	31	(8 × 12) 10 × 12	(27) 31	(8 × 12) 10 × 12	(25) 29
3.3(3R3)					8 × 12	45	10 × 12	45	8x12 10 × 12	28 43	(10 × 12) 10 × 16	(40) 40
4.7(4R7)	8 × 12	50	8×12	51	8 × 12	54	8X12 10X12	40 48	8X12 10X12	40 47	10 × 16	46
6.8(6R8)	8 × 12	63	10 × 12	65	10×12	69	10 × 12	70	10X12 10 × 16	55 60	10 × 20	64
10(100)	(8 × 12) 10 × 12	(83) 90	(10 × 12) 10 × 16	(85) 96	10 × 16	90	10 × 20	100	(10 × 20) 12.5 × 20	(80) 90	12.5 ×20	84
15(150)	10 × 16	102	10×16	103	10×20	110	12.5 × 20	142	12.5 × 20	128	12.5 × 25	107
22(220)	10 × 16	133	10×20	135	10 × 20	130	(12.5 × 20) 12.5 × 25	(145) 185	12.5x20 12.5 × 25	150 180	12.5 × 25	110
33(330)	10 × 20	180	12.5 × 20	205	12.5 × 20	205	16 × 25	230	16 × 25	230	(16 × 25) 16 × 30	(180) 180
47(470)	12.5 × 20	230	12.5 × 20	230	(12.5 × 20) 12.5 × 25	(235) 260	(16 × 25) 16 × 30	(250) 280	16 × 25 (16X30)	260 (280)	(16 × 30) 18x30	(200) 220
68(680)	12.5 × 25	296	12.5 × 25	307	16 × 25	330	18 × 30	340	16 × 30 18x25	350 400	18x30	270
100(101)	12.5 × 25 (16 × 25)	385 (410)	16 × 25	400	16 × 30	450	18x25 18 × 40	350 420	18 × 40	420		
150(151)	16 × 30	496	18 × 25	496	18x25	550						
220(221)	16 × 35 18x25	645 700	18 × 30	680								
330(331)	18 × 35	760	18 × 35	760								
470(471)	18 × 40	780	22 × 40	810								

→ 最大允許紋波電流 Max allowable ripple current (mA r.m.s./85℃ 120Hz)

→ 外形尺寸Case Size ΦD×L(mm)