



— without wiring — with wiring

(a) supply current of one read

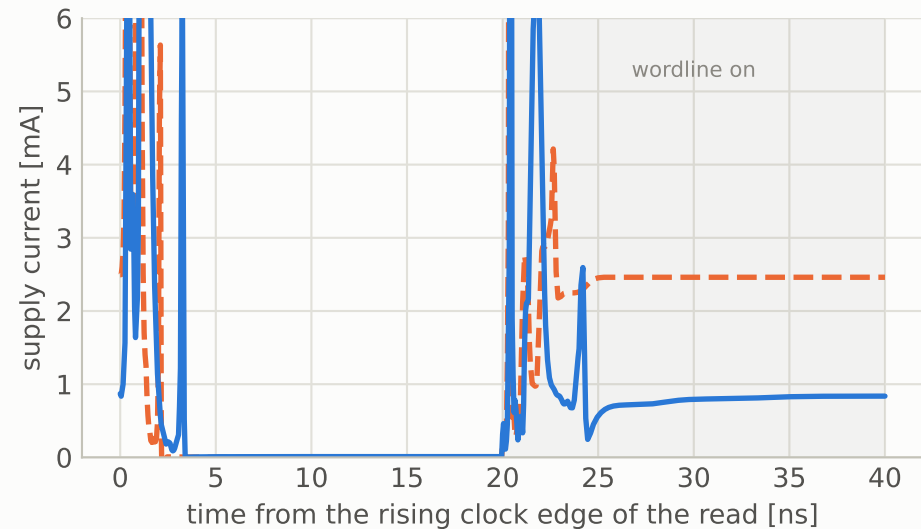

(b) the bitline that should stay high

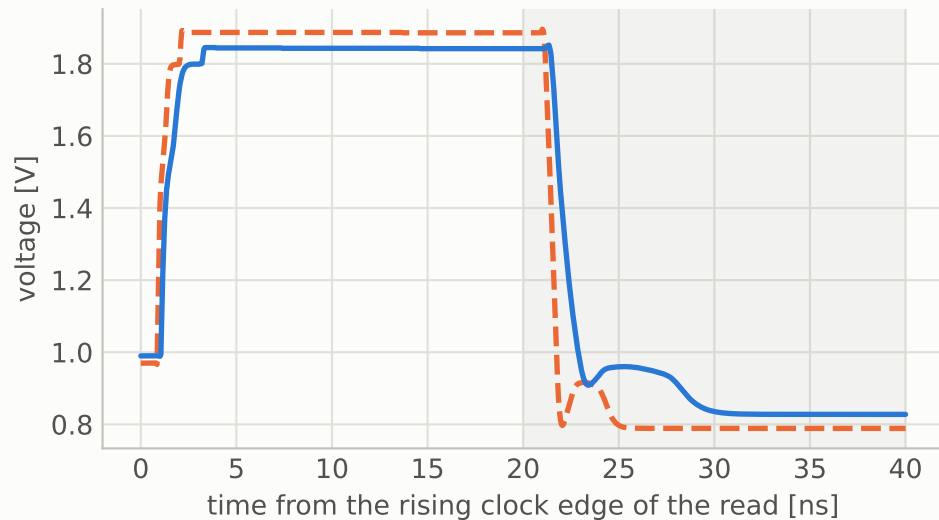

24 × 128 macro, flat layout extraction with and without its parasitic capacitors; typical corner, 25 MHz