Two lanes on the macro store: 93% less latency and 72% less energy per forward NTT, at a larger area

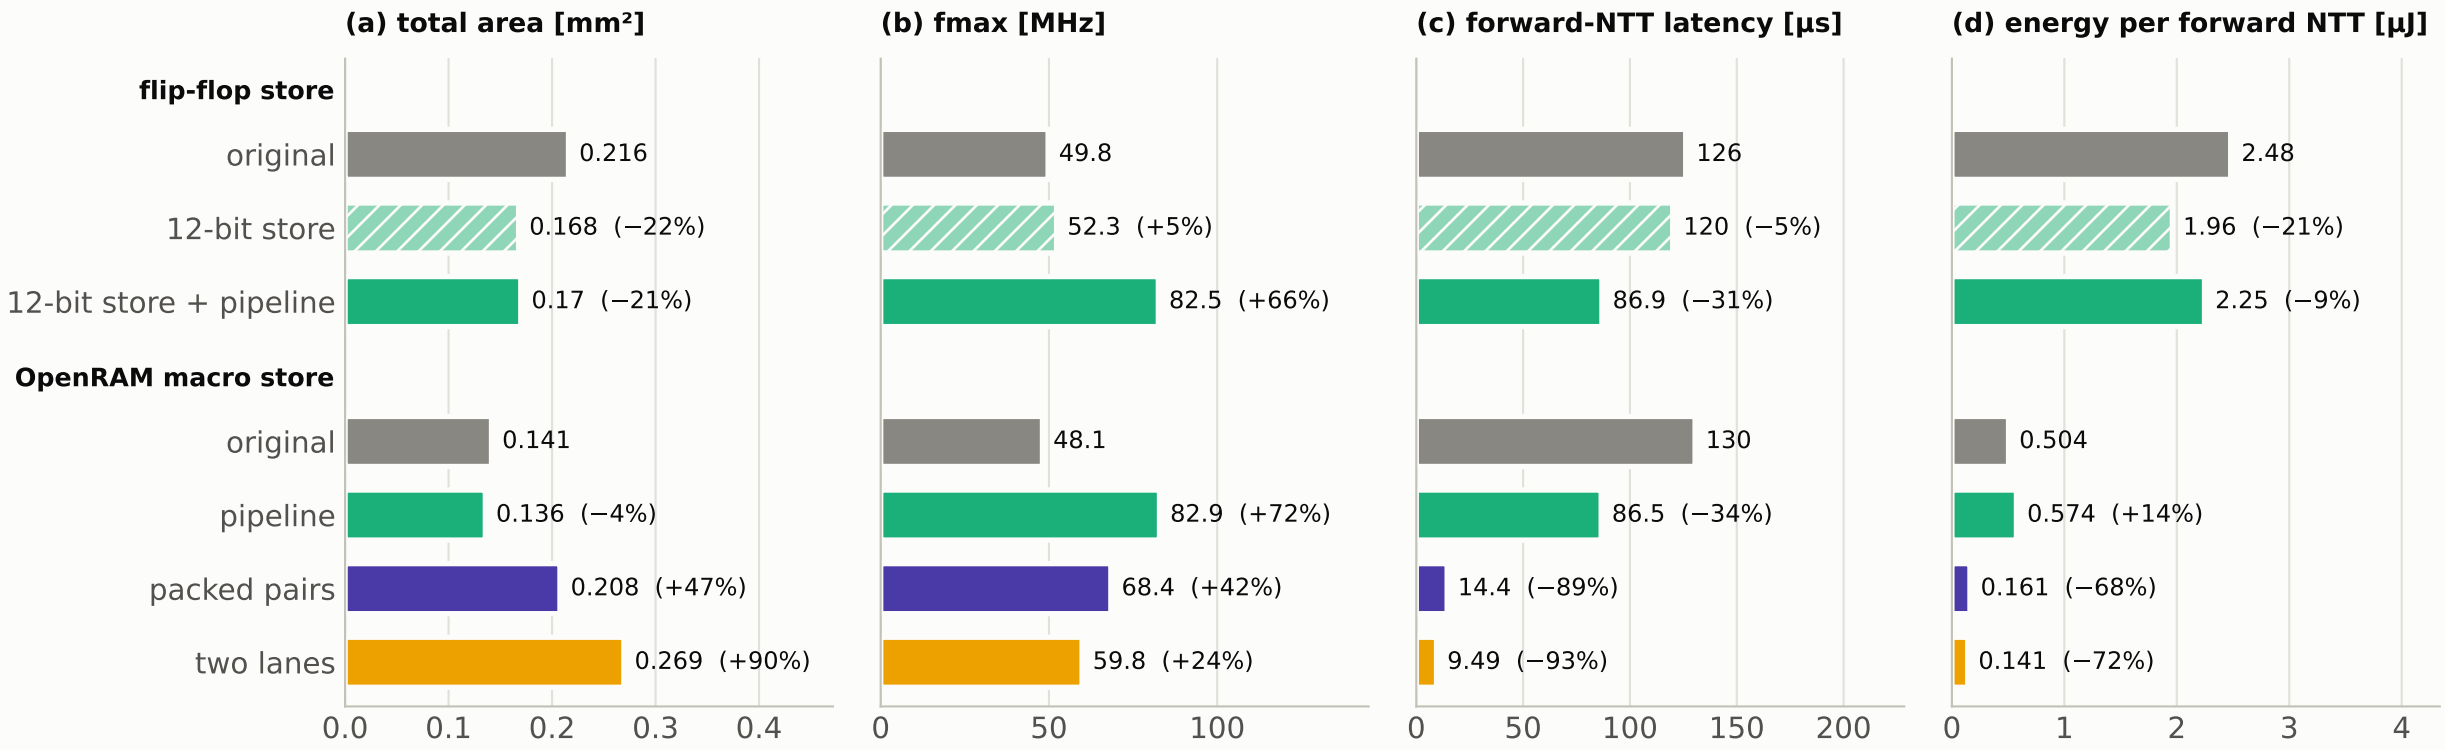

Data: results/dse_metrics.csv and results/gls_power/<design point>_20ns/summary.json (gate-level energy); routed at 20 ns; grey: the original engine, hatched: an intermediate step