


SPECIFICATION SHEET

HEAVY DUTY SILT FENCE GEOTEXTILE WITH GEO MESH OPSD 219.130

POSTS: 1.5" x 1.5" x 60" High,
POST SPACING: 2m
INSTALL: As per contract

CONTROL MEASURE: 33" Polypropylene geo mesh

MD Tensile Strength 68.5 lbs/ft
TD Tensile Strength 54.8 lbs/ft

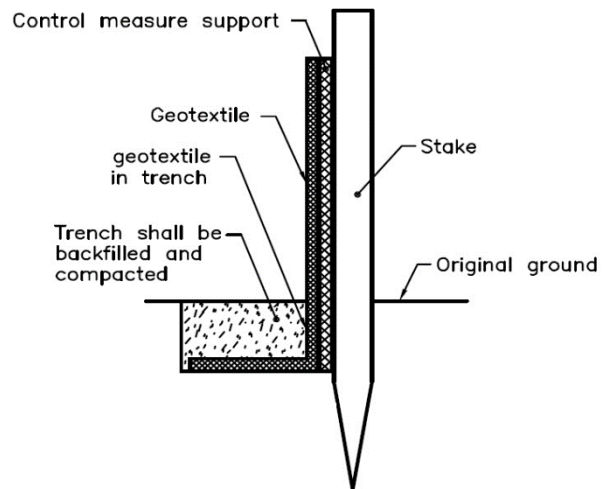

GEOTEXTILE: 36" Black Woven Geotextile

PROPERTY	TEST METHOD	MARV English	MARV Metric
Tensile Strength (Grab)	ASTM D4632	100 x 100 lbs	445 x 445 N
Elongation (Grab)	ASTM D4632	15% x 15%	15% x 15%
Trapezoidal Tear Strength	ASTM D4533	50 x 50 lbs	322.4 x 322.4 N
CBR Puncture	ASTM D6241	250lbs	1112.5 N
UV Resistance (500 hrs)	ASTM D4355	80%	80%
Apparent Opening Size*	ASTM D4751	30 US Std. Sieve	0.60 mm
Filtration Opening Size (FOS)	CAN/CGSB 148.1		190 um
Permittivity	ASTM D4491	0.1 sec ⁻¹	0.1 sec ⁻¹
Water Flow Rate	ASTM D-4491	8 gpm/ft ²	326 lpm/m ²

*Maximum Average Roll Value

- Filtration Opening Size (FOS) tested by CTT Group.

Fabric and Control measure are rolled together at the time of manufacture. The control measure is not bonded to the fabric.

The information provided is for reference purposes only and is not intended as a warranty or guarantee whether implied or inferred. This document should not be construed as engineering advice. Always consult the project engineer for project specific requirements. The property values listed above are subject to change without notice. BW Geotextiles assumes no liability in connection with the use of this information and product.

1239 Notre Dame Drive, Box 178
Petersburg, ON N0B 2H0
Phone: (519)778-1953 Toll Free: 1-844-778-1953
www.bwgeotextiles.com

02/11/2020