


Managed Storage @ GRID

or

why NFSv4.1 is not enough

Tigran Mkrtchyan
for dCache Team

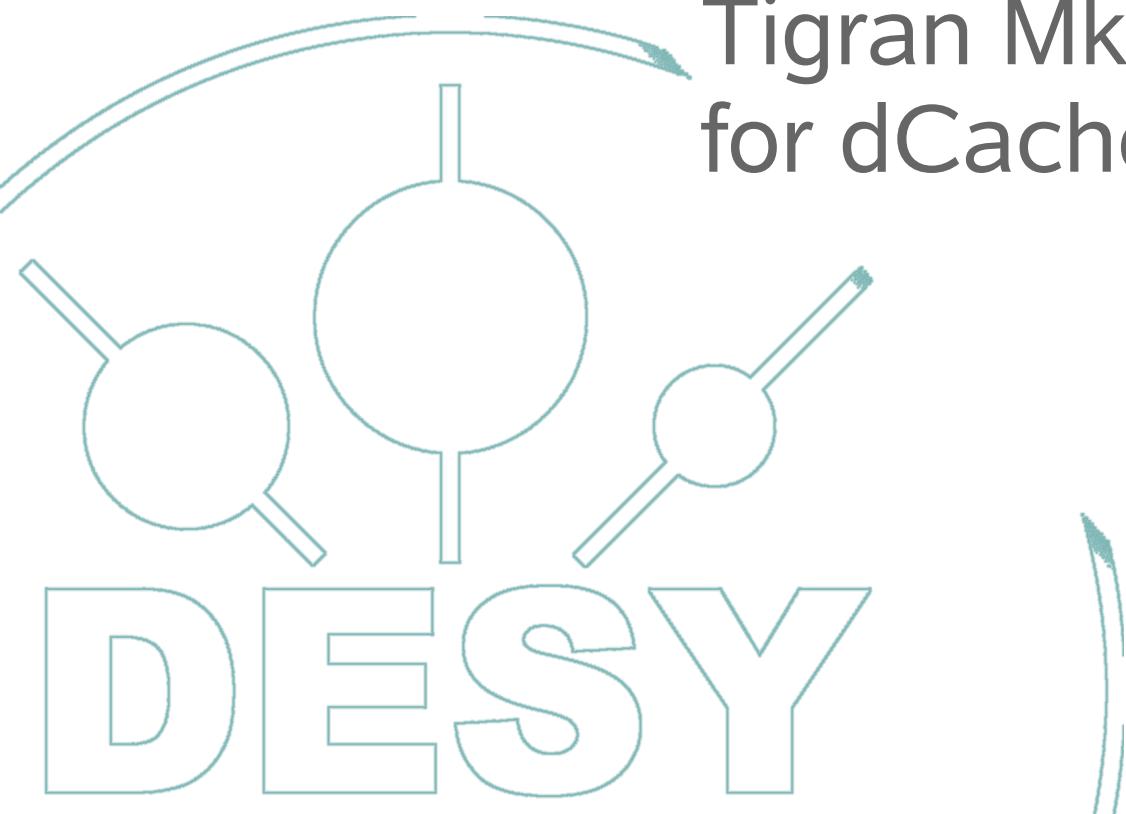

What the hell do physicists do?

- Physicist are **hackers** – they just want to know how things works.
- In modern physics given cause does not produce same effect.
- Statistic is used to describe behavior.
- Physics data is IMMUTABLE : *you keep it forever or you removed it, but you never FIX it!*


DESY

Right tool for right job

Large Hadron Collider:


Expected start July 2008
800 million collisions per second
(25 km long)
Data rate ~ 1.5 GB per second
 ~ 15 PB per year

DESY

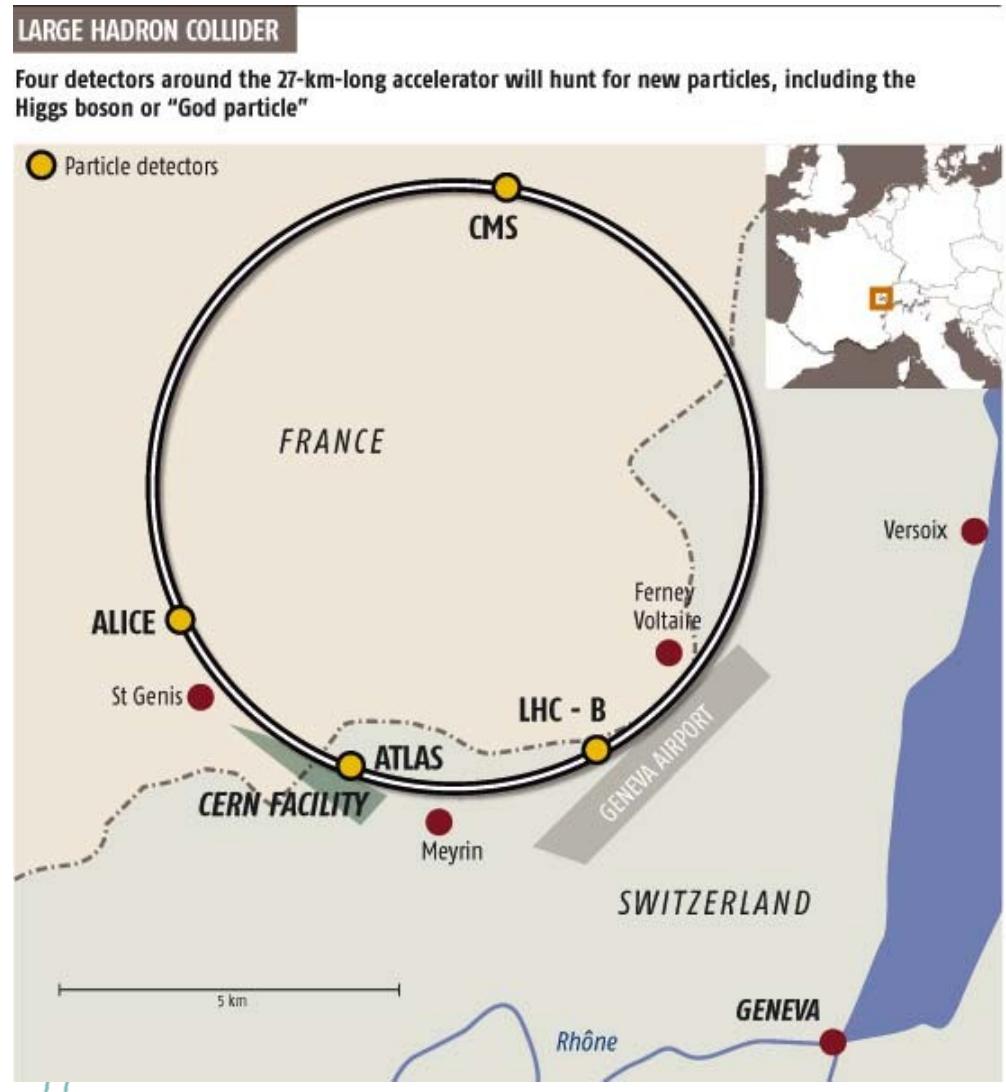

Multiple tier model

Tier Structure

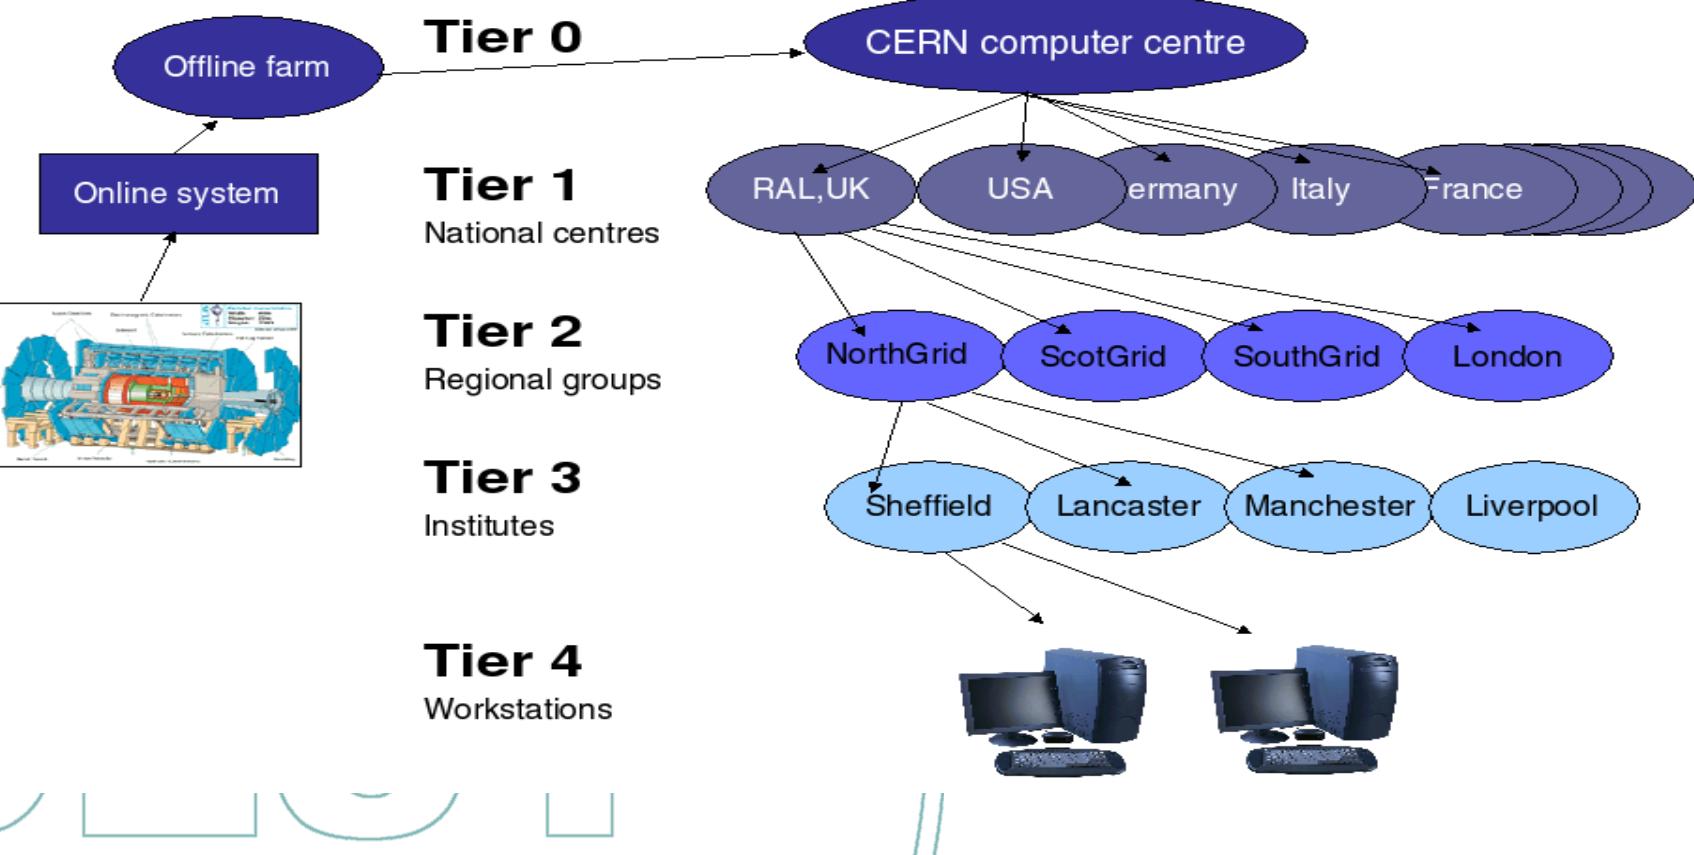


GRID as core infrastructure

GRID middleware applied to solve two major goals:

- Physical
 - space, power, cooling, connectivity
- Political
 - let regional investors to spend many for regional centers




What is a GRID ?

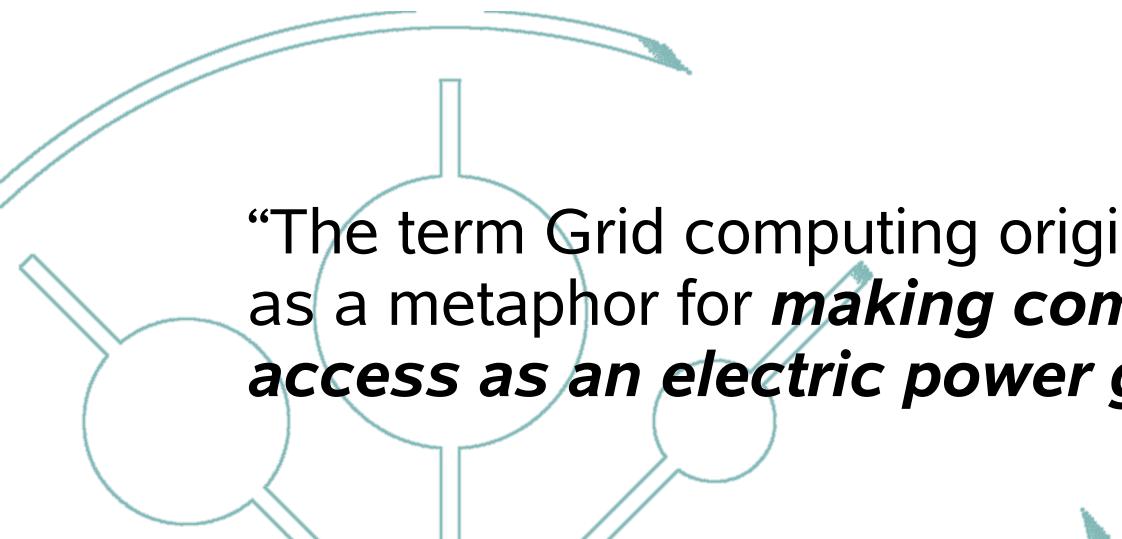


“The term Grid computing originated in the early 1990s as a metaphor for ***making computer power as easy to access as an electric power grid.***”



What is a GRID ?

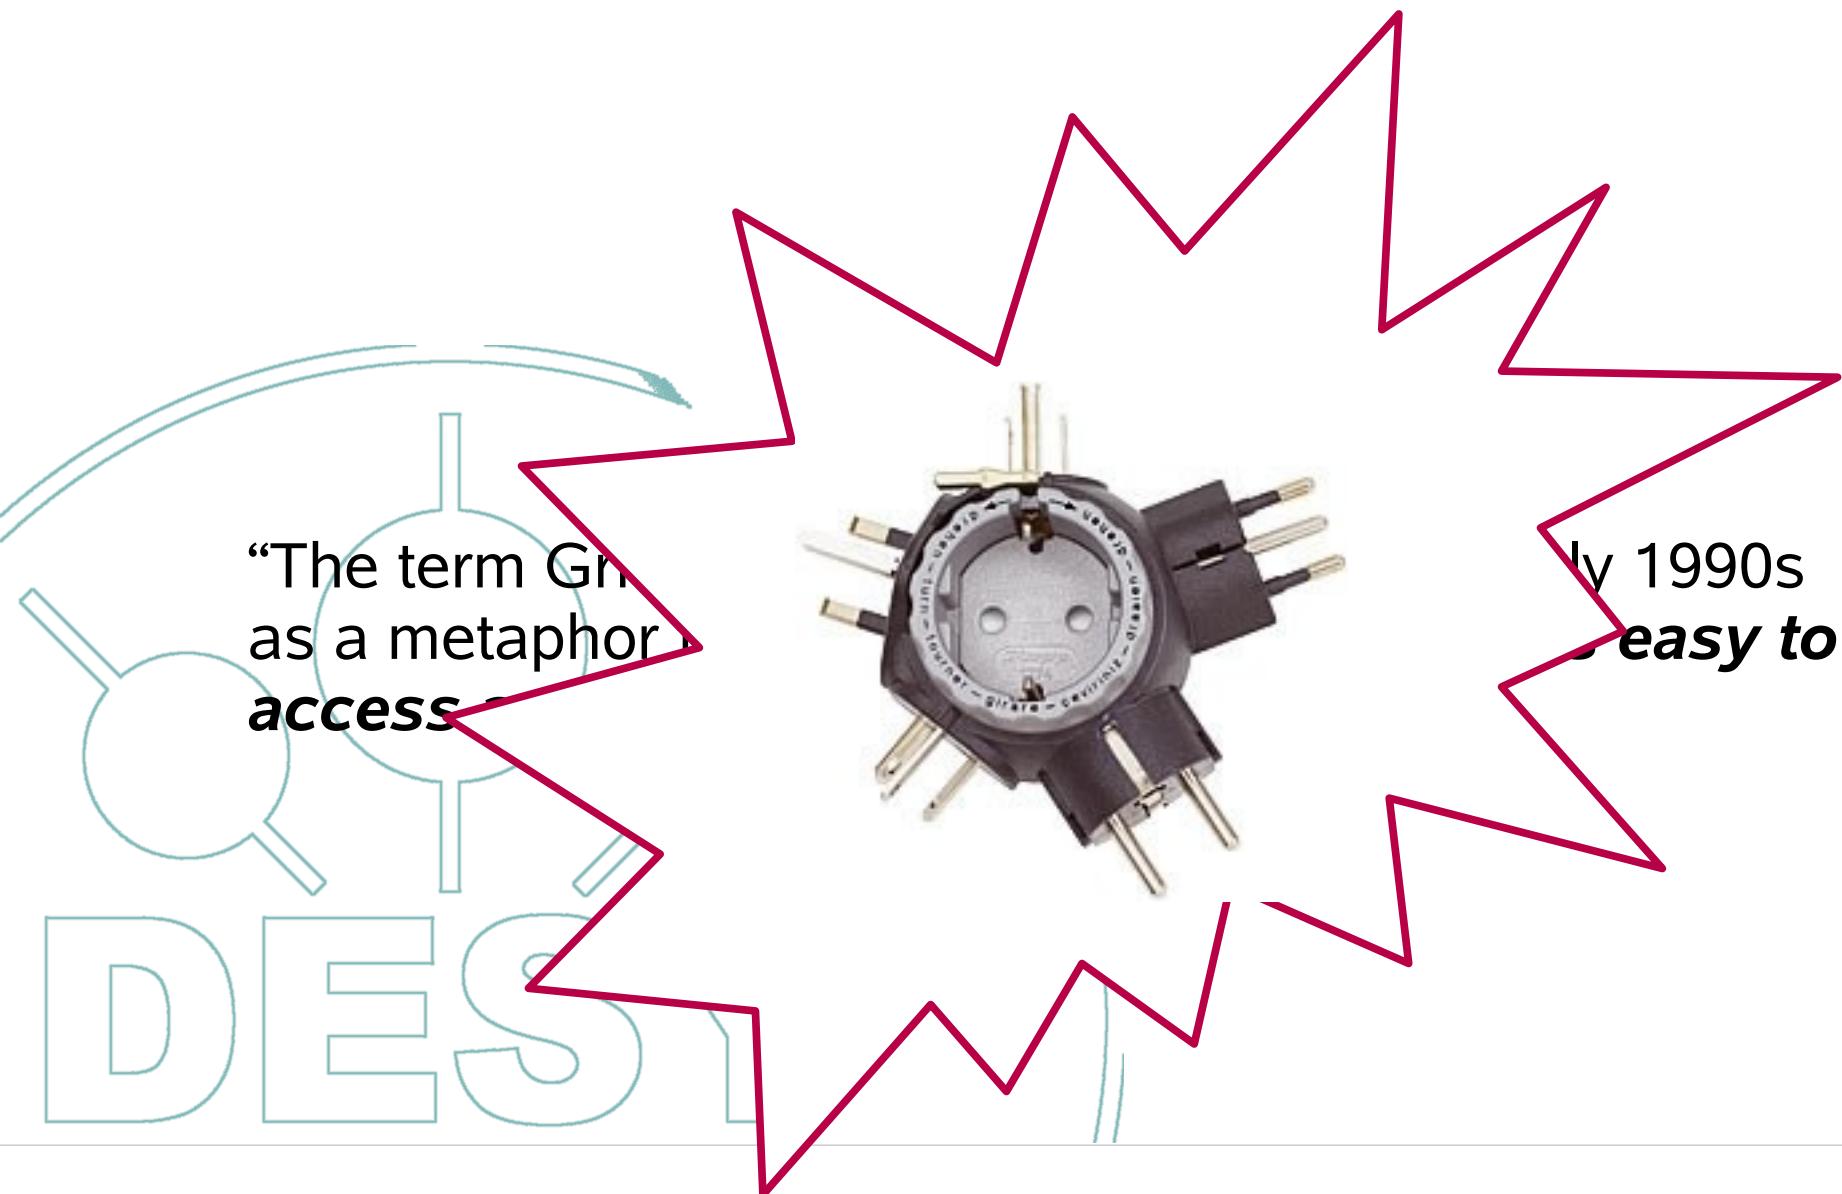


What is a GRID ?

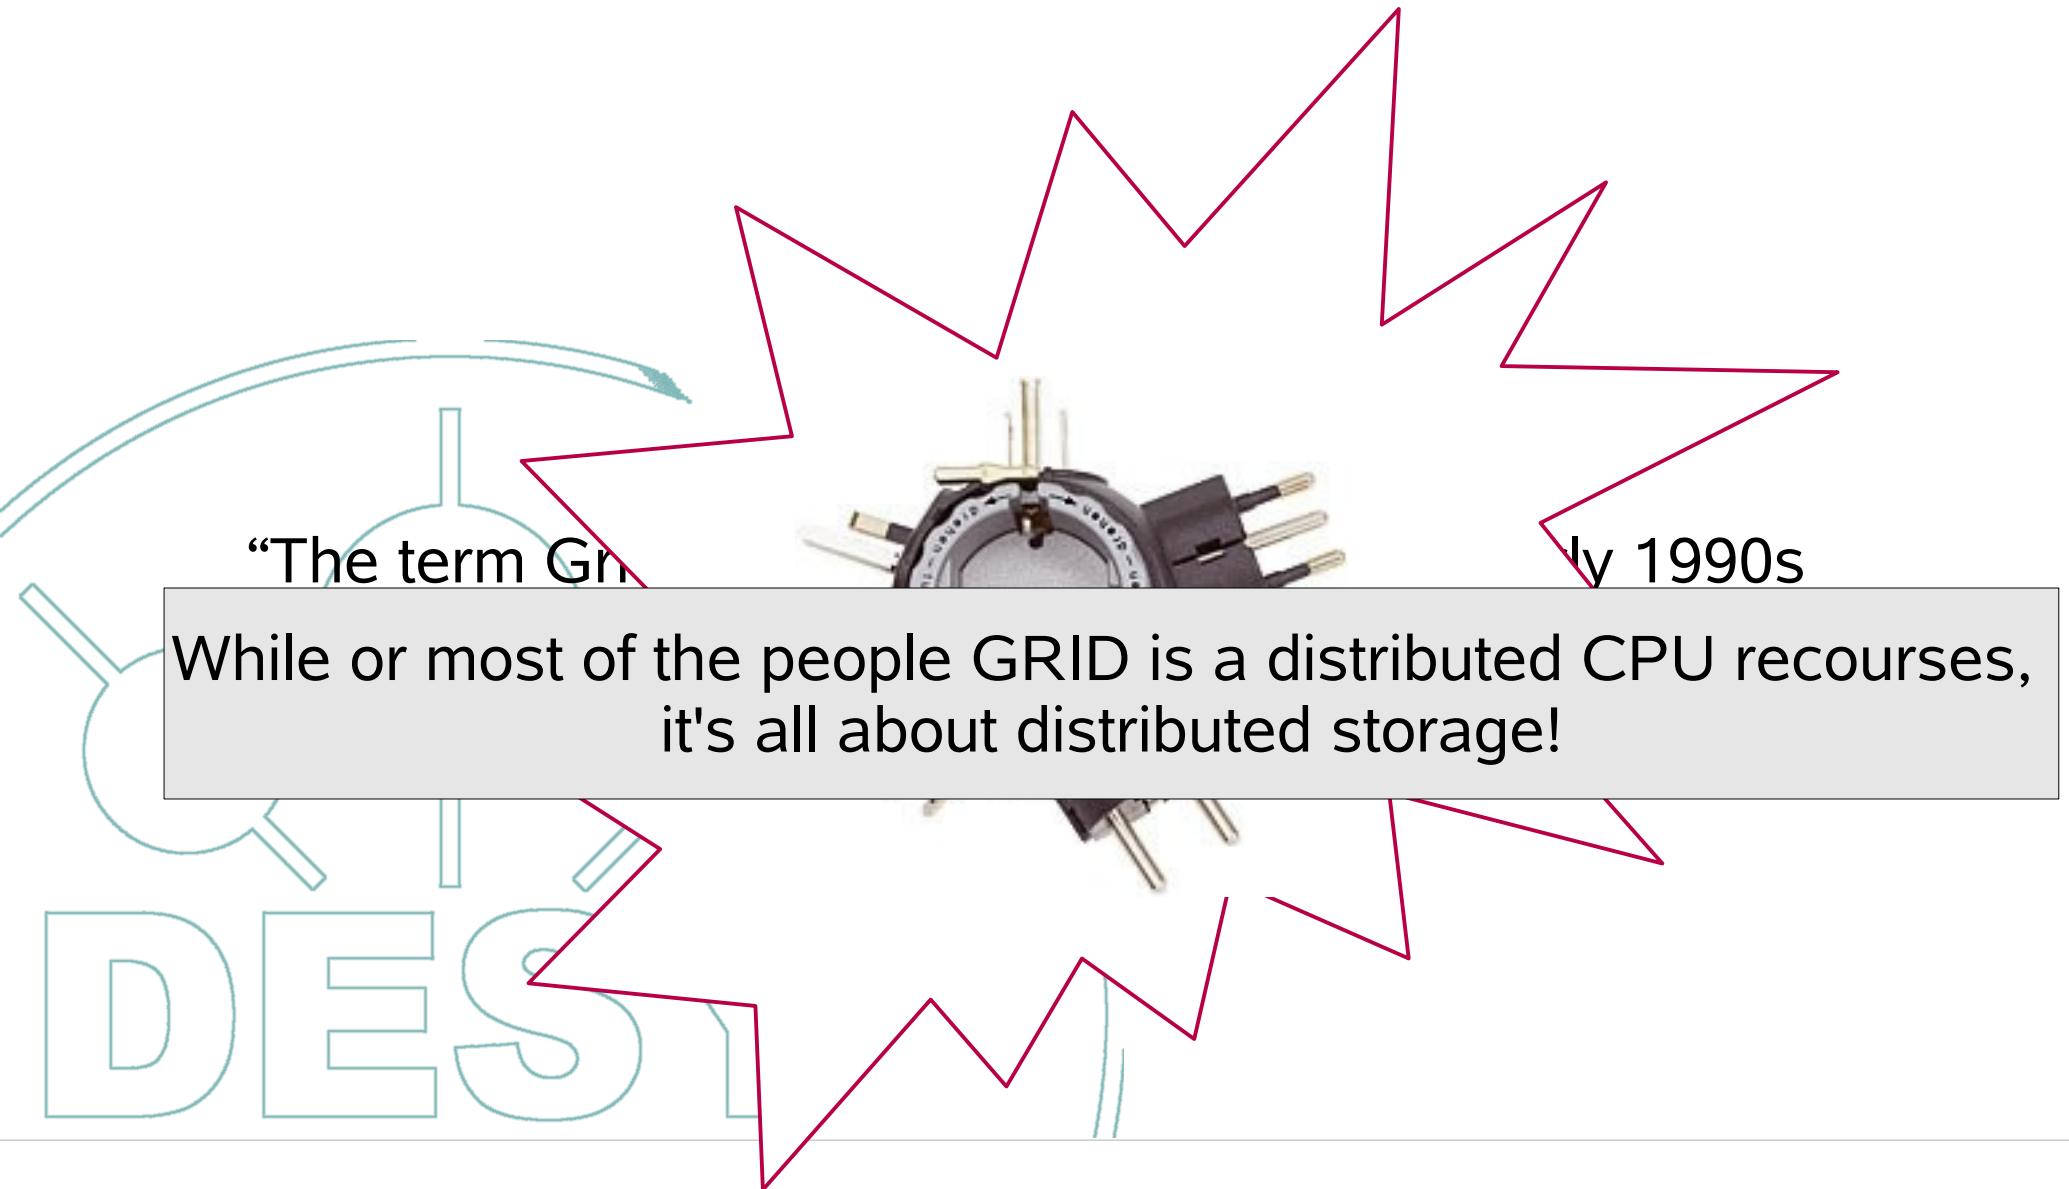

Storage Resource Manager

To hide storage system implementation a top level management interface was defined - SRM.

SRM together with '***Information Provider***', which allows to query storage system called '***Storage Element (SE)***'

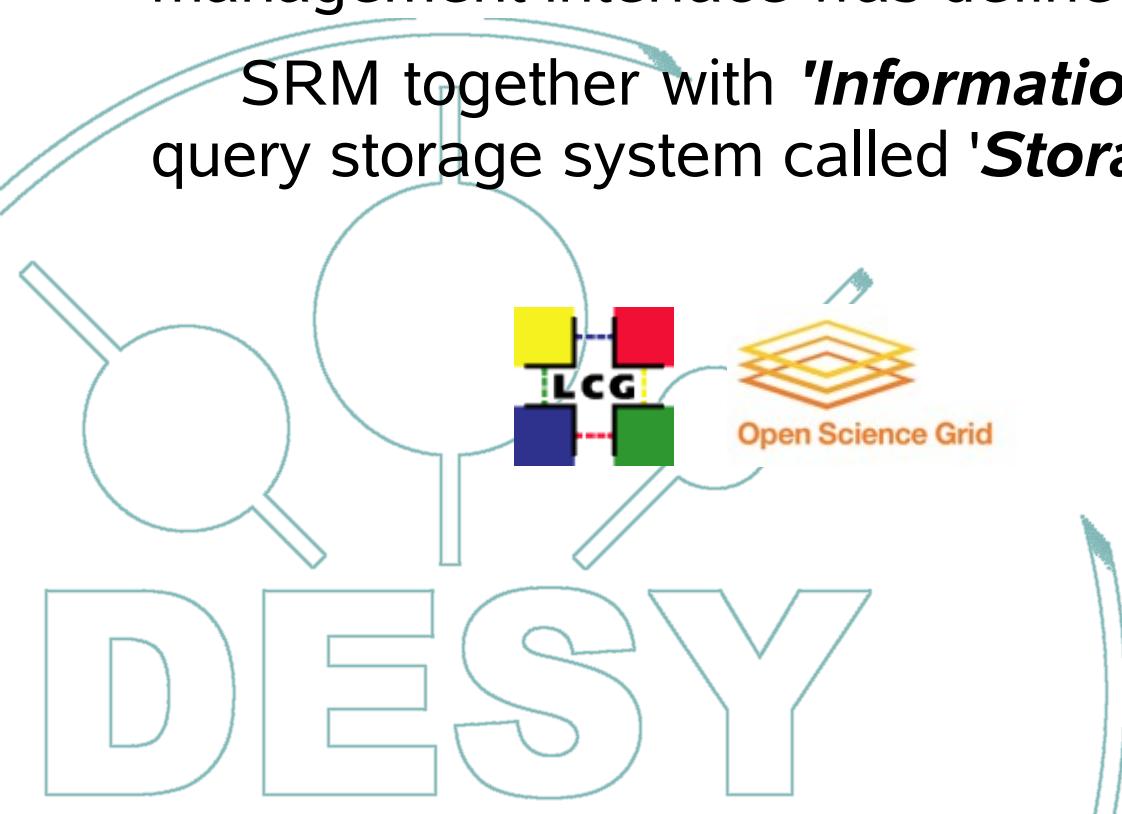

Storage Resource Manager

Storage Resource Managers (SRMs) are middleware components whose function is to provide dynamic space allocation and file management on shared storage components on the Grid.

SRM interface defines following functions:

- Data Transfer
- File Pining/UnPining
- Space Management
- Request Status queries
- Directory operations
- Permission management

SRM Data Transfer


SRM data transfer based on two concepts: SURL and TURL.

- SURL - is a “site URL” which consists of “srm://host.at.site/<path>”.
- TURL - is the “transfer URL” that an SRM returns to a client for the client to “get” or “put” a file in that location. It consists of “protocol://TFN”, where the protocol must be a specific transfer protocol selected by SRM from the list of protocols provided by the client .


SRM behaves as a load balancer and redirector

de facto, GSI enabled FTP protocol is used for transfers


SRM PUT (ftp)

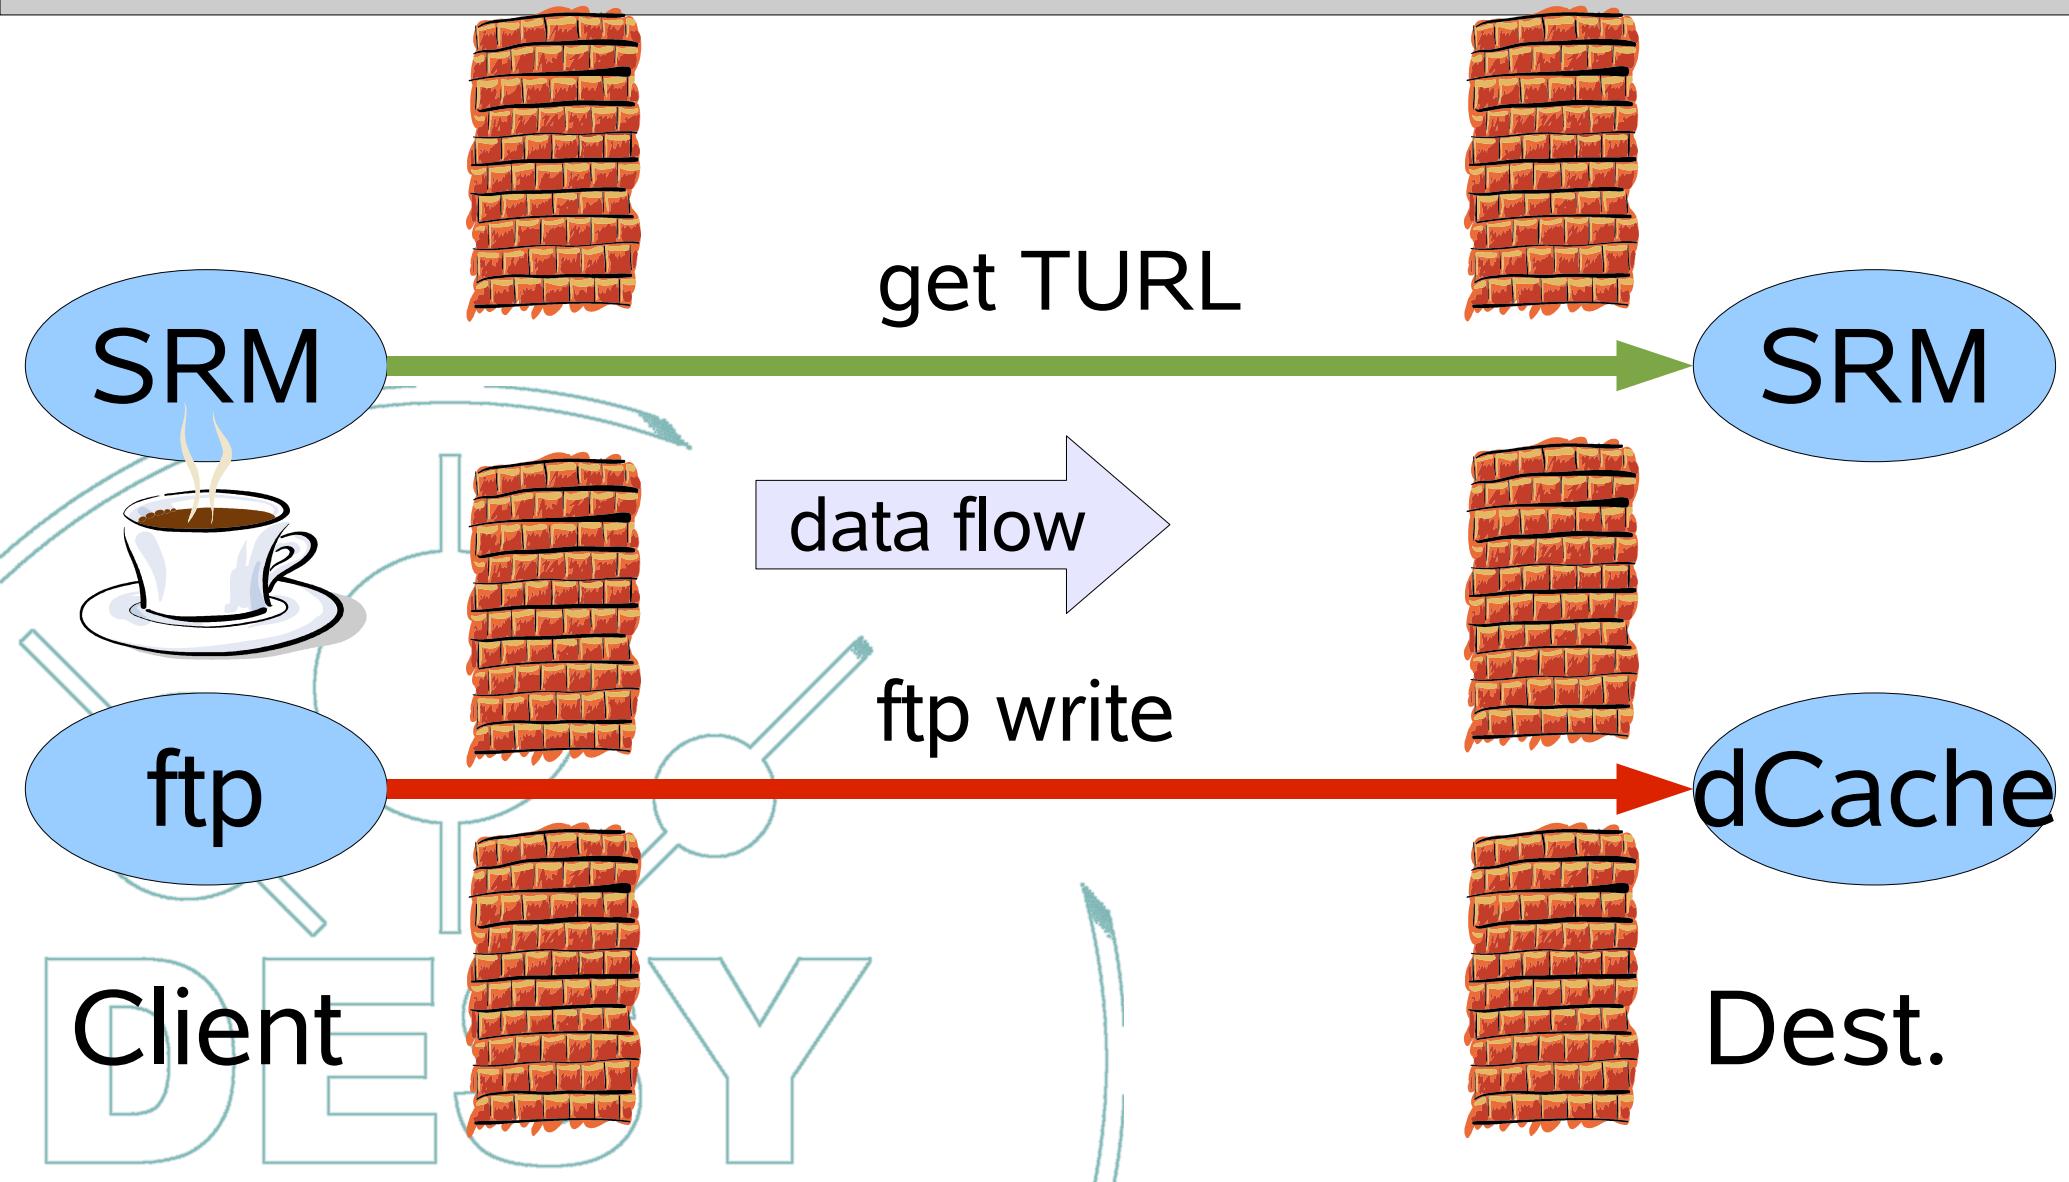


SRM GET (ftp)

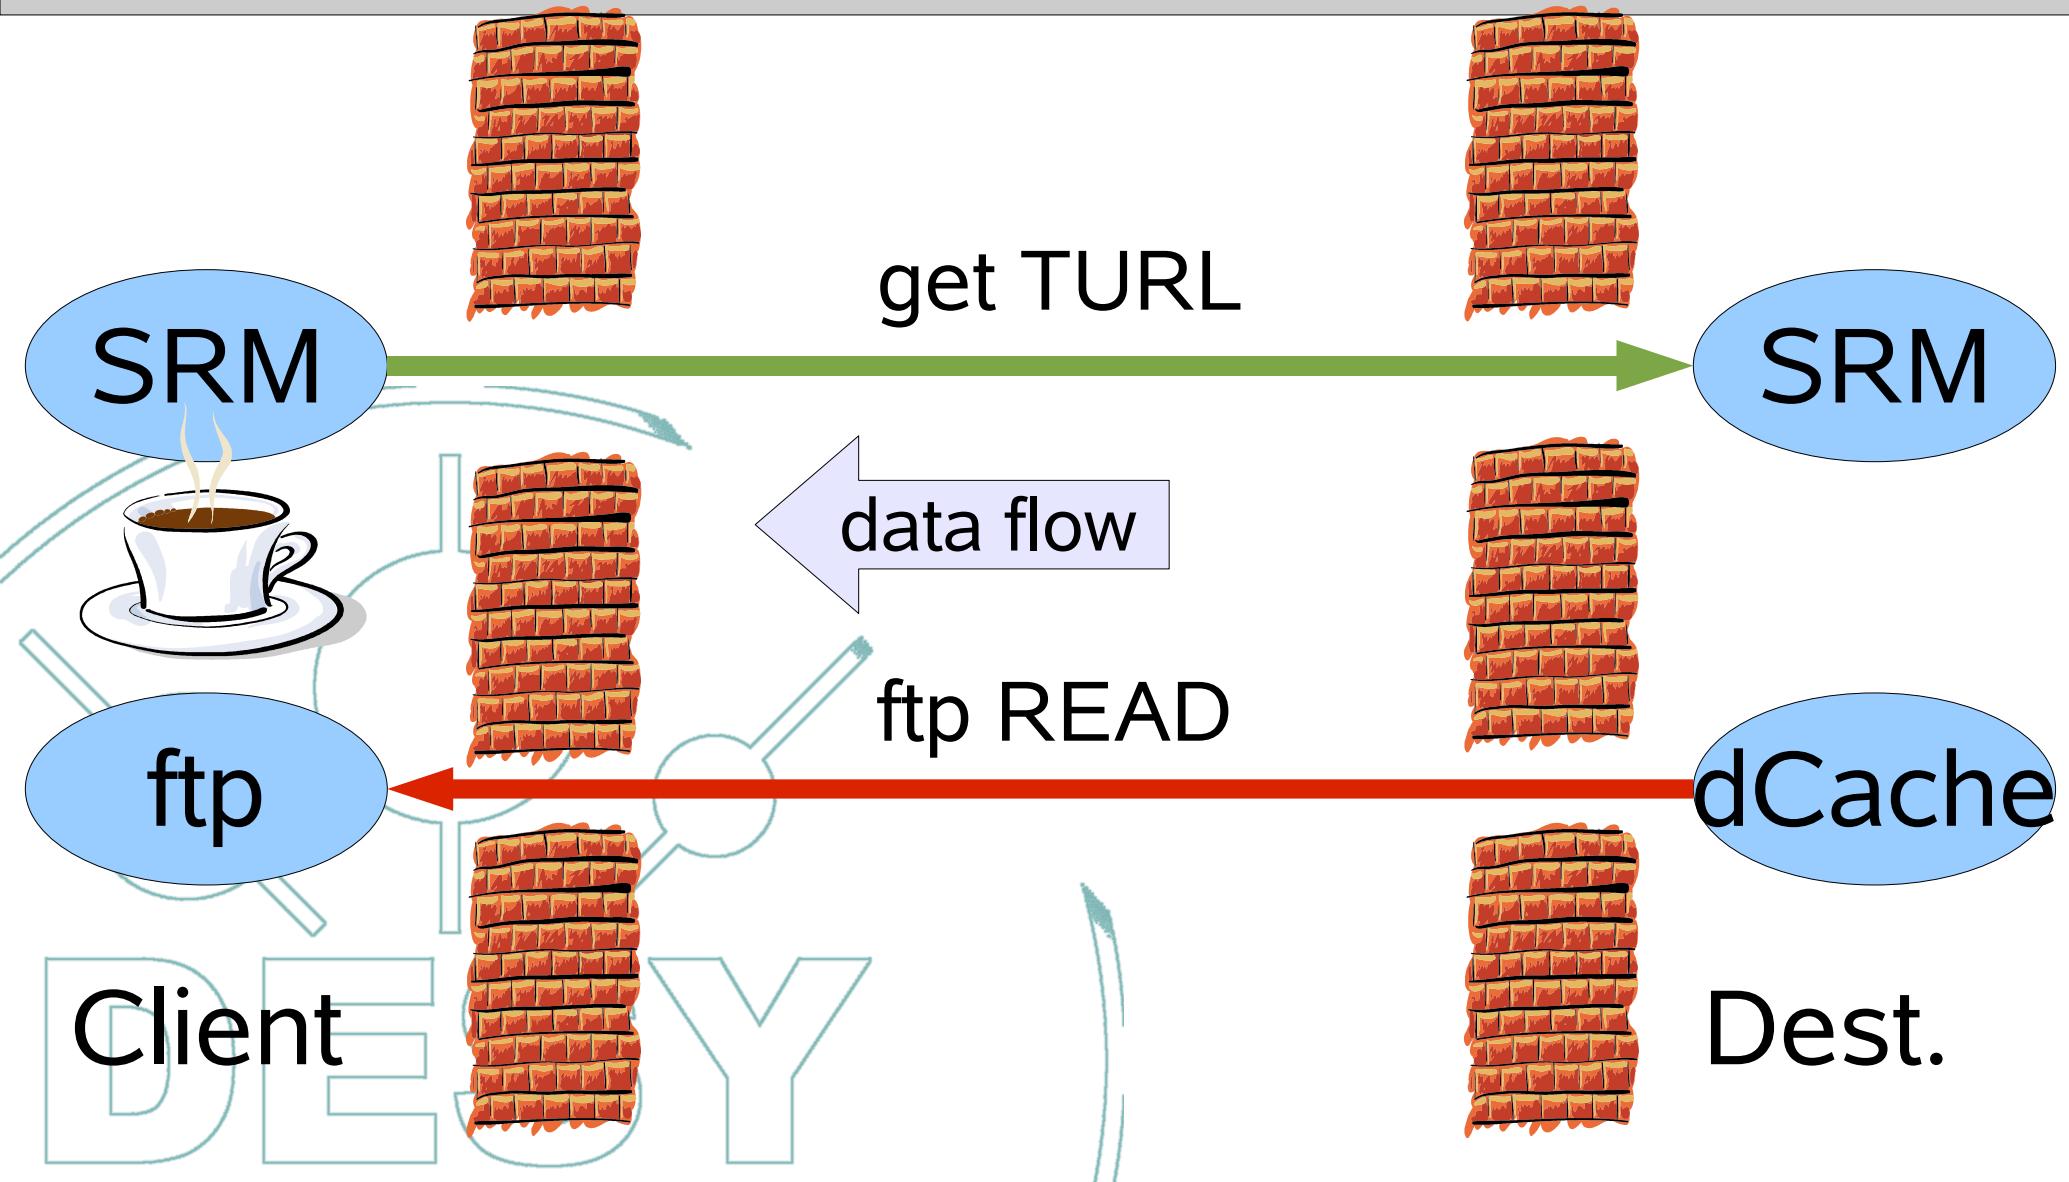

SRM for pNFS people

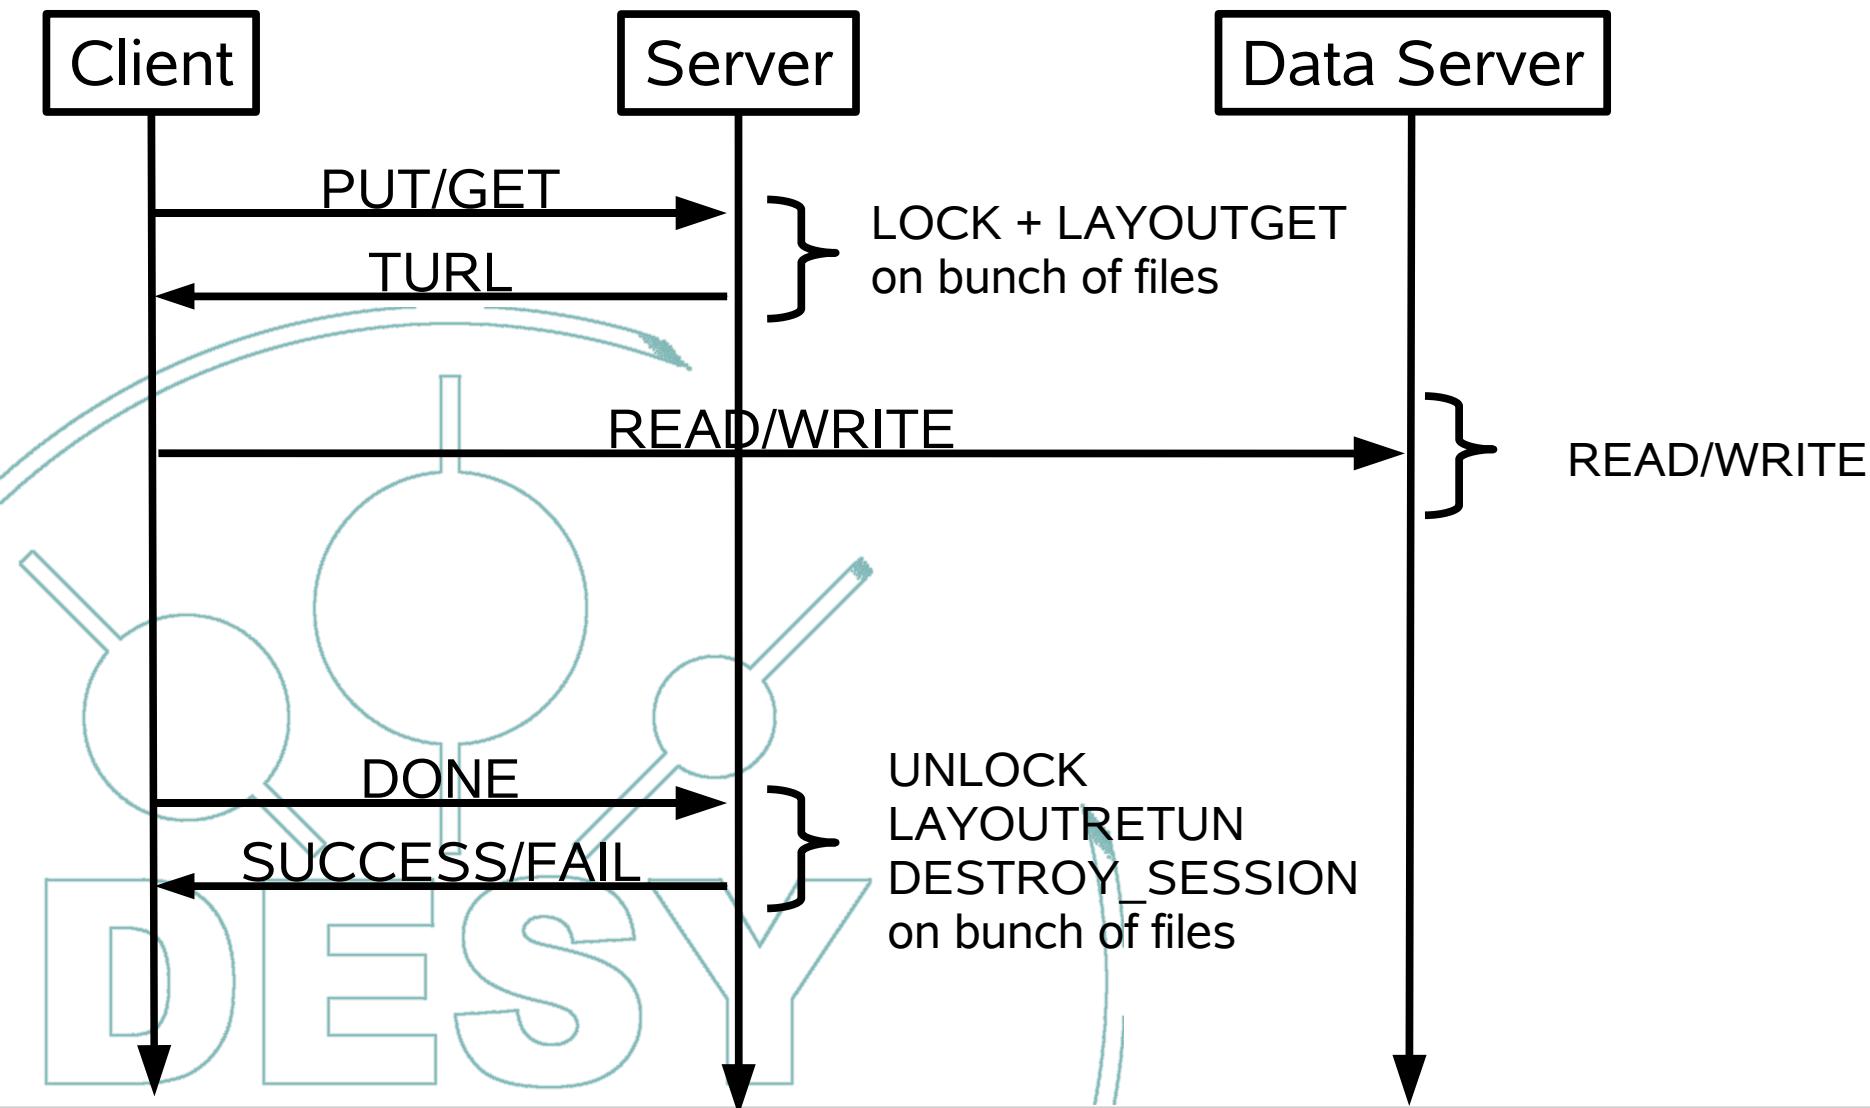


SRM COPY-PUSH

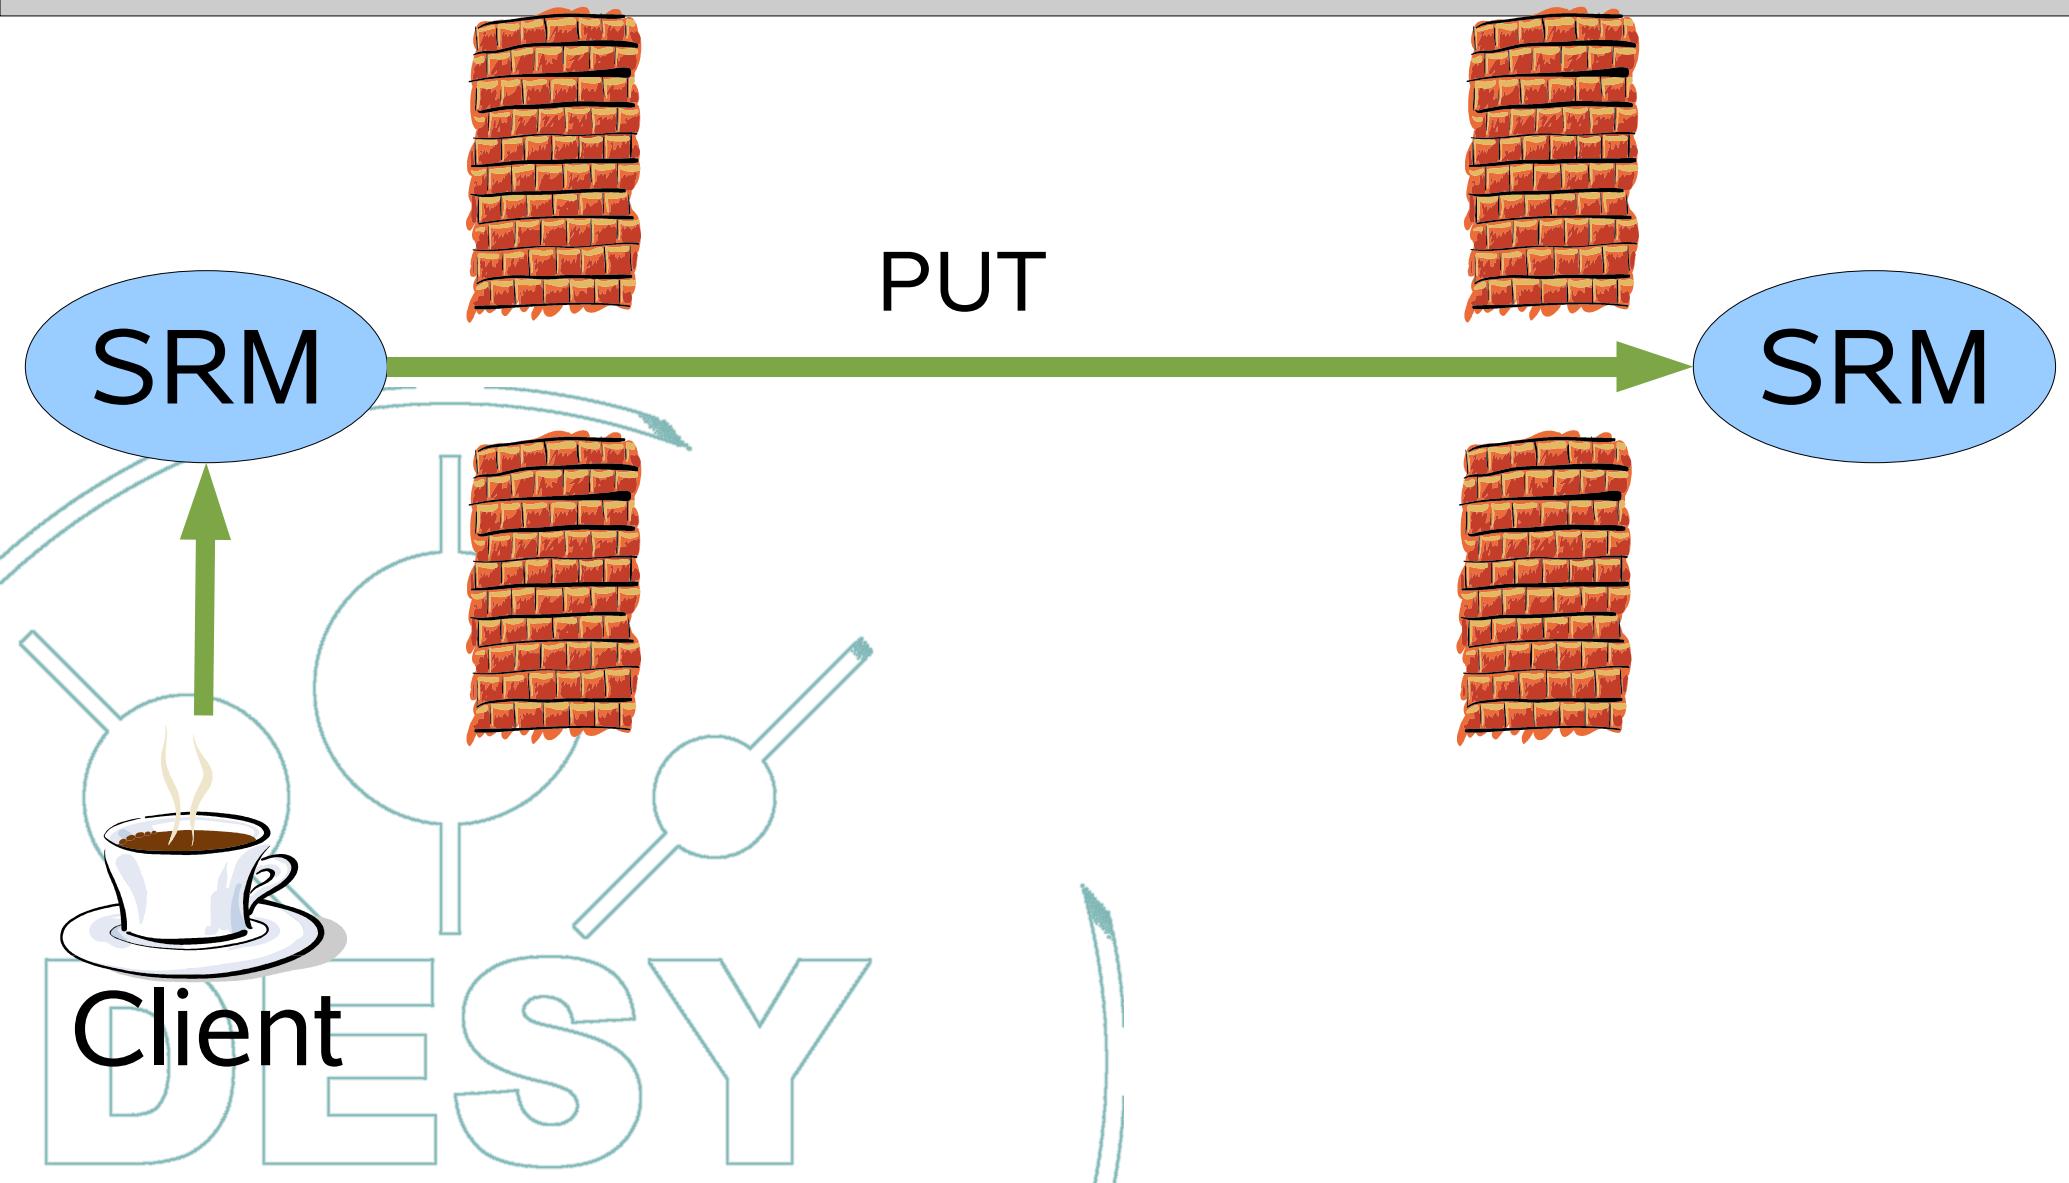


SRM COPY-PUSH

Need It!

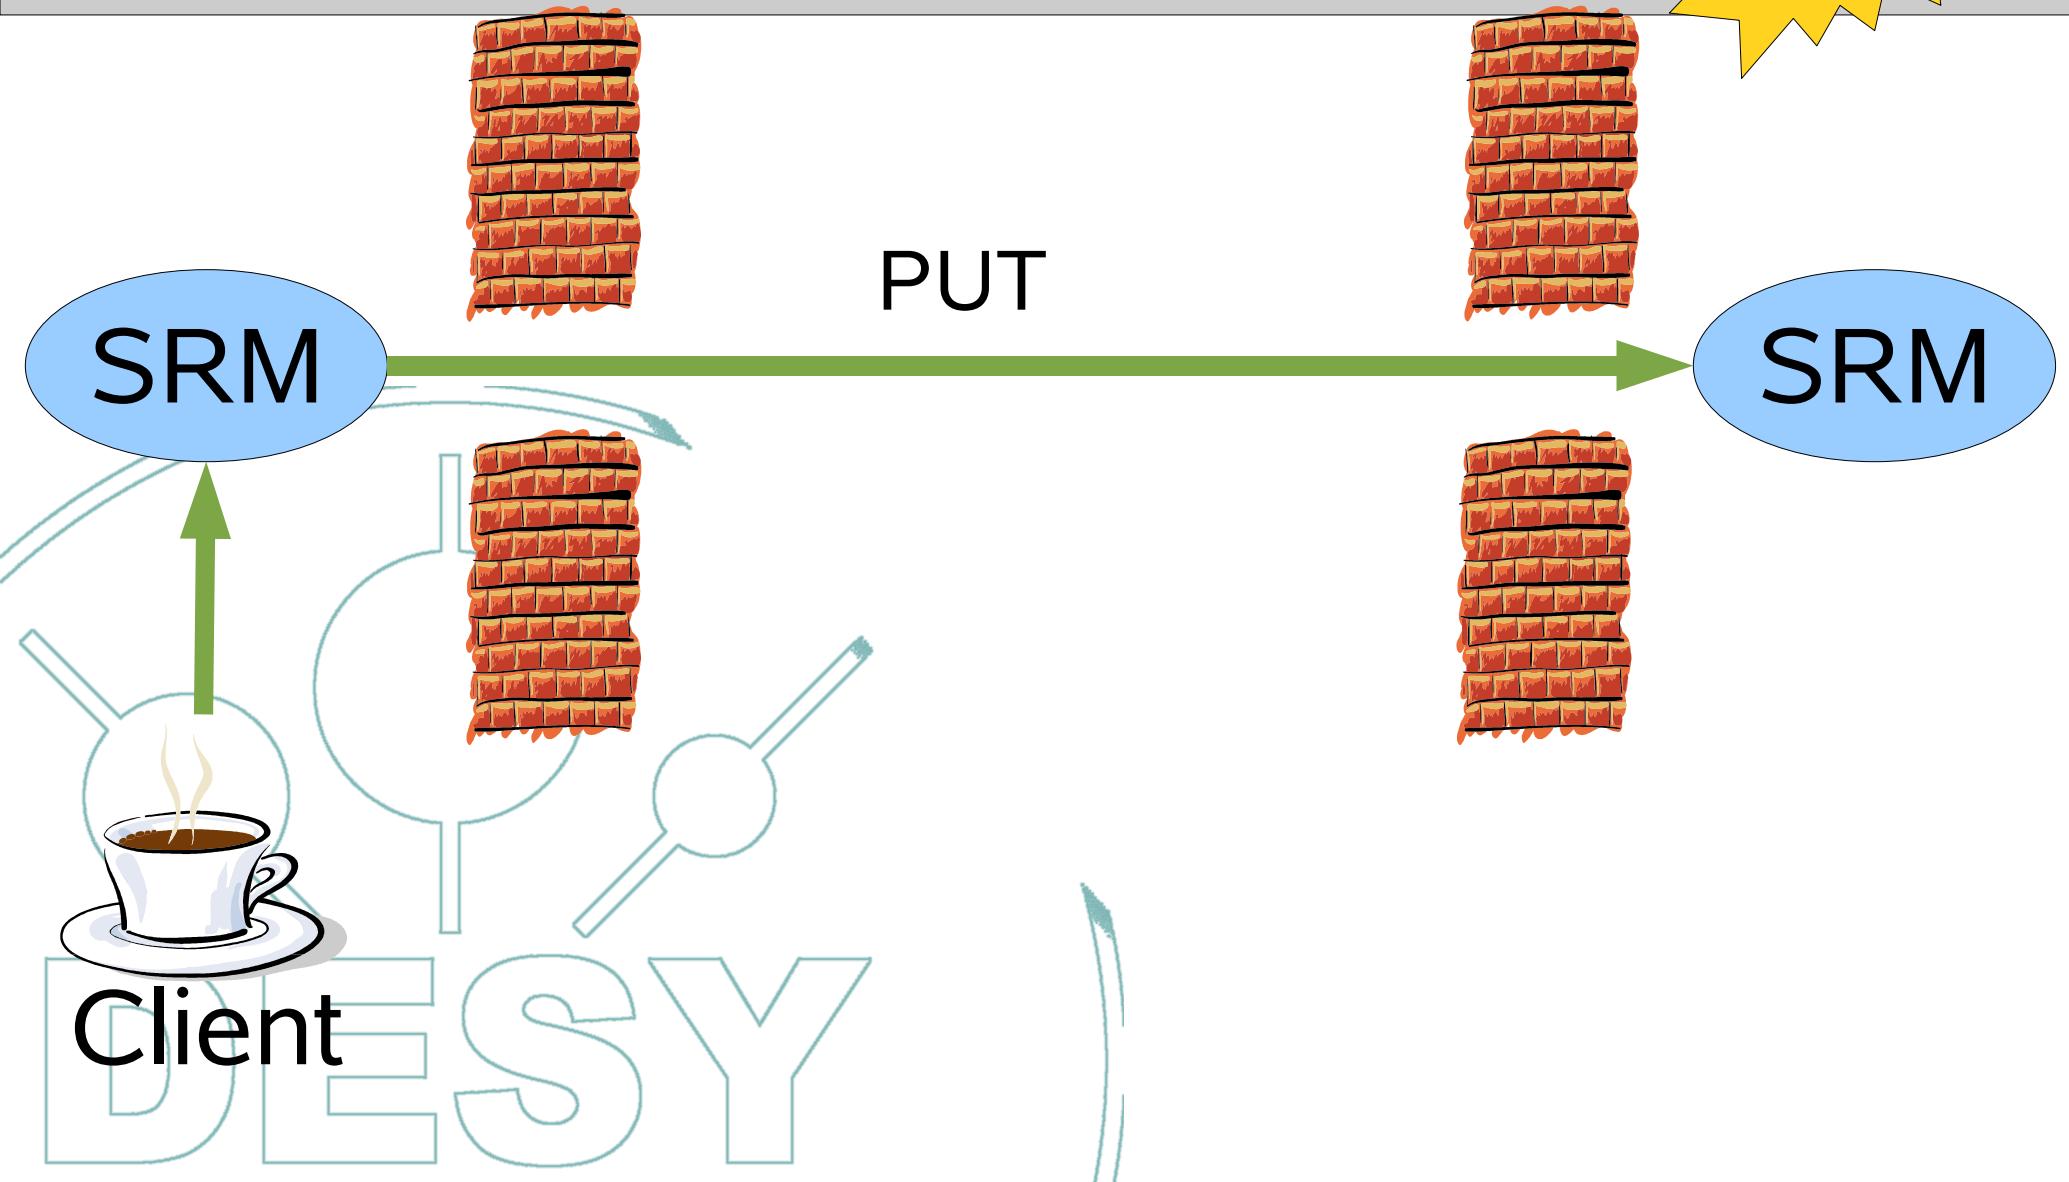


SRM COPY-PULL

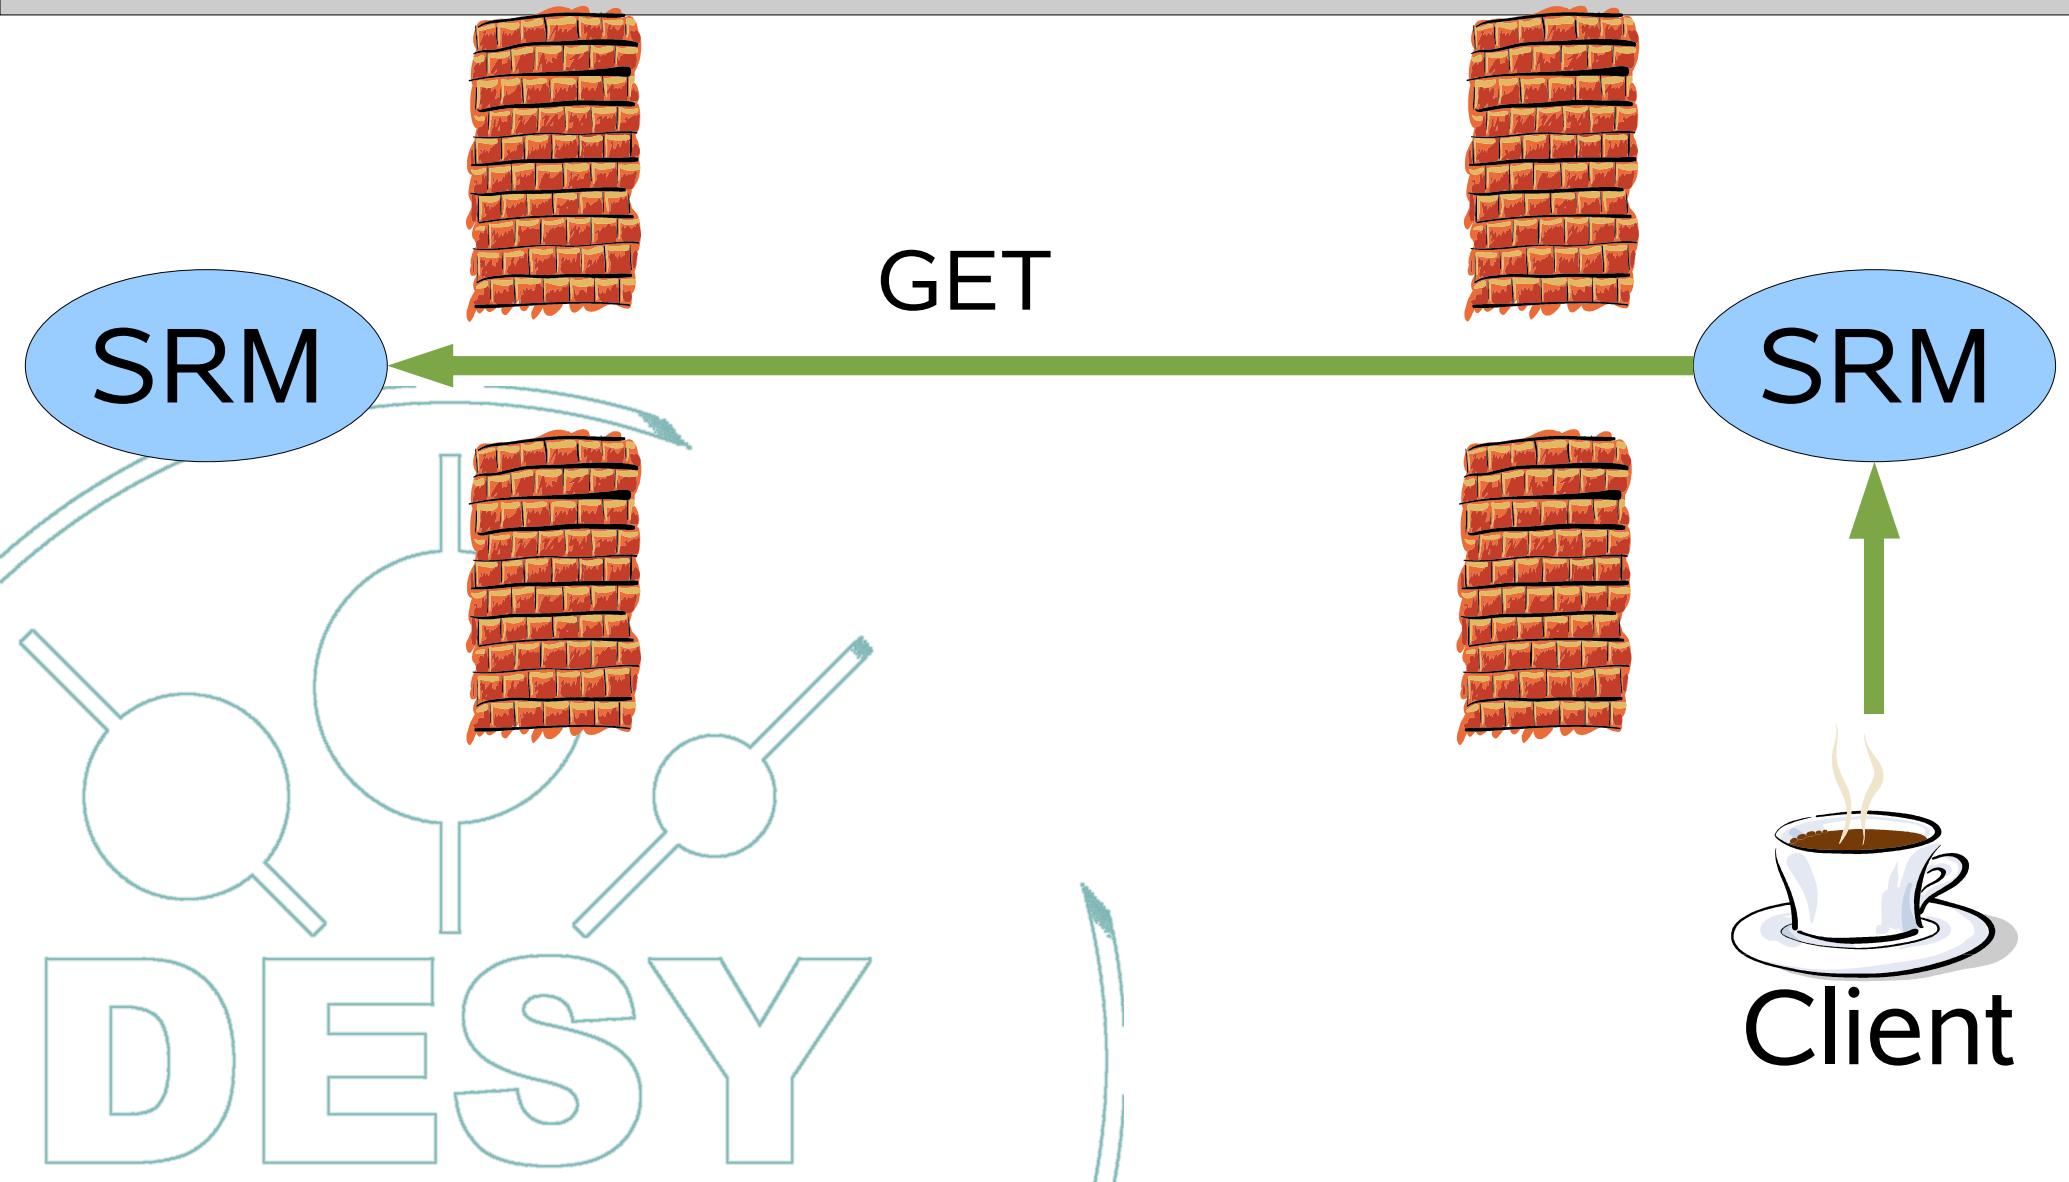

SRM COPY-PULL

Need It!

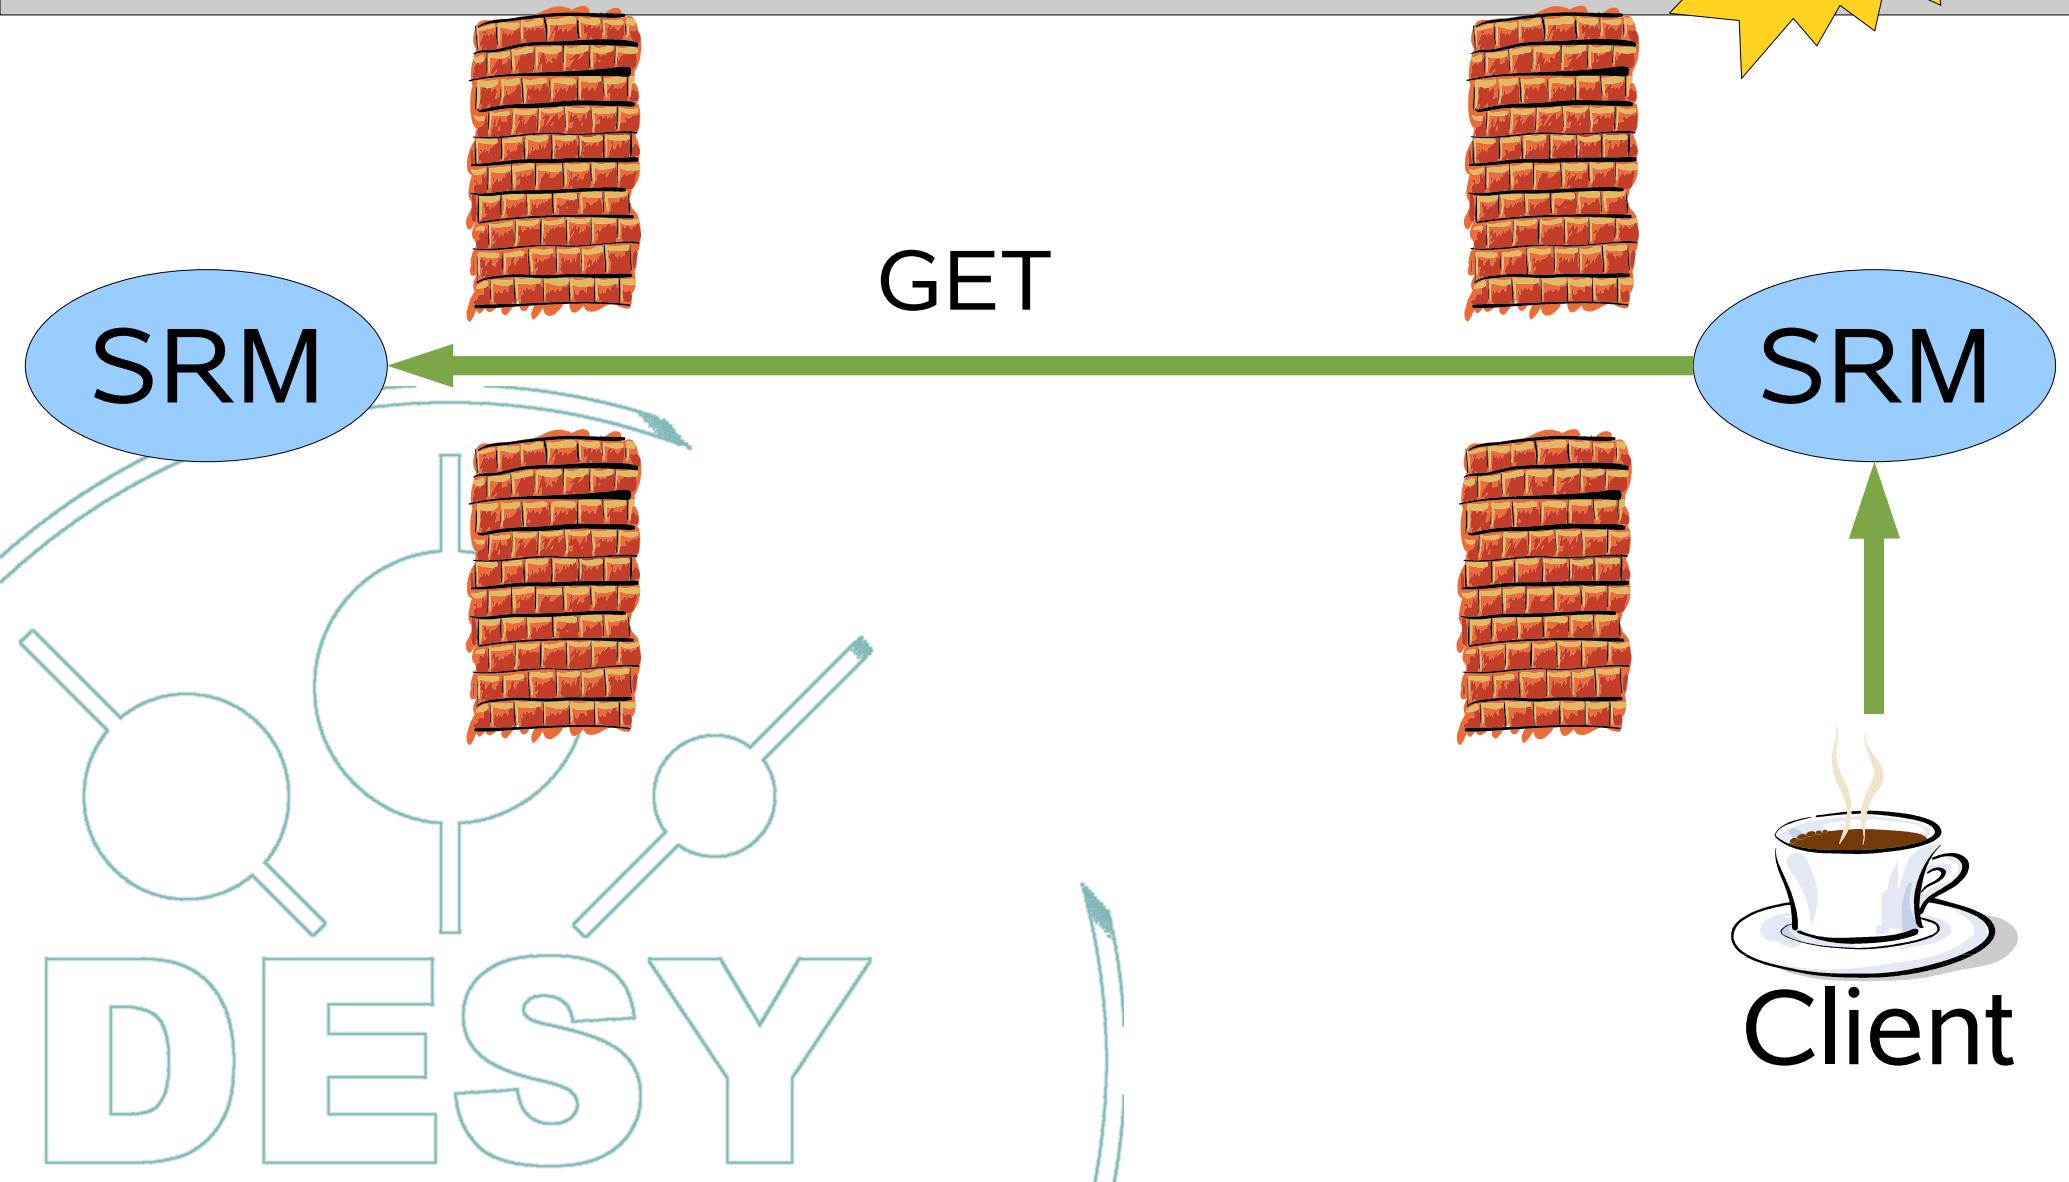


SRM Space Management

- allows to reserve space prior the transfer
 - Quota system, where you never get “file system full”
- has three space descriptions and allows transitions between them:

- CUSTODIAL, ONLINE (Tape1Disk1)
- CUSTODIAL, NEARLINE (Tape1Disk0)
- REPLICA, ONLINE (Tape0Disk1)




SRM Space Management (use case)

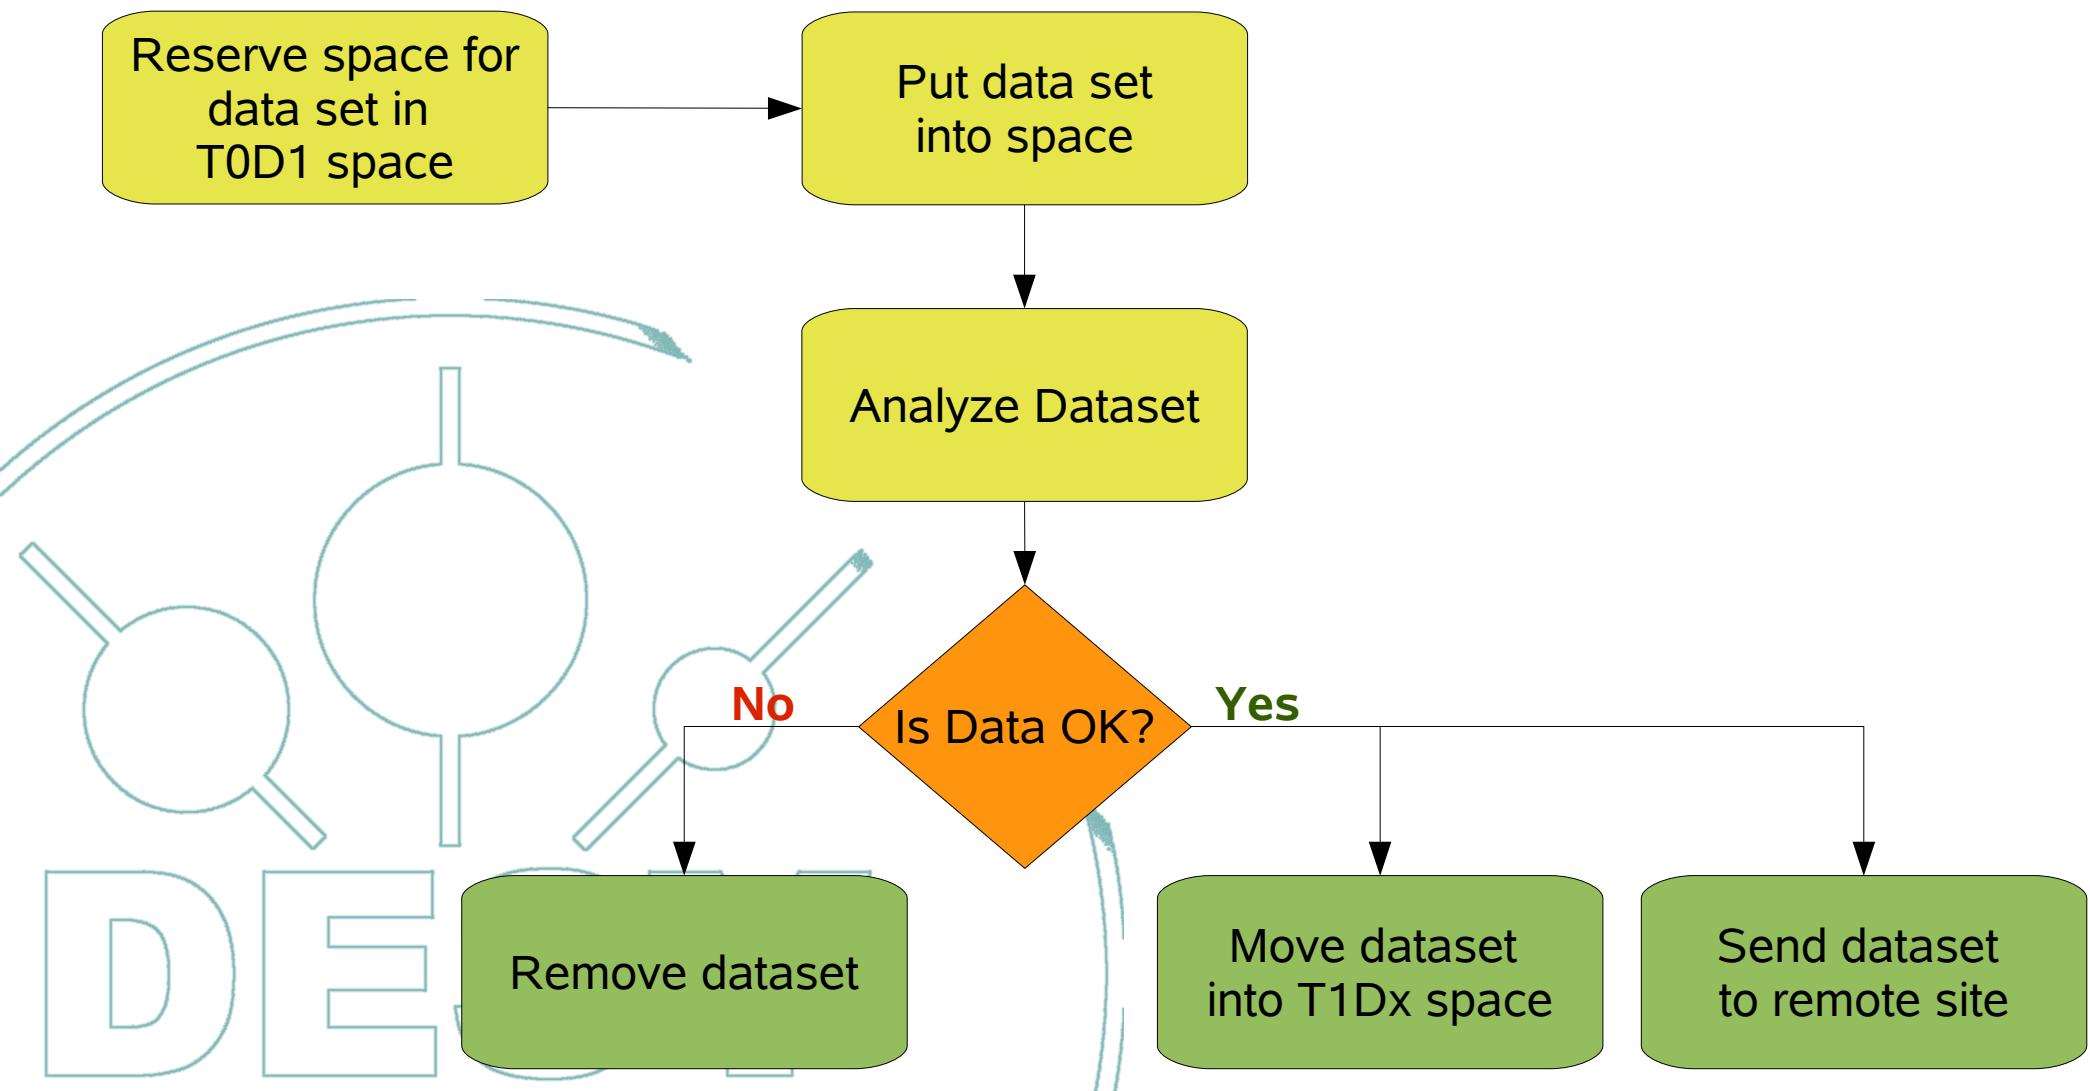

SRM Space Management (use)


Need It!

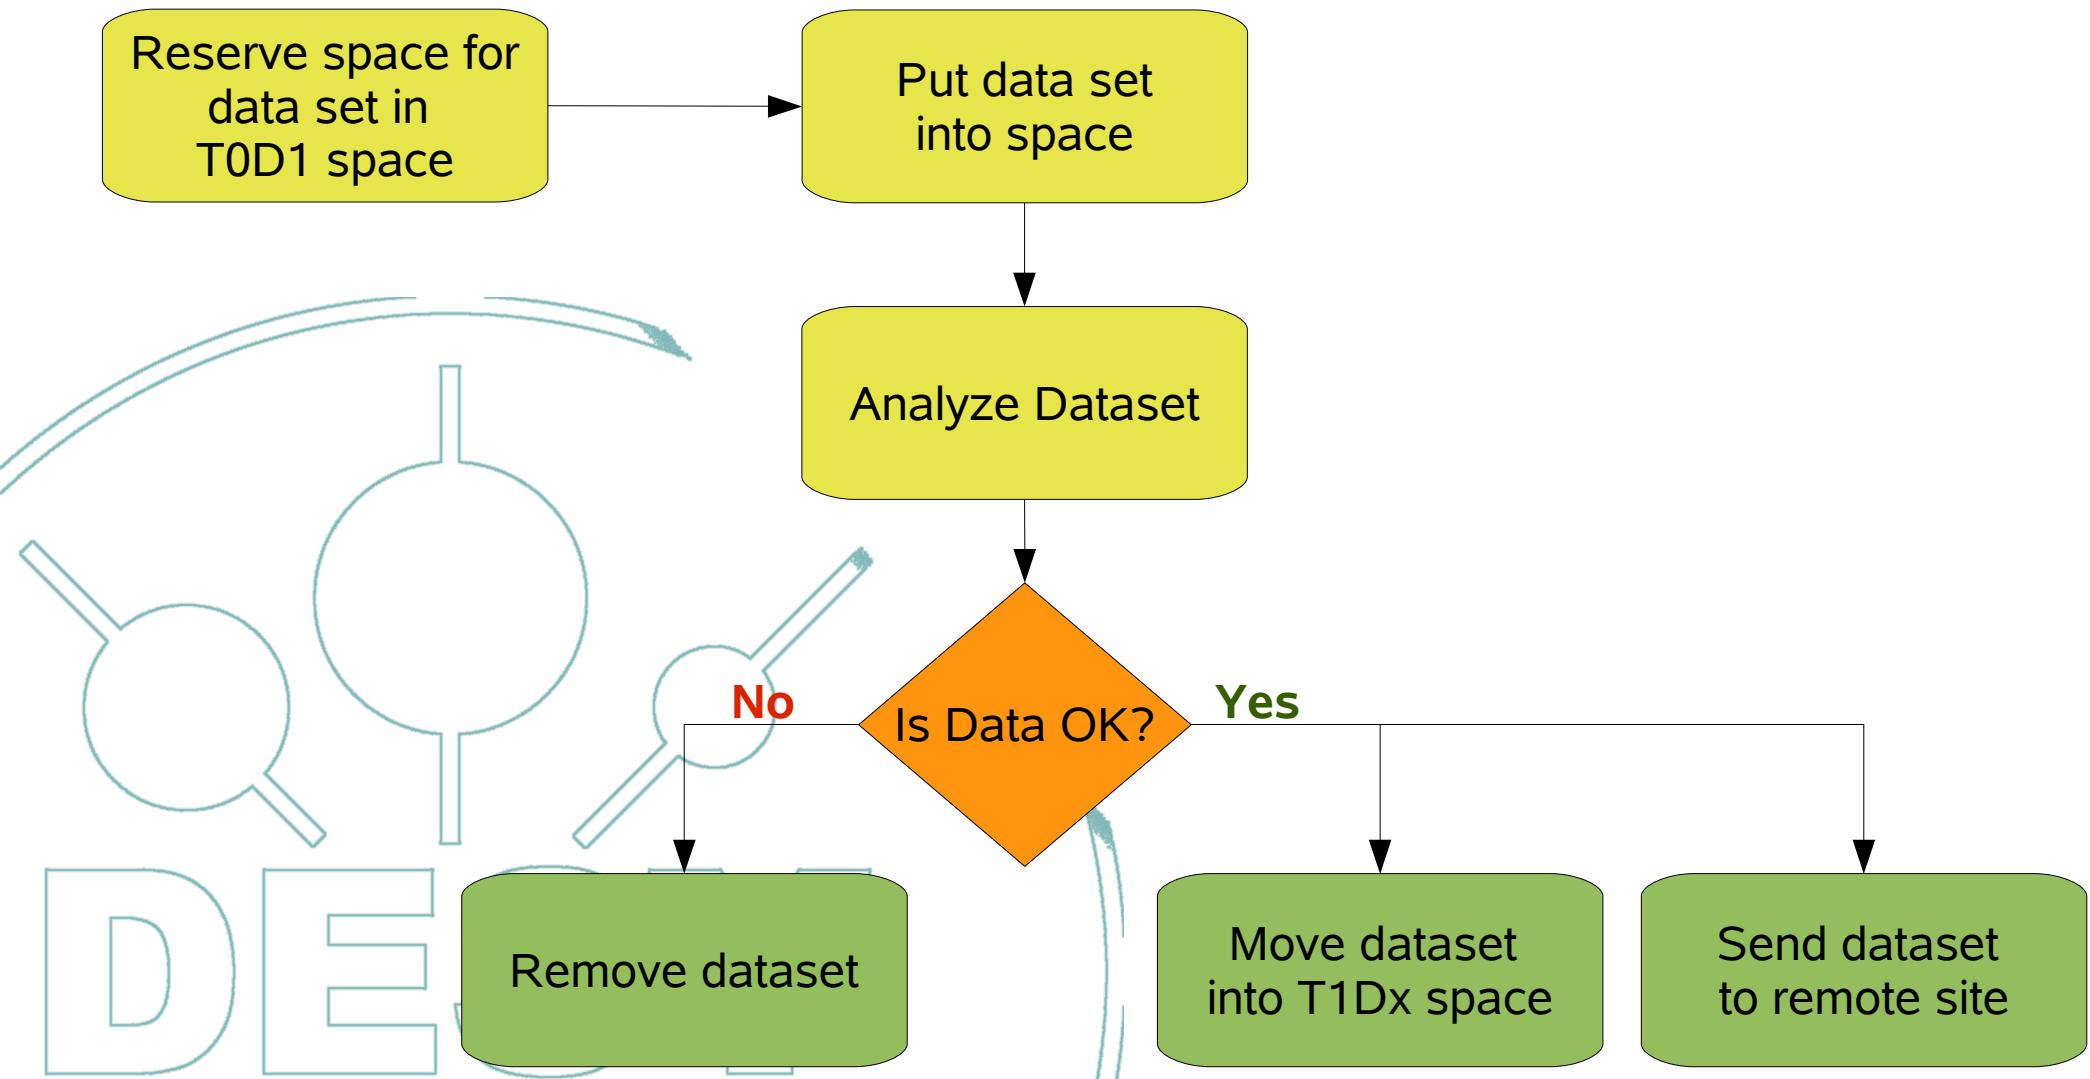

GRID Security


Need It!

- X.509 based certificates
- extensions for Virtual Organizations (VO) support
- no trusted hosts

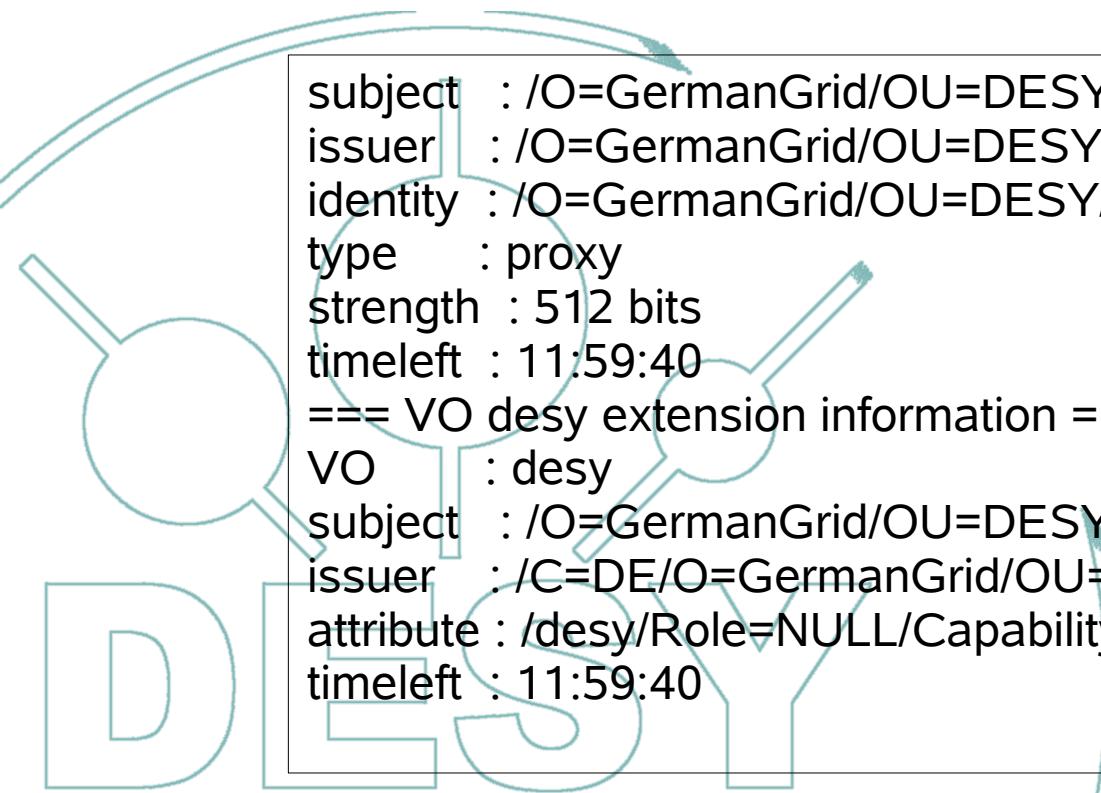


```
subject : /O=GermanGrid/OU=DESY/CN=Tigran Mkrtchyan/CN=proxy
issuer  : /O=GermanGrid/OU=DESY/CN=Tigran Mkrtchyan
identity : /O=GermanGrid/OU=DESY/CN=Tigran Mkrtchyan
type    : proxy
strength : 512 bits
timeleft : 11:59:40
==== VO desy extension information ====
VO      : desy
subject : /O=GermanGrid/OU=DESY/CN=Tigran Mkrtchyan
issuer  : /C=DE/O=GermanGrid/OU=DESY/CN=host/grid-voms.desy.de
attribute : /desy/Role=NULL/Capability=NULL
timeleft : 11:59:40
```

SRM – Uniform Data Access

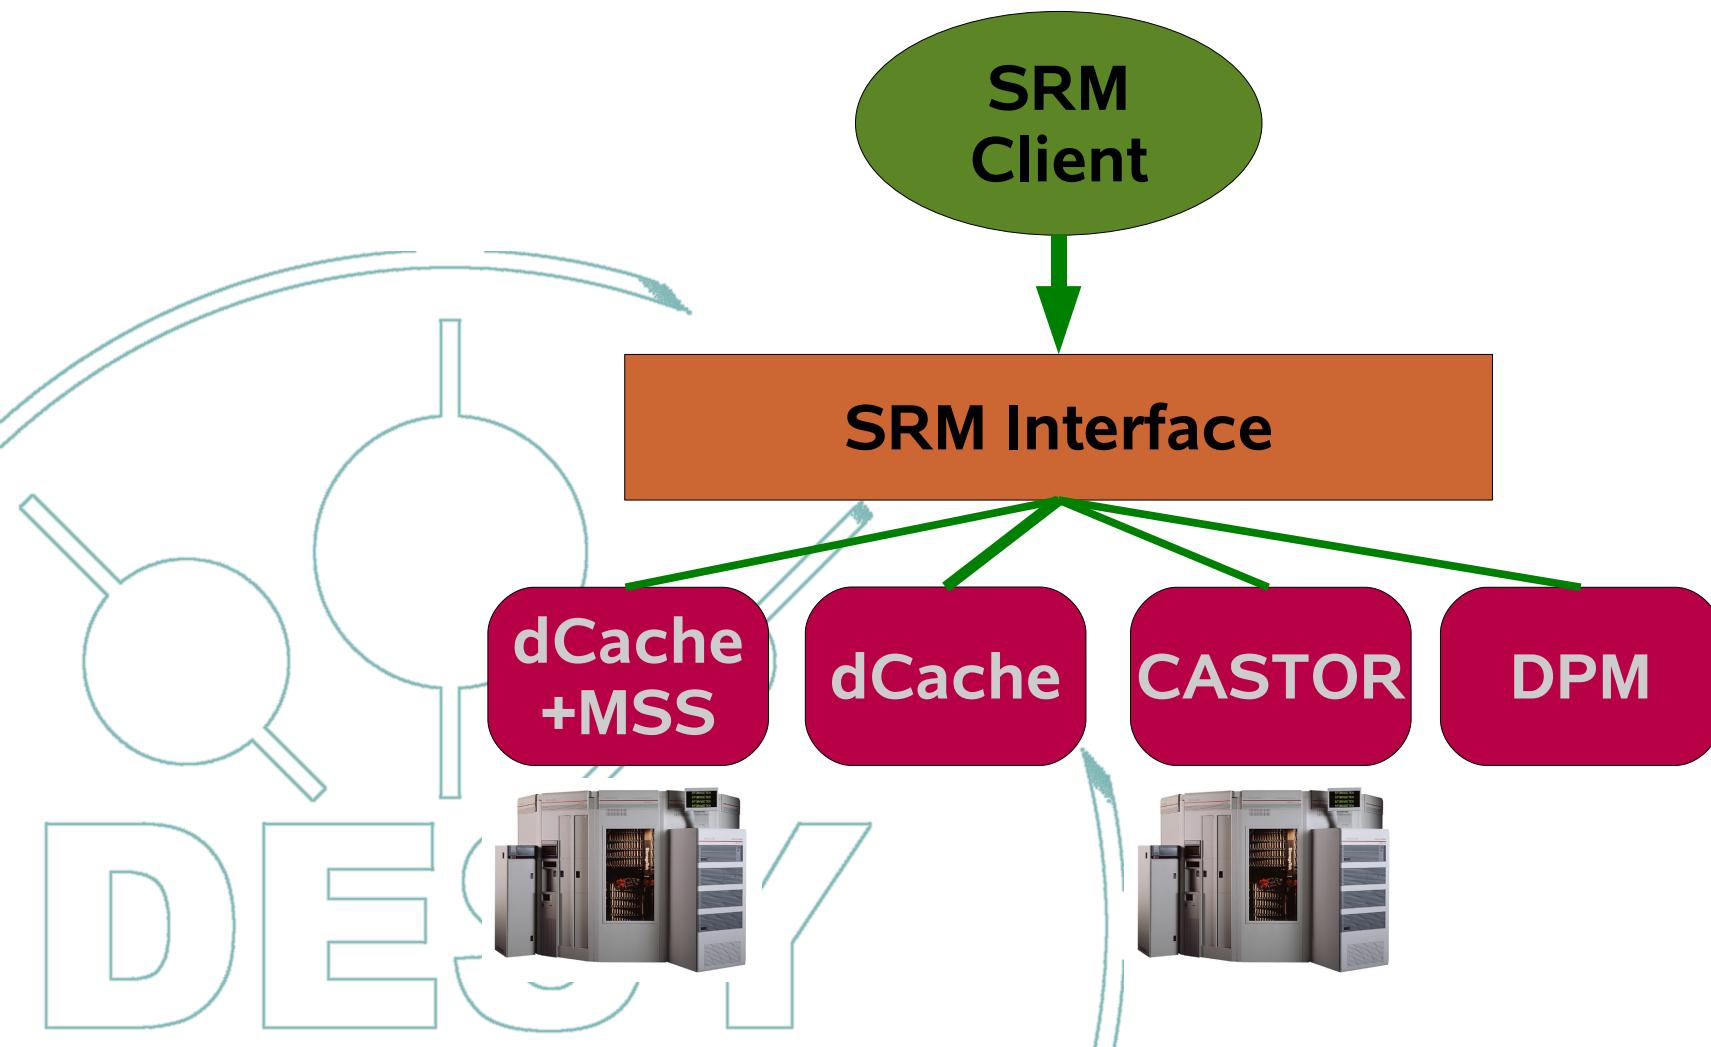


SRM – Uniform Data Access

Need It!

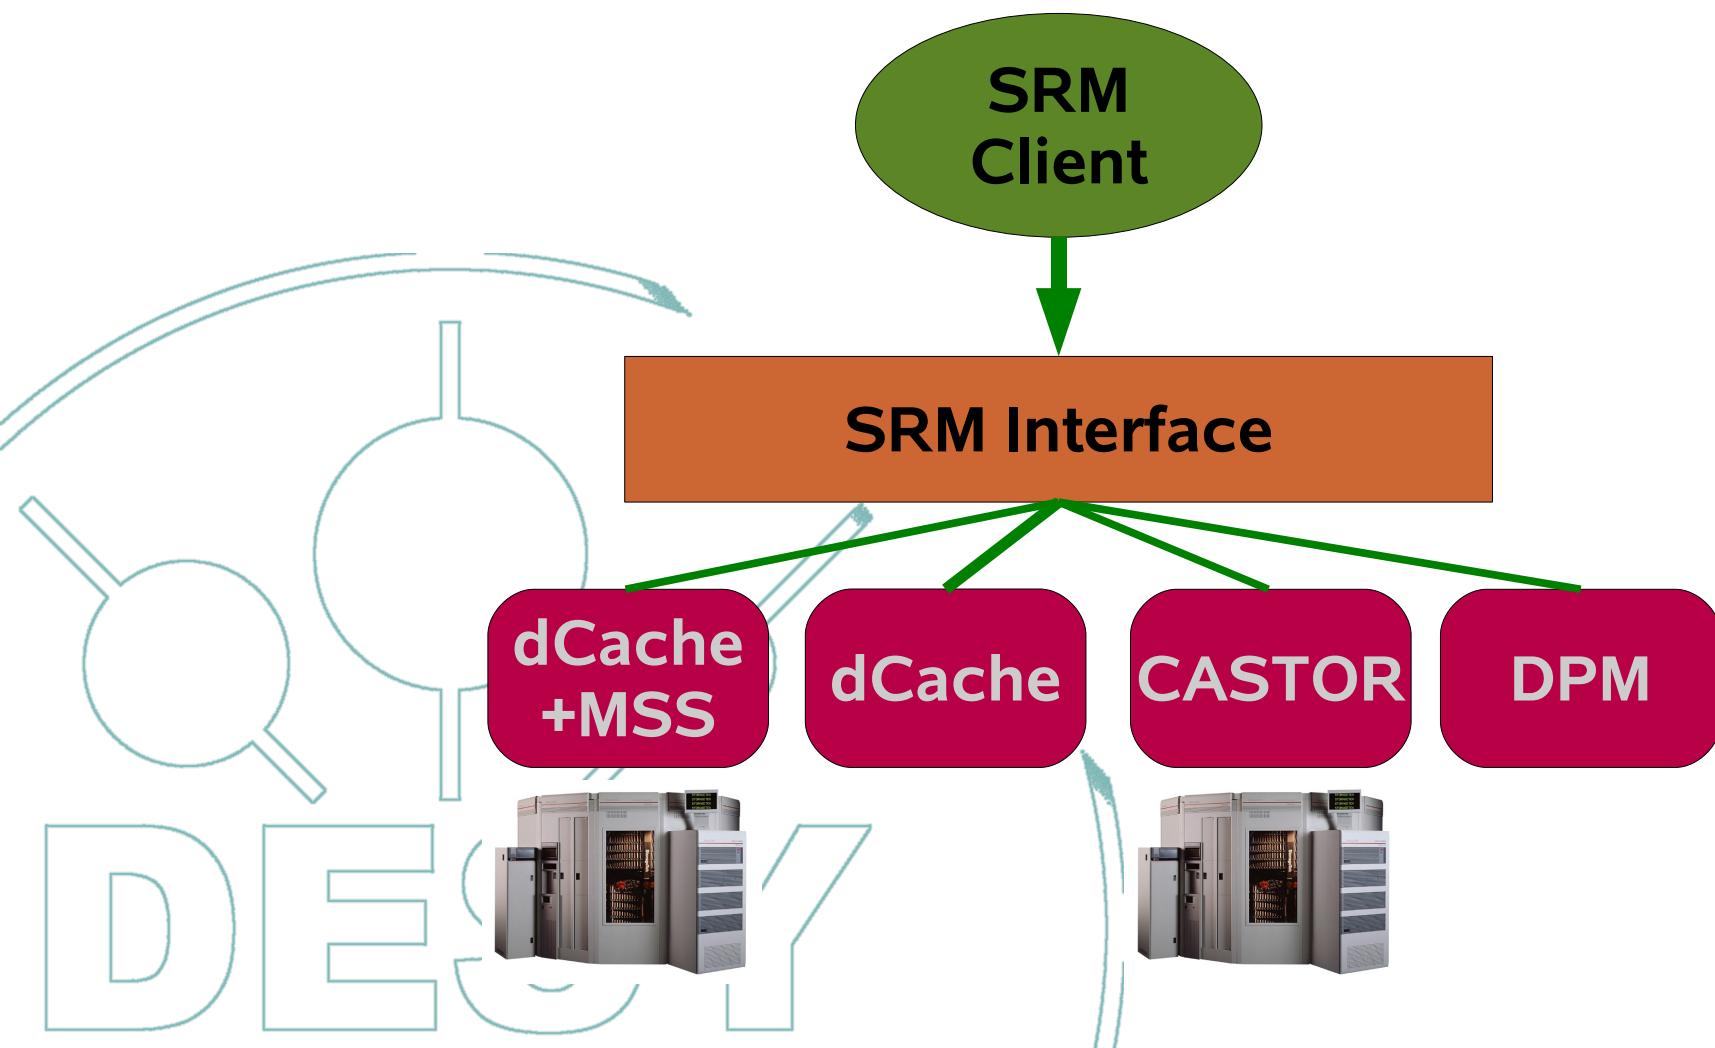


Mission ~~i~~Possible

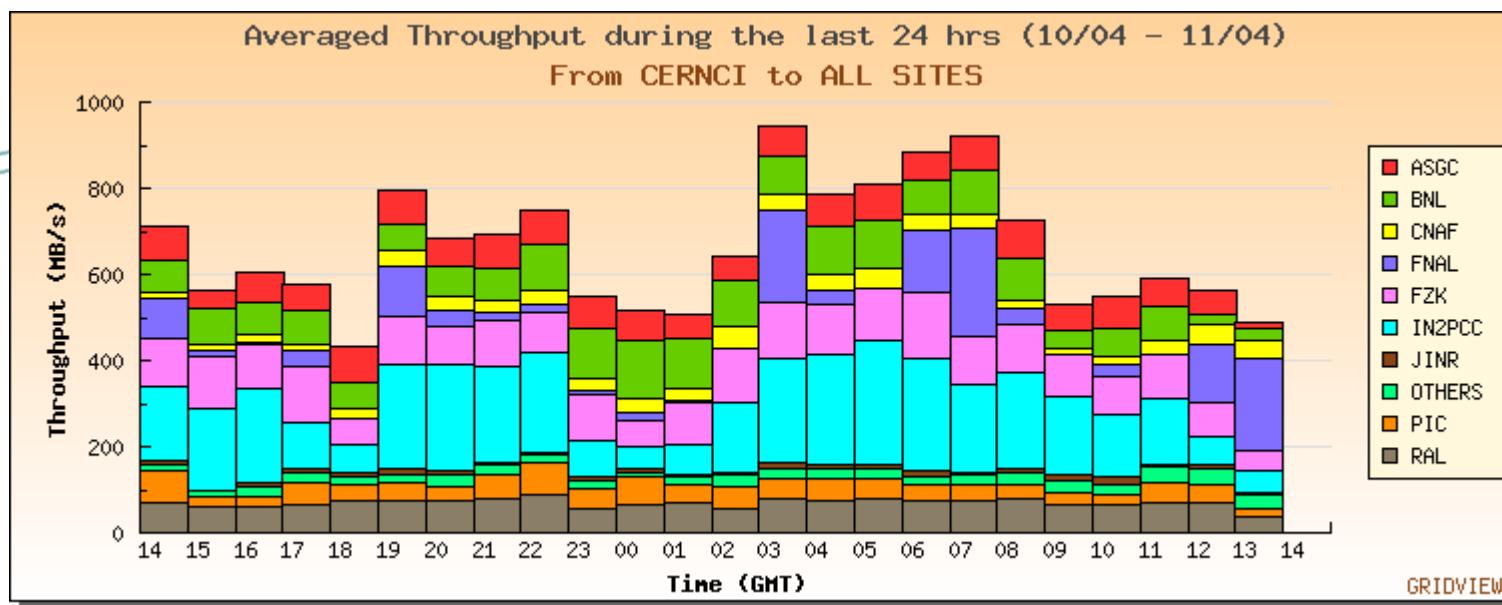


We are doing well!

Mission ~~iM~~Possible

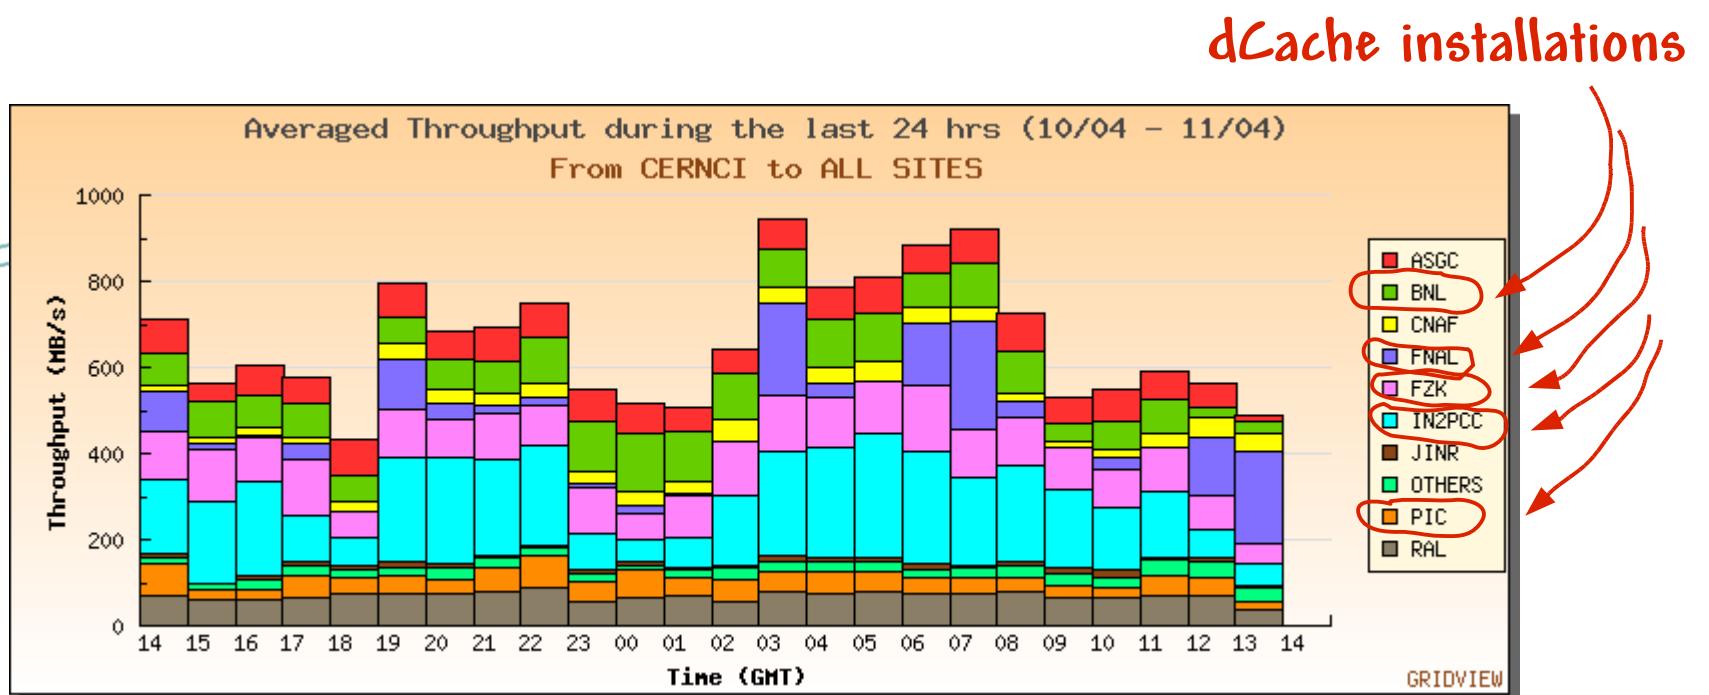


We are doing well!

dCache - Background

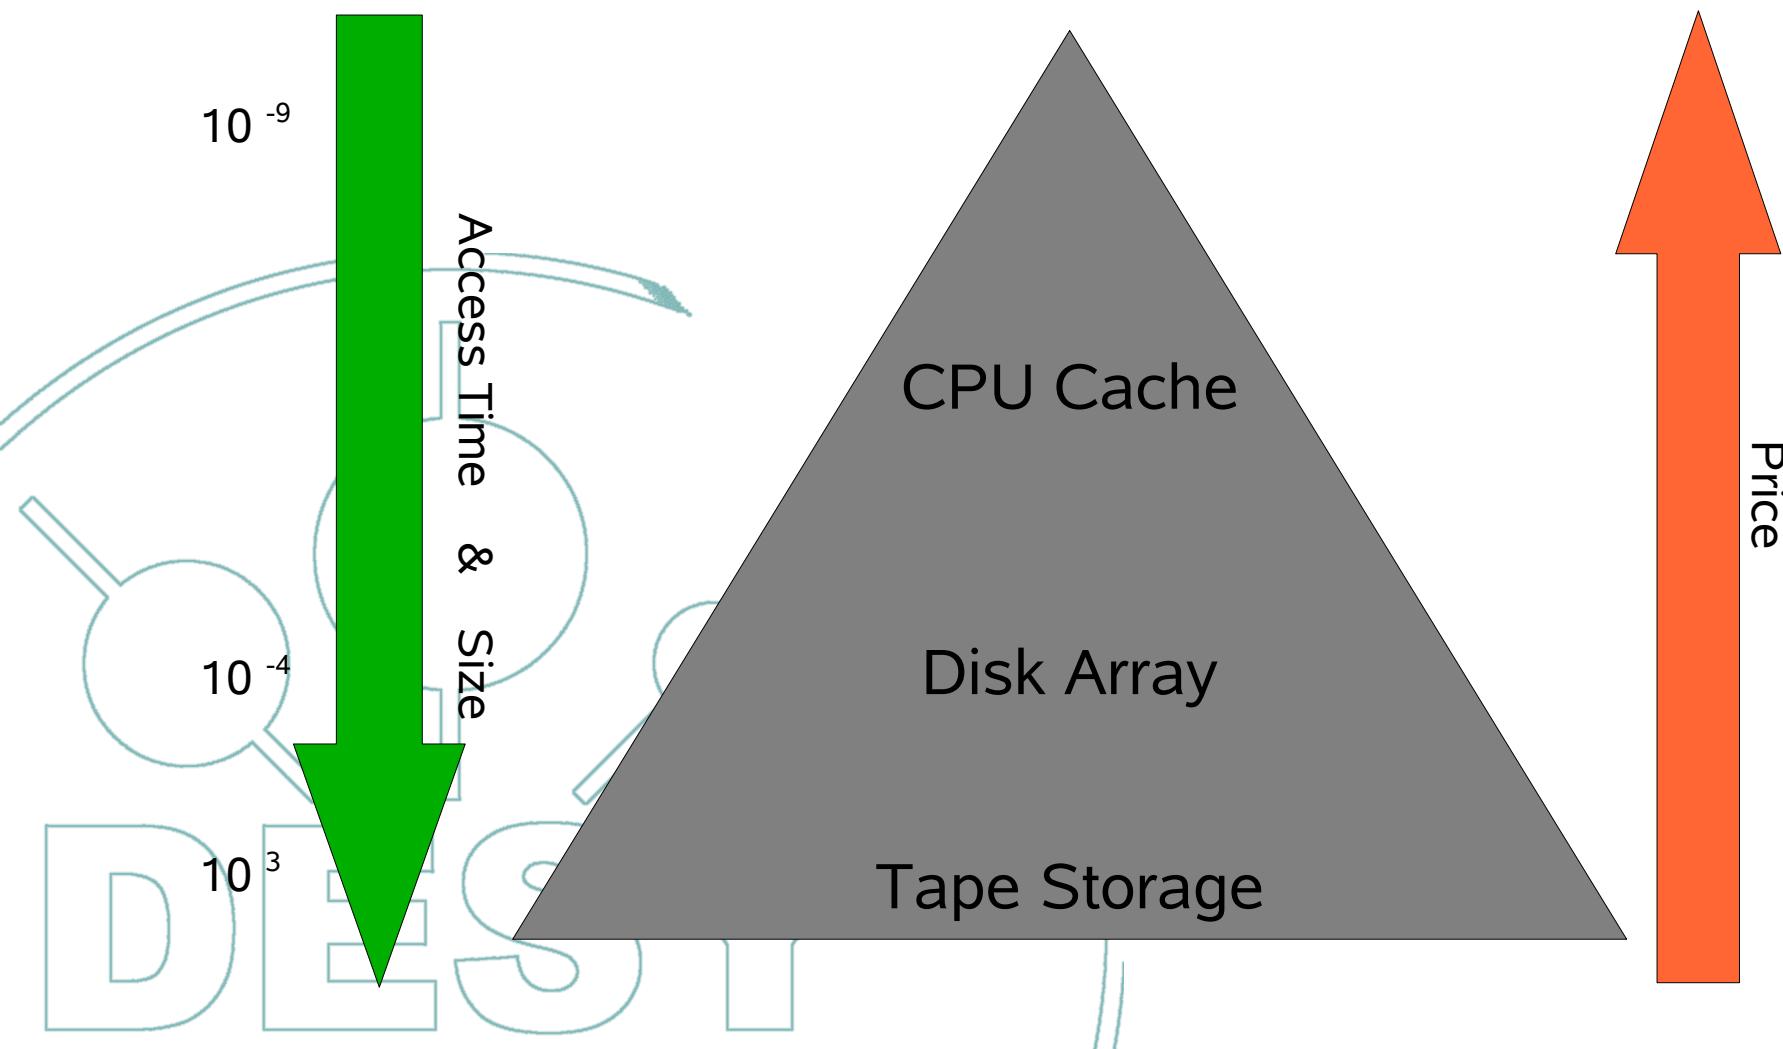

dCache - Background

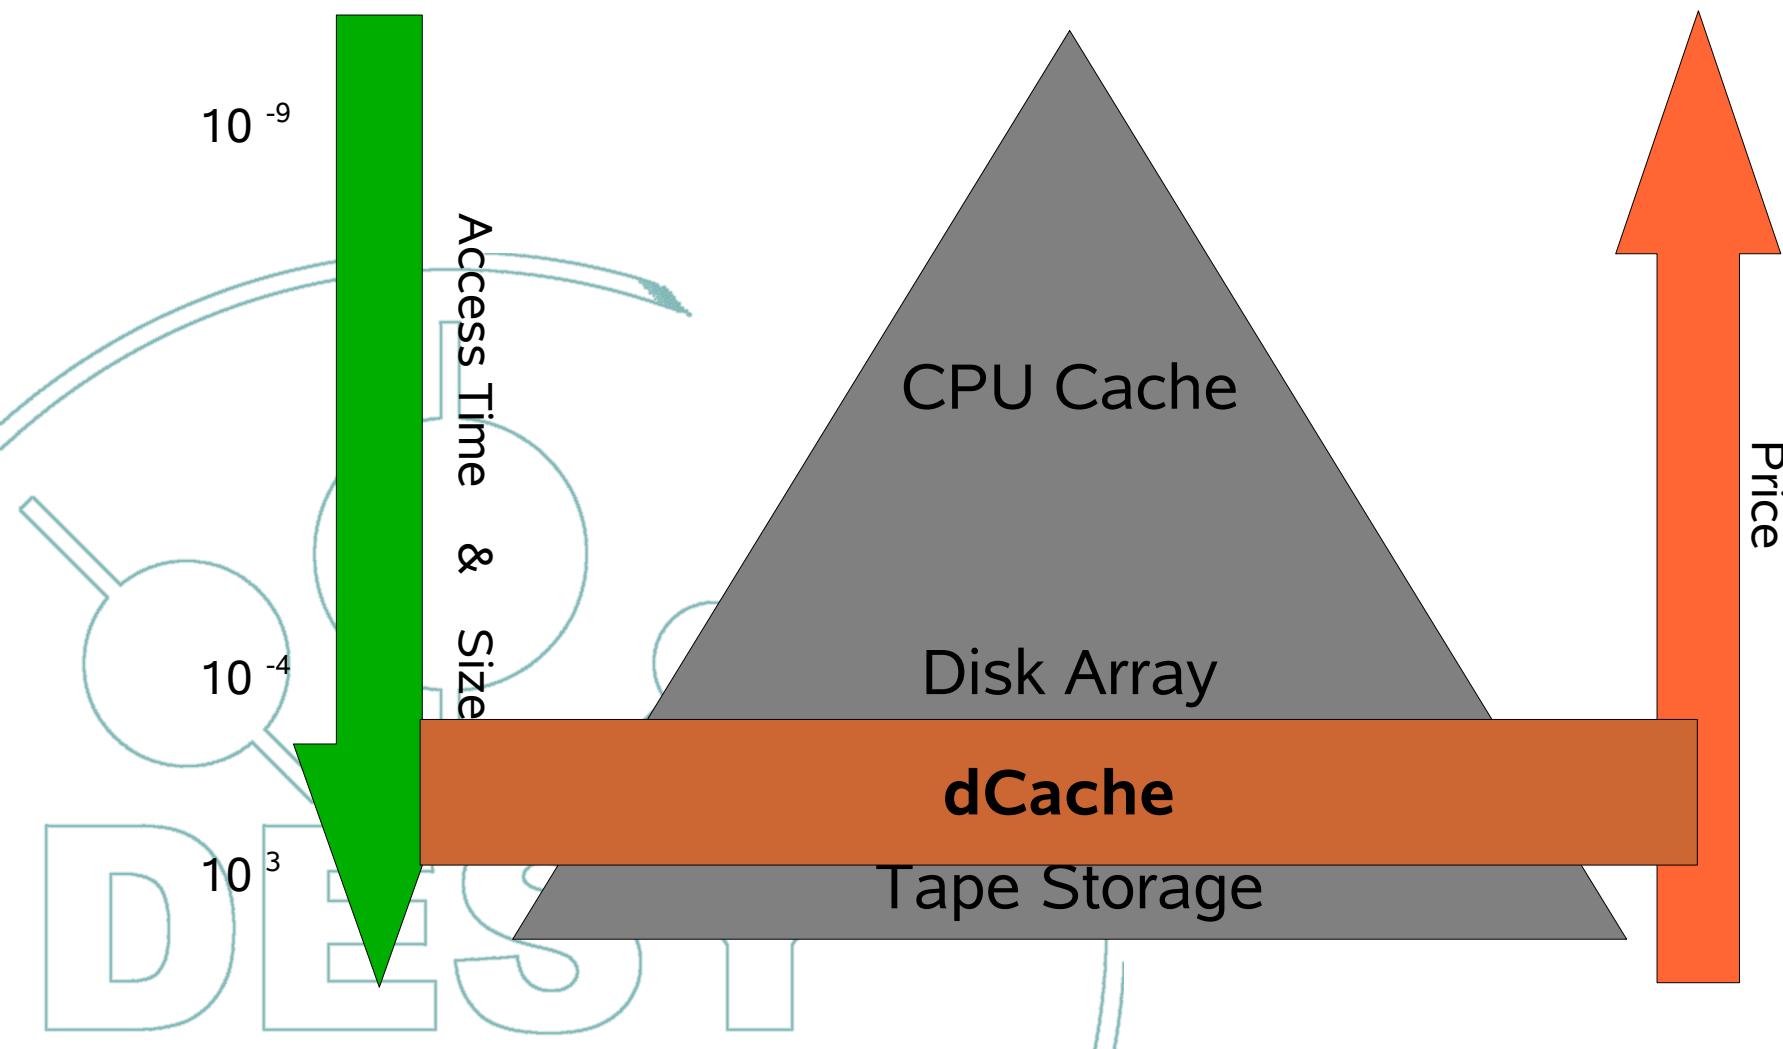


The goal of the project is:

- to share and optimize access to non-sharable storage devices, like tape drives,
- make use of slower and cheaper drive technology without overall performance reduction,
- to provide a system for storing and retrieving huge amounts of data, distributed among a large number of heterogeneous server nodes, under a single virtual filesystem tree with a variety of standard access methods.




Requirement is:


to provide a system for storing and retrieving huge amounts of data, distributed among a large number of heterogeneous server nodes, under a single virtual filesystem tree with a variety of standard access methods.

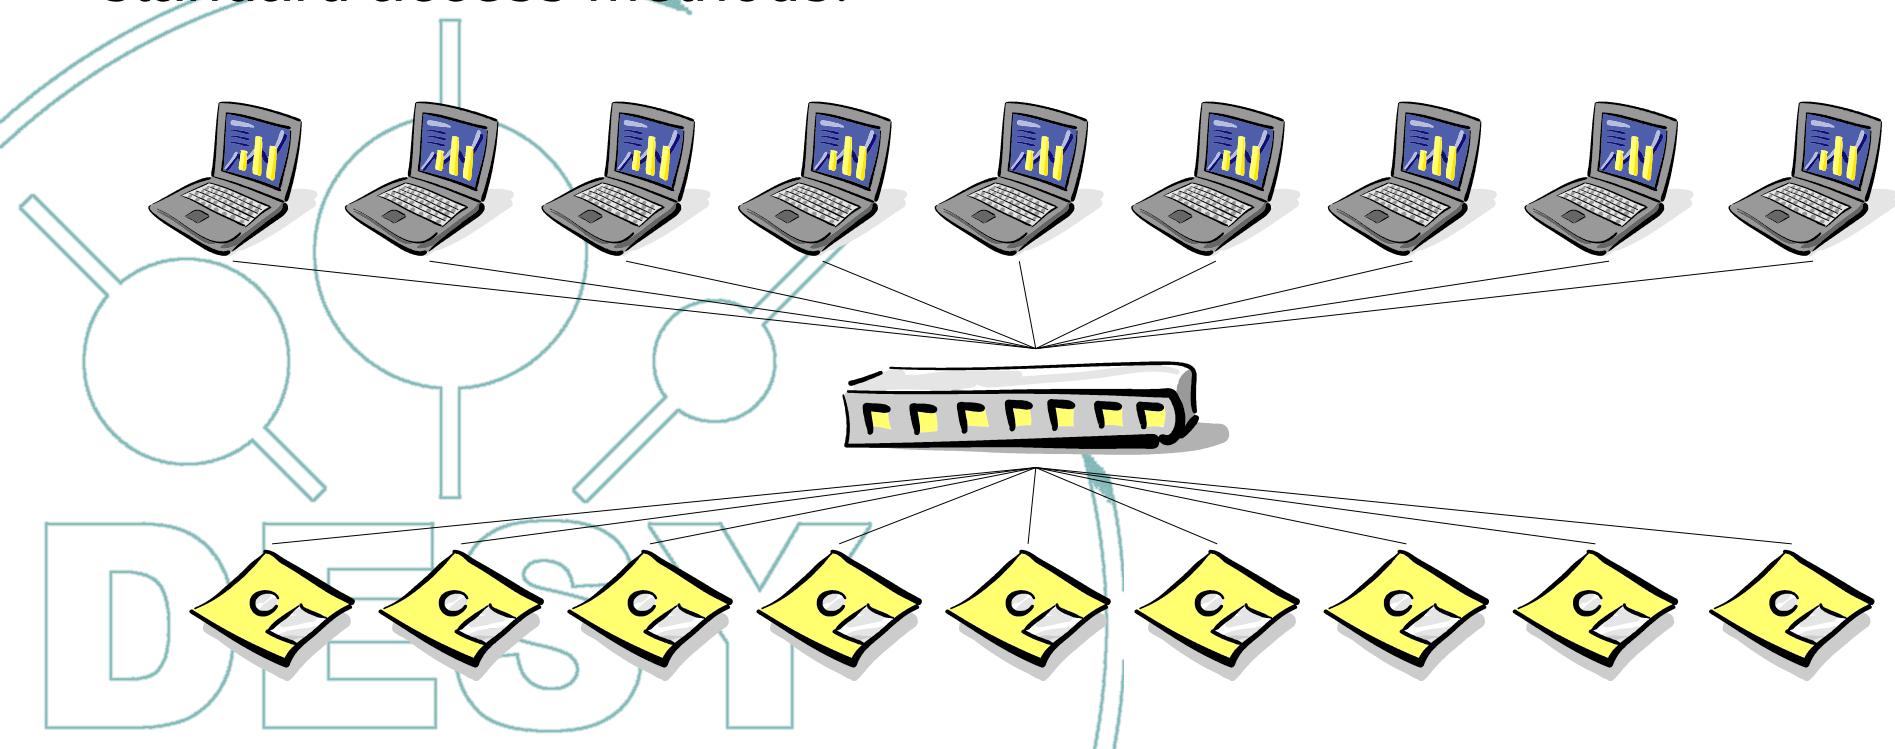

dCache Design

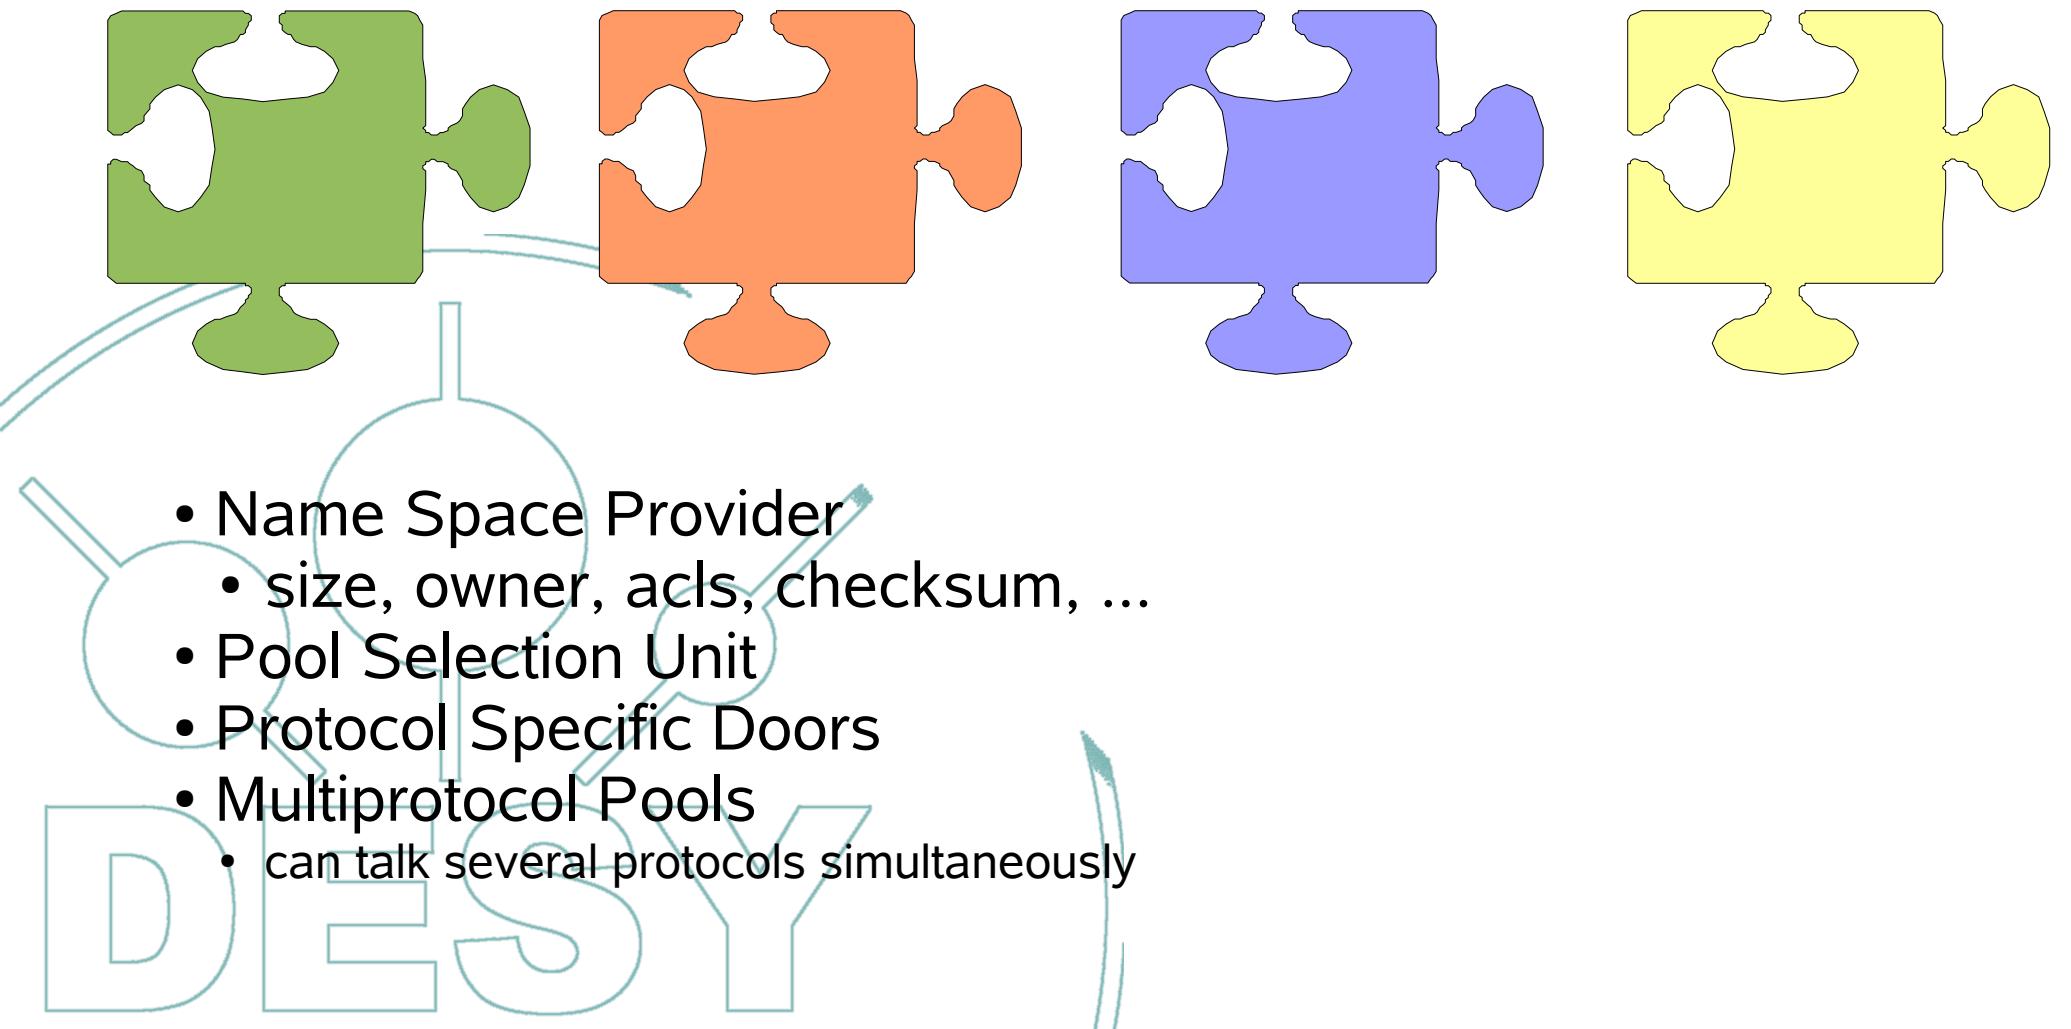

dCache Design

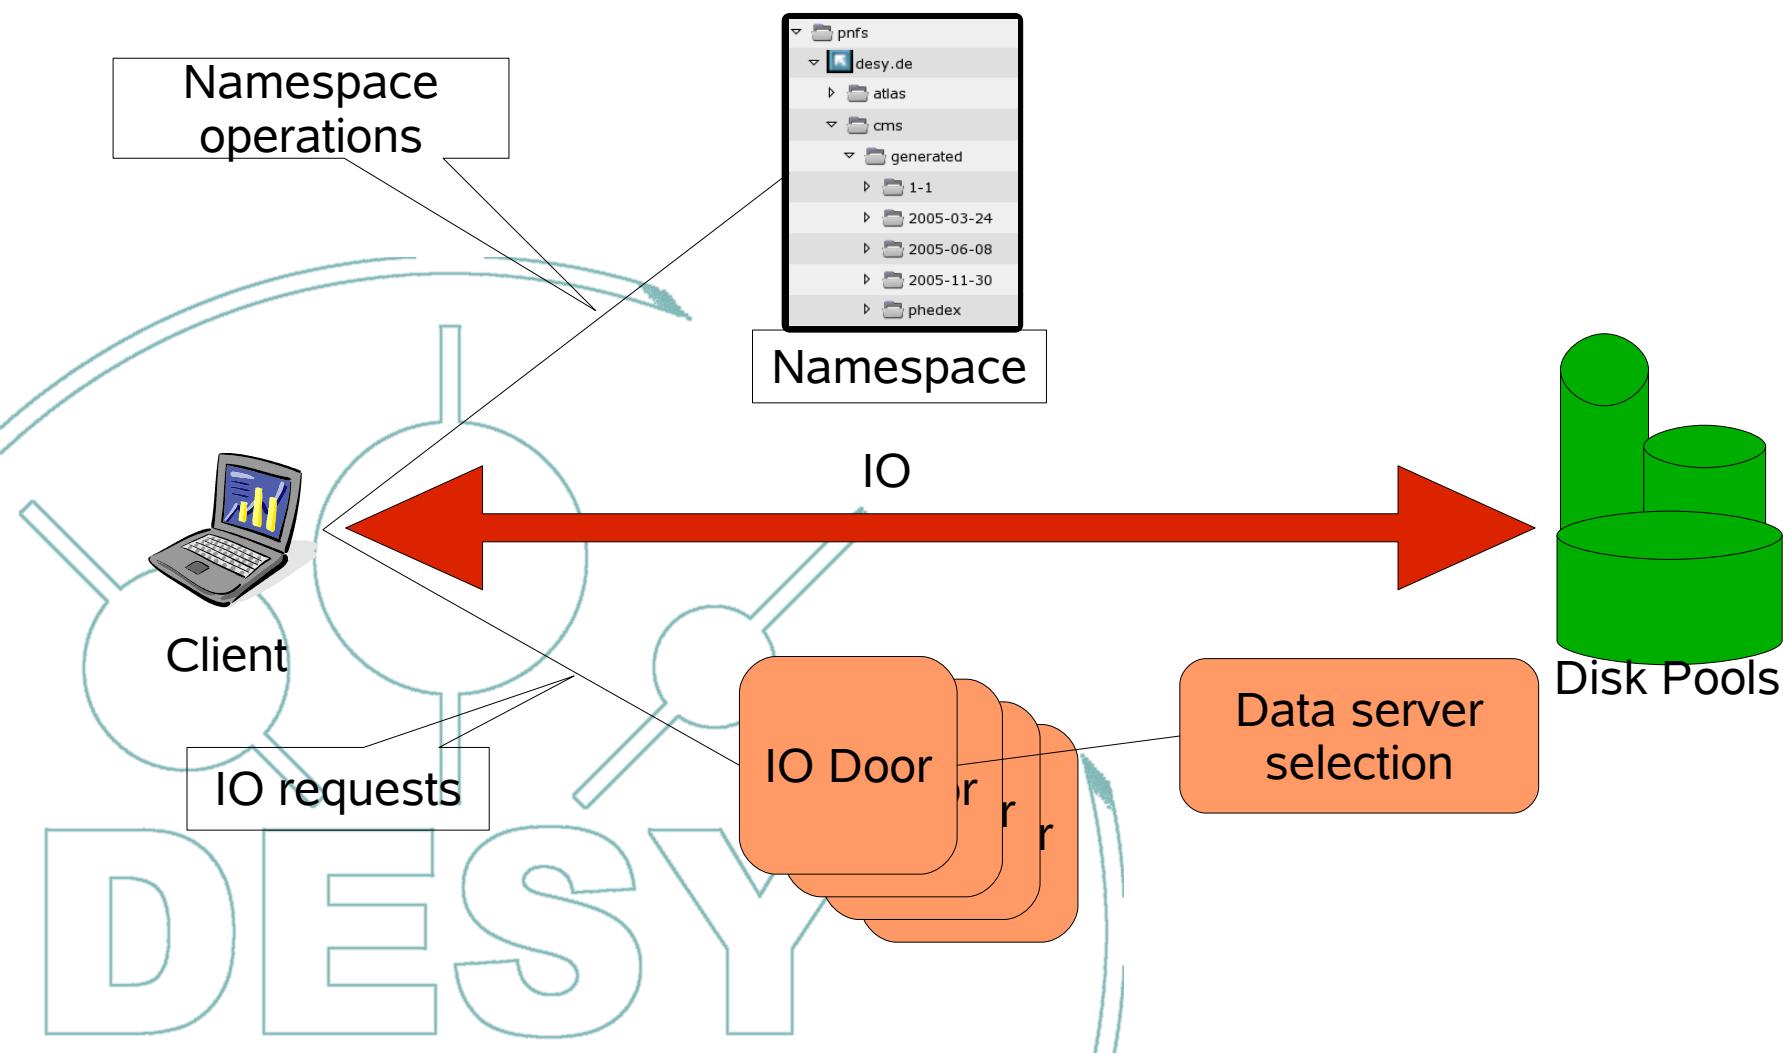

dCache Design


- Pools are grouped into PoolGroups
- PoolGroup selected by flow direction, 'path'(file set), protocol and client IP
- Pool selected by **cost**, where cost is

$$n * \langle \text{CPU cost} \rangle + m * \langle \text{space cost} \rangle$$


n=1, m=0 : fill network bandwidth first
n=0, m=1 : fill empty servers first




MSS connectivity

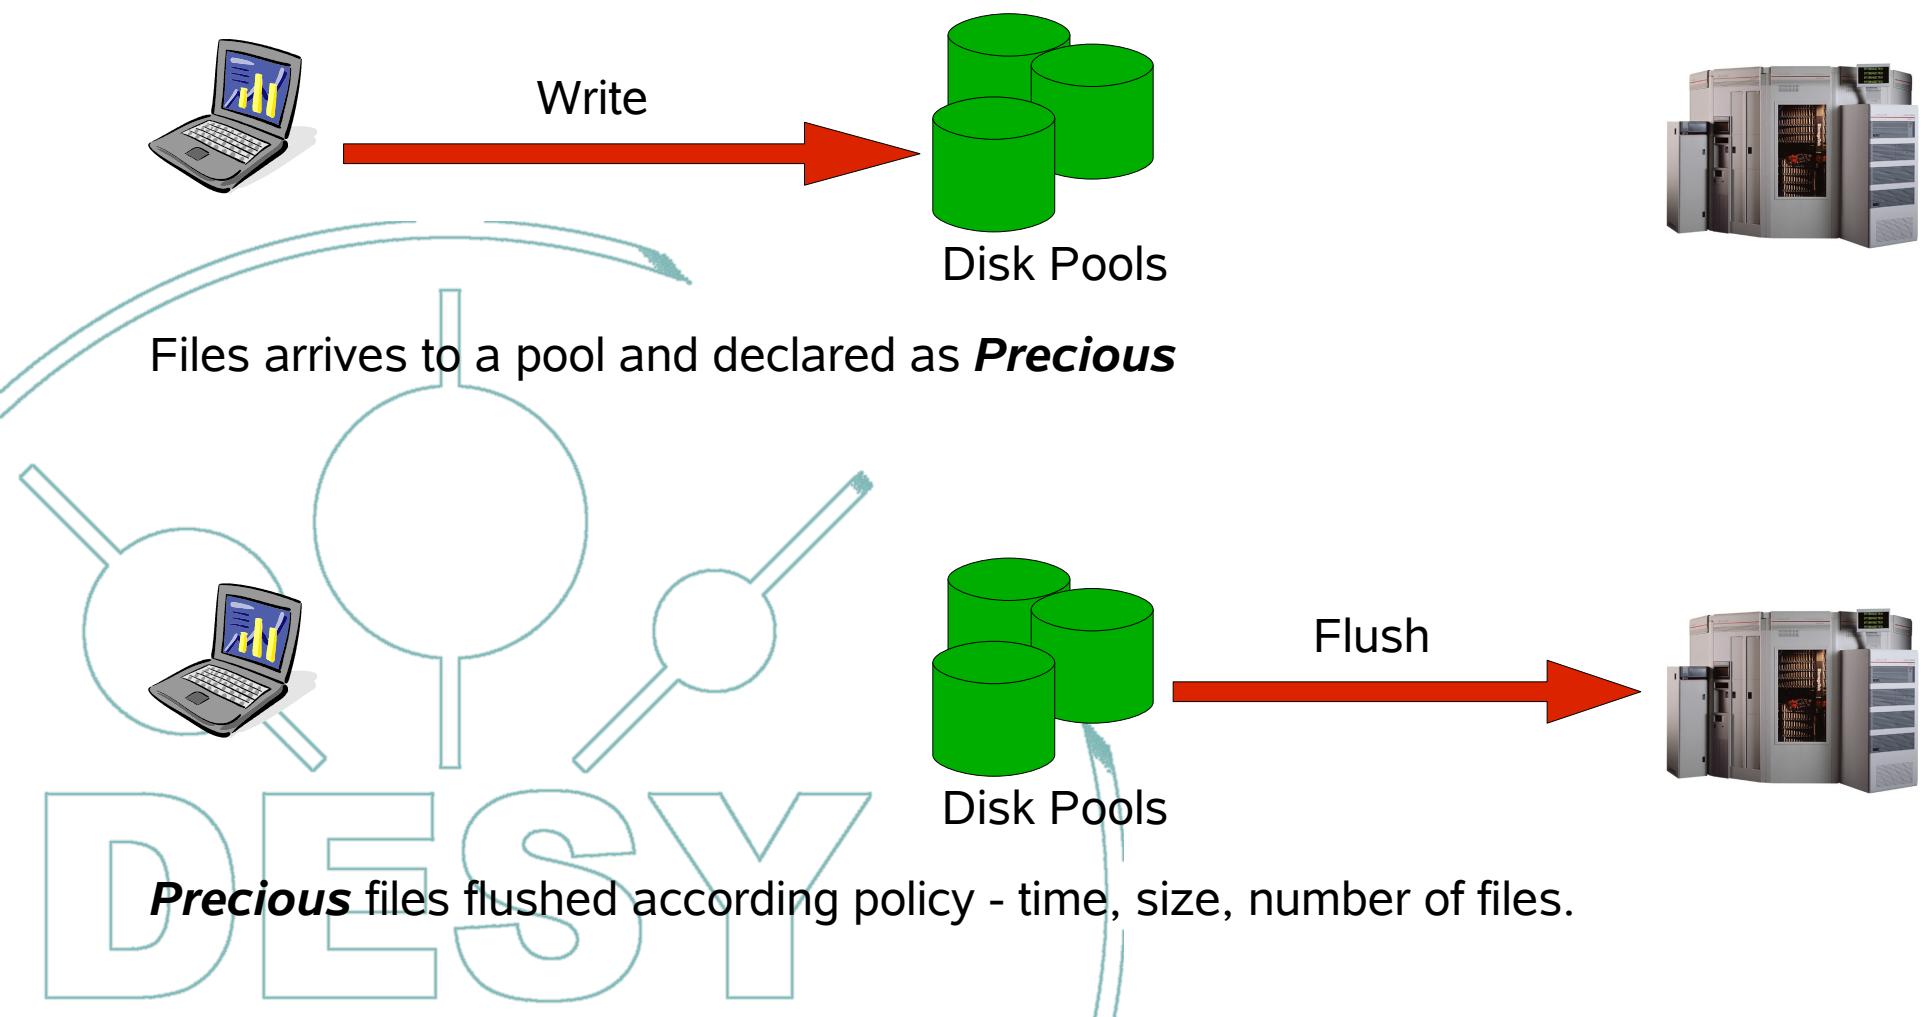

MSS connectivity

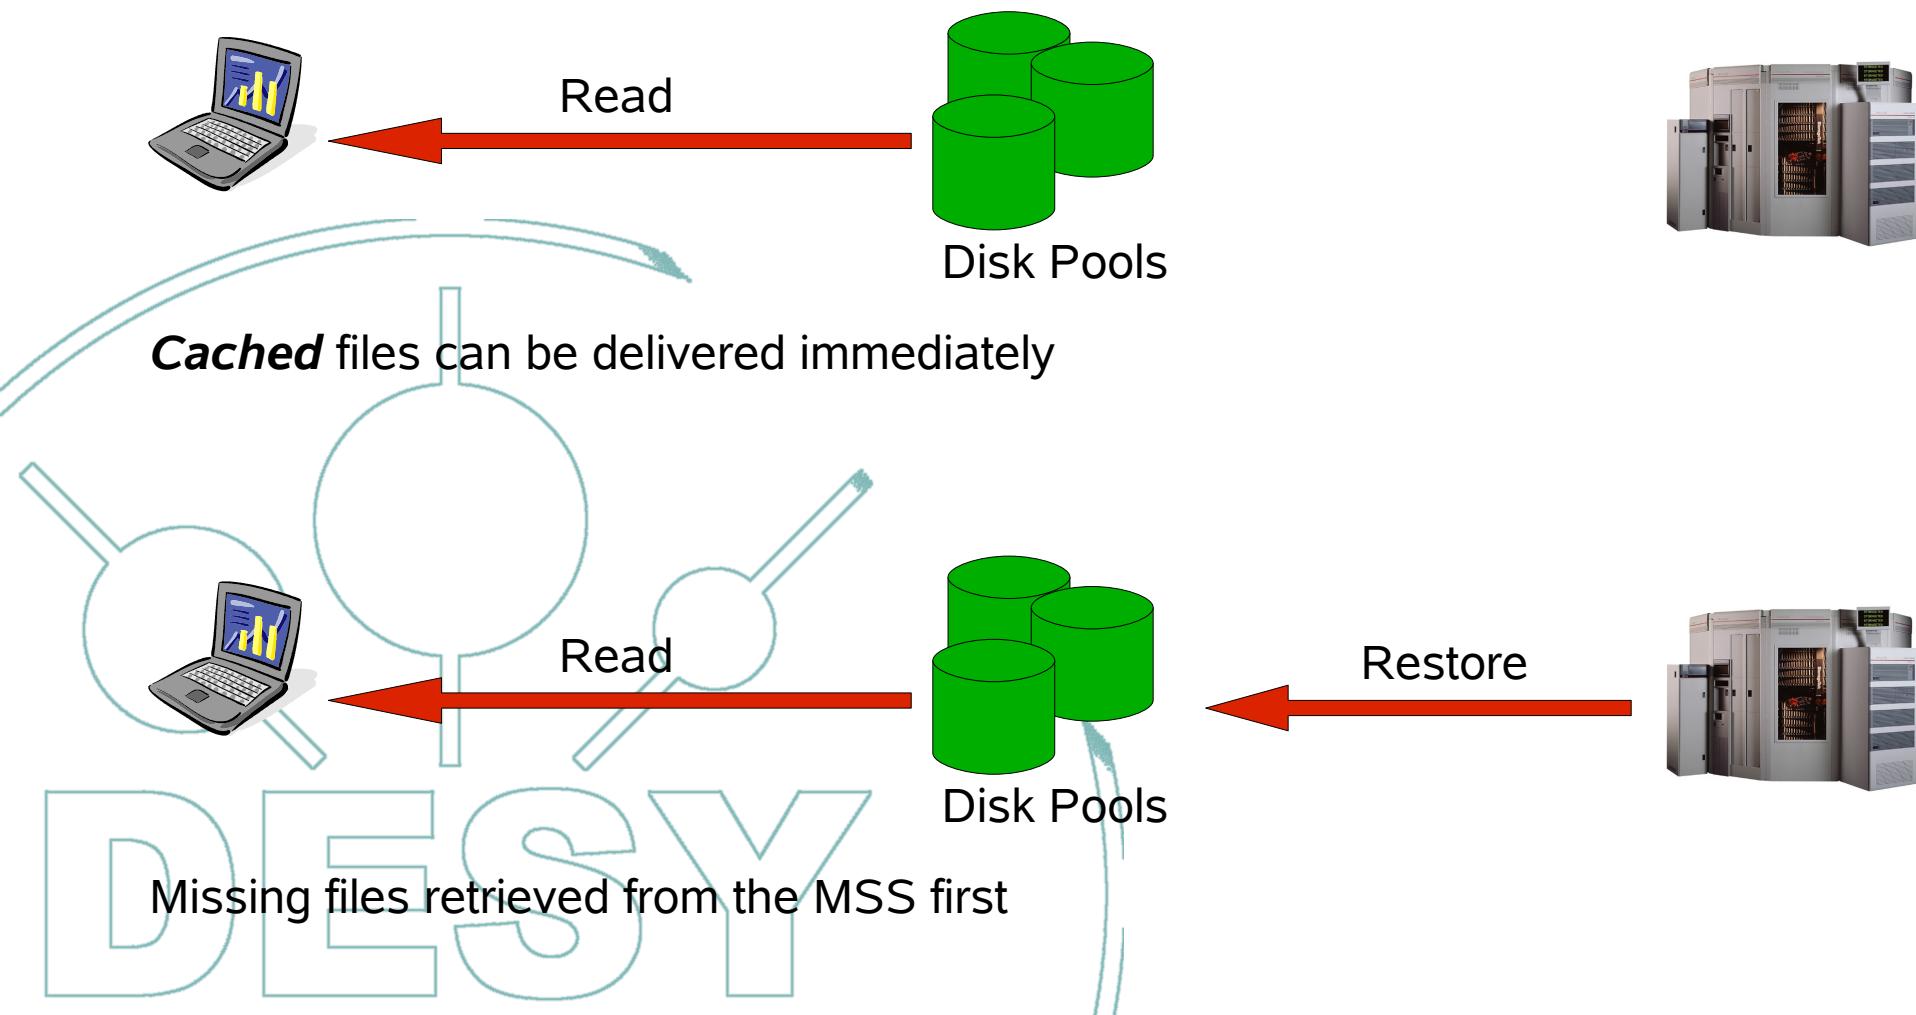


MSS connectivity

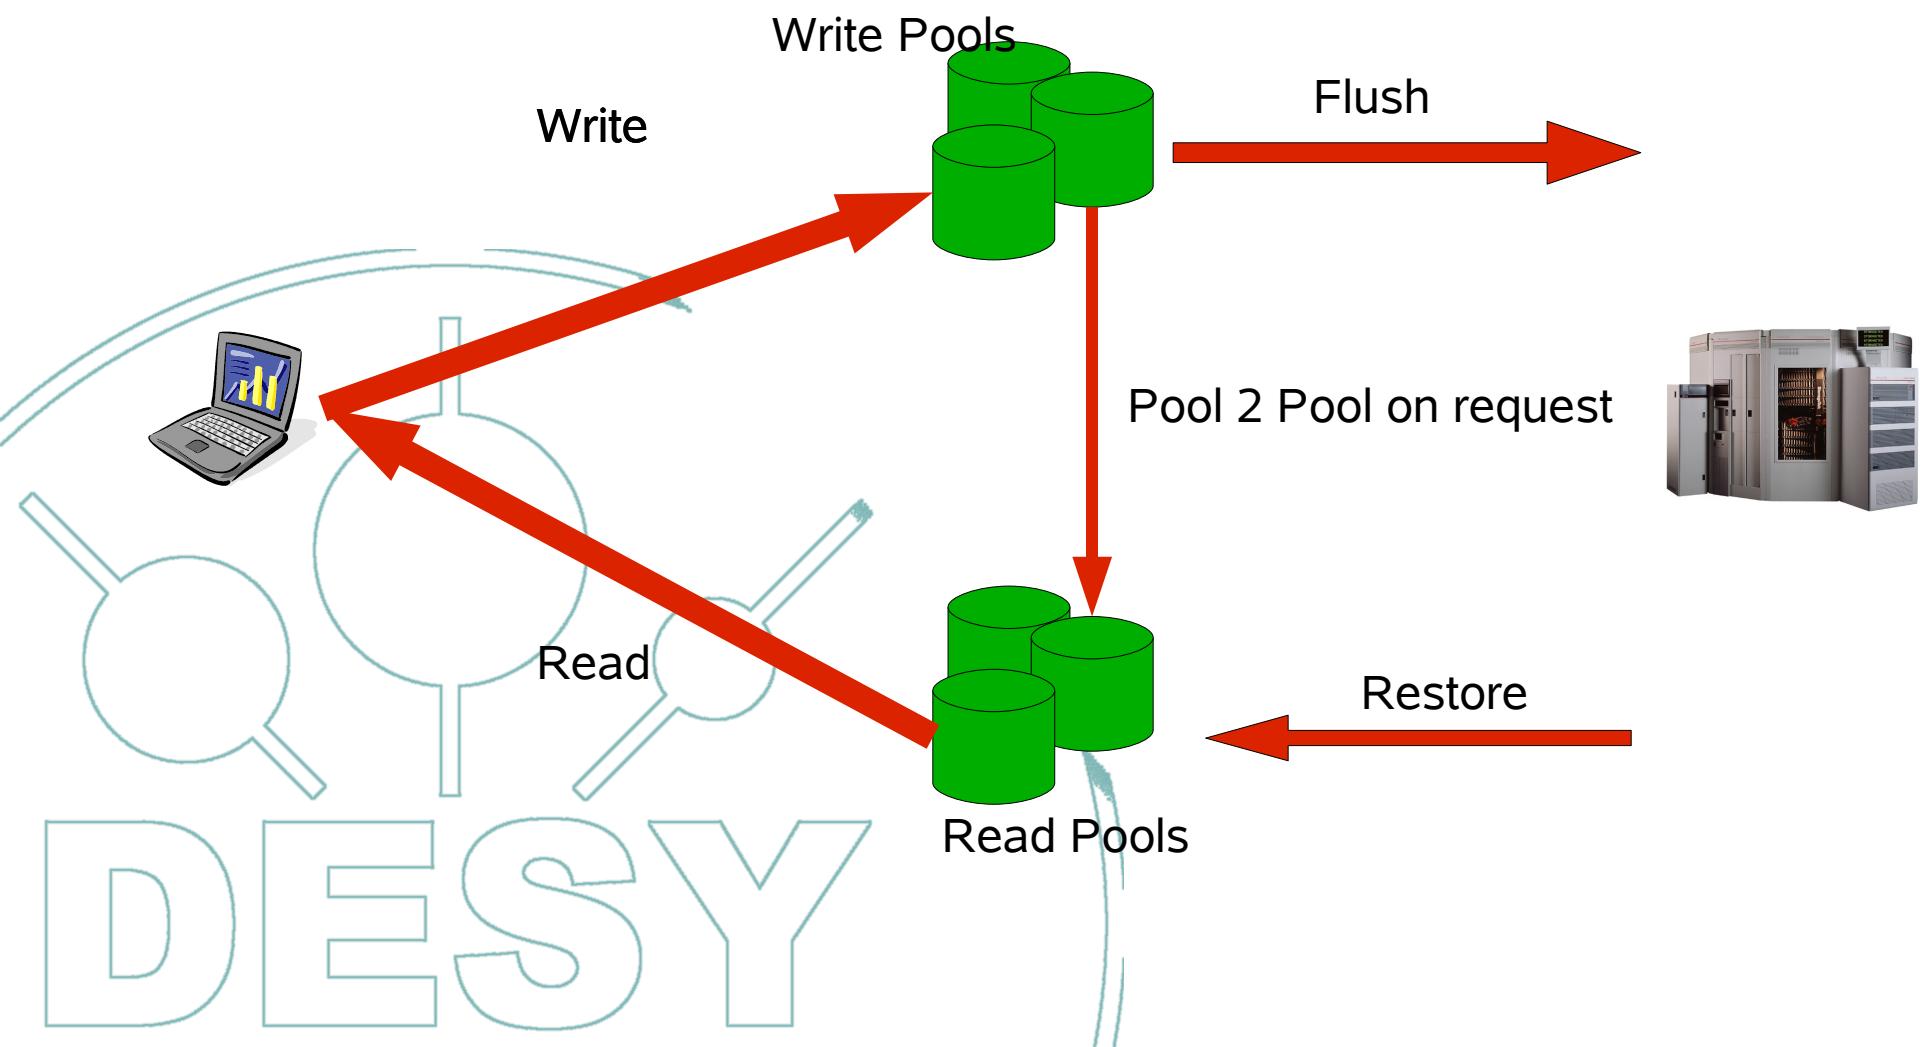

Current Status

- dCache let us build very large (capacity and bandwidth wise) storage system with small, independent building blocks
- building block need to provide:
 - JVM >= 1.5 (all components are Java based)
 - local filesystem
 - network Interface


no IO penalty while using Java

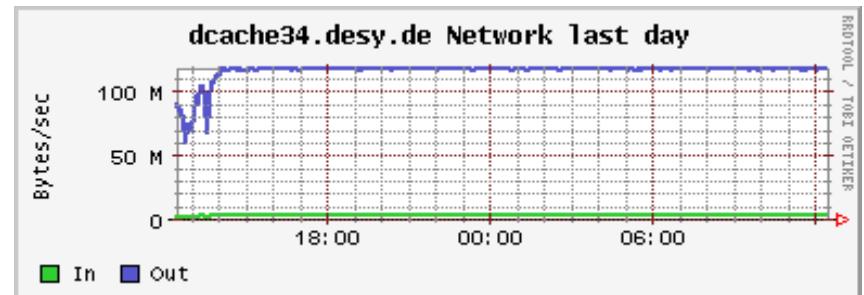

Current Status

- Project started June of 2000 as a join effort of DESY and FNAL
- First prototype April 2001
- In Production since March 2002
- Supported local access Protocols: dcap, xrootd
- Supported WAN access Protocols: ftp, http
- Deployed on AIX, Linux (x86, Power, x64), Solaris (Sparc, AMD)
- Run over country border
- Has an interface to OSM, Enstore, HPSS , TSM, DMF
 - easy to add any other MSS
- Largest Installation 2PB (FNAL)
- ~1800 pools
- ~1.2 GB/s WAN (Peak rate – 2.5 GB/s!)
- 60 TB/day read (100000 files!)
- 2 TB/day write (8000 files)

Current Status (NorduGrid)

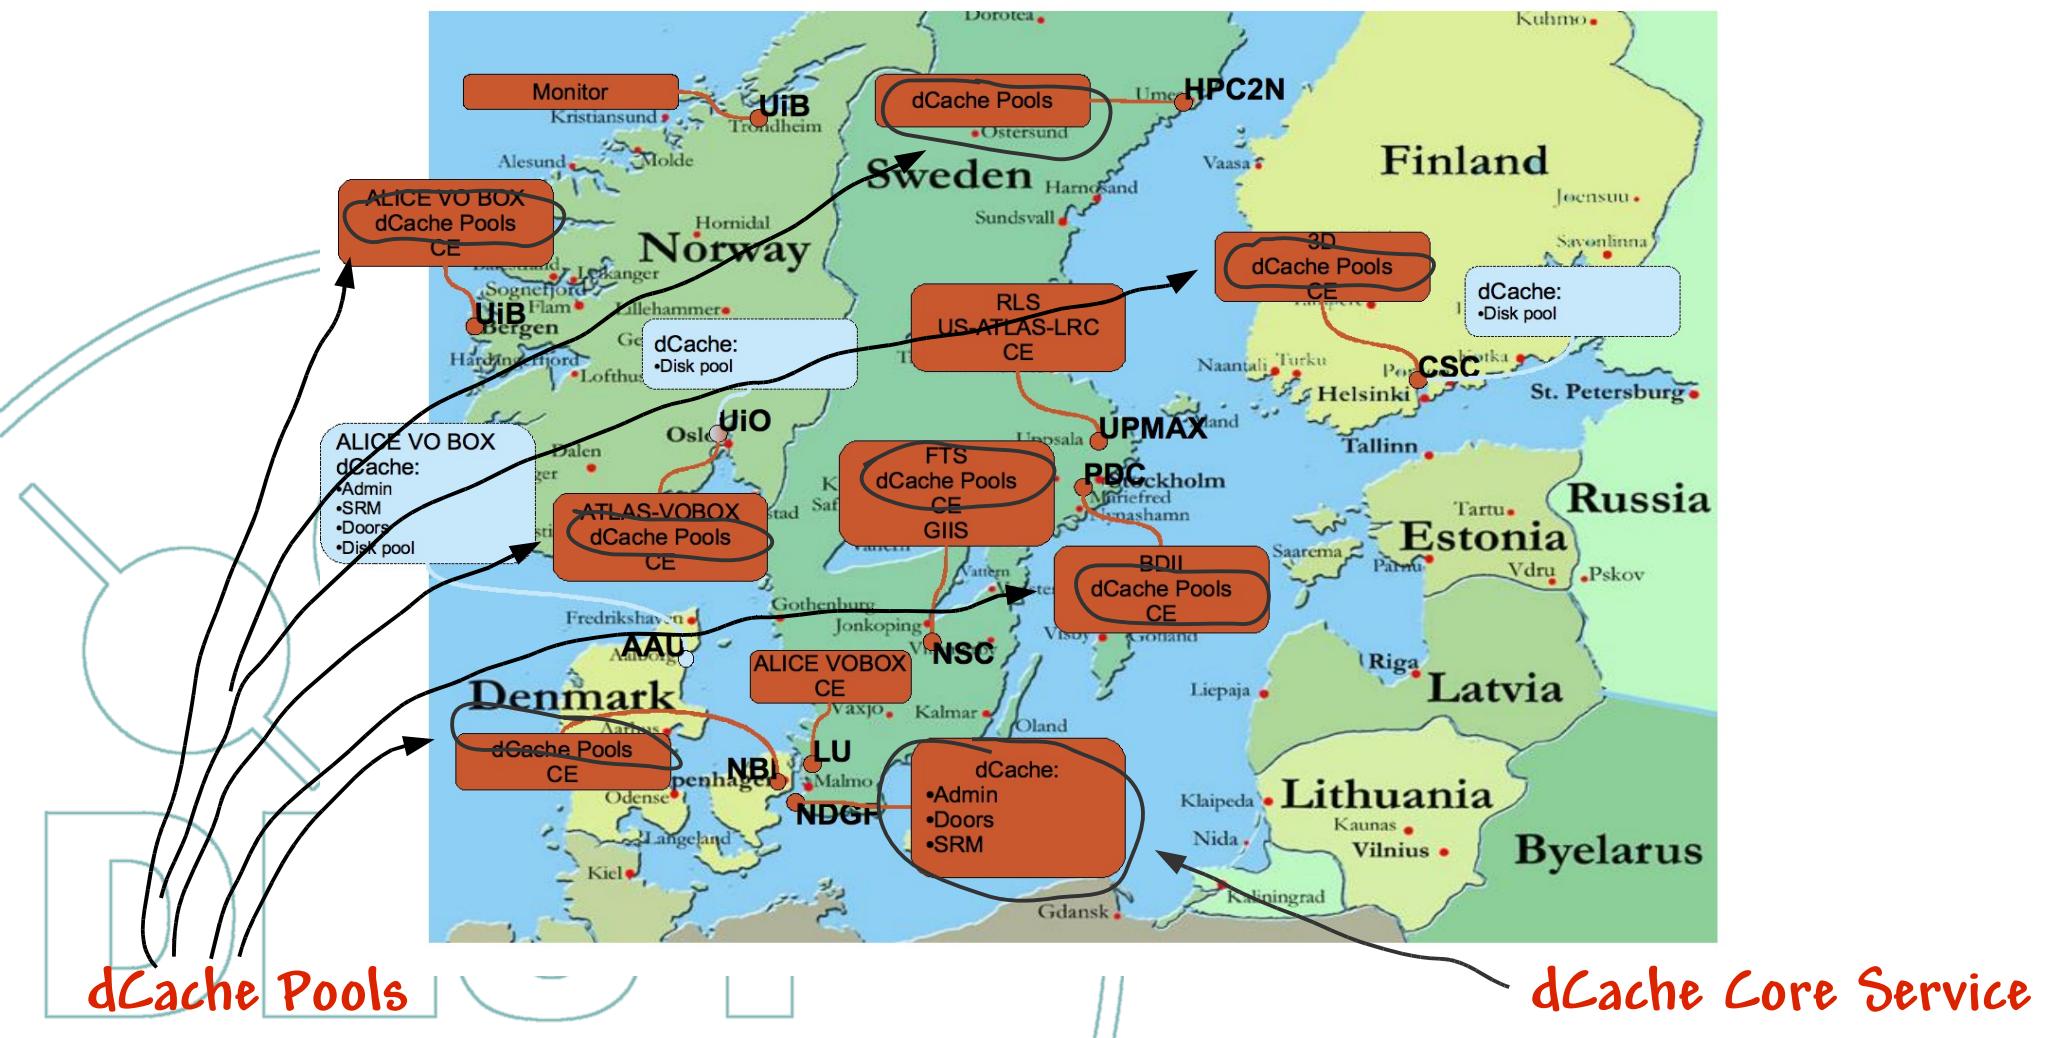

Pnfs != pNFS


The dCache's **Namespace** provider called Pnfs:

Perfectly Normal File System

developed in 1997 and currently in replacement.



Uniform Data Access

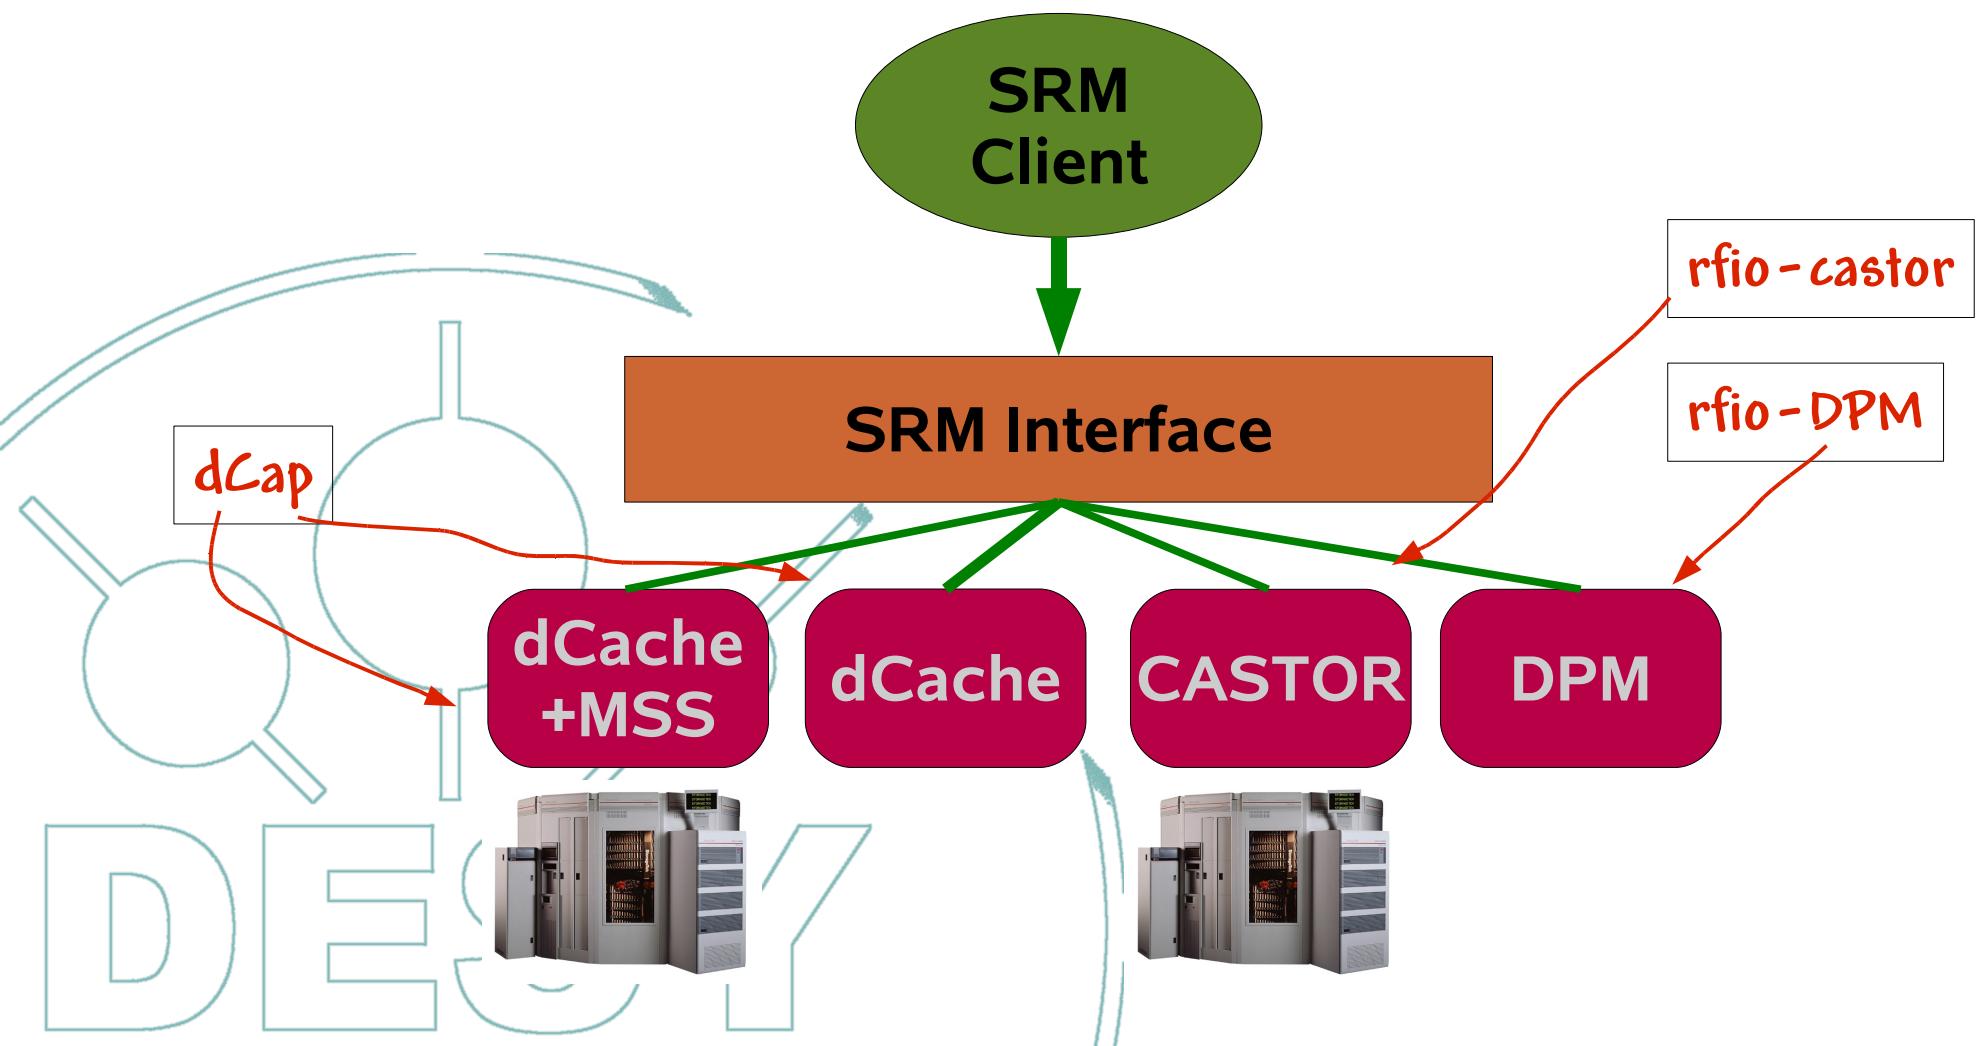


Why new protocols

- There are three 'popular' protocols used in High Energy Physics:
 - dCap – dCache Access Protocol
 - rfio – Remote File IO
 - xroot – eXtended ROOT IO
- all protocols were designed, while NFSv2/3 was not distributed
- existing distributed solutions did not fit well
 - and expensive (all of them)
 - and require special hardware
 - or require special OS/kernel versions




NFSv4.1

- fit well to dCache (and others) architecture
- Open Standard Protocol supported by industry NFSv4.1
- Client comes 'for free' with Operating System

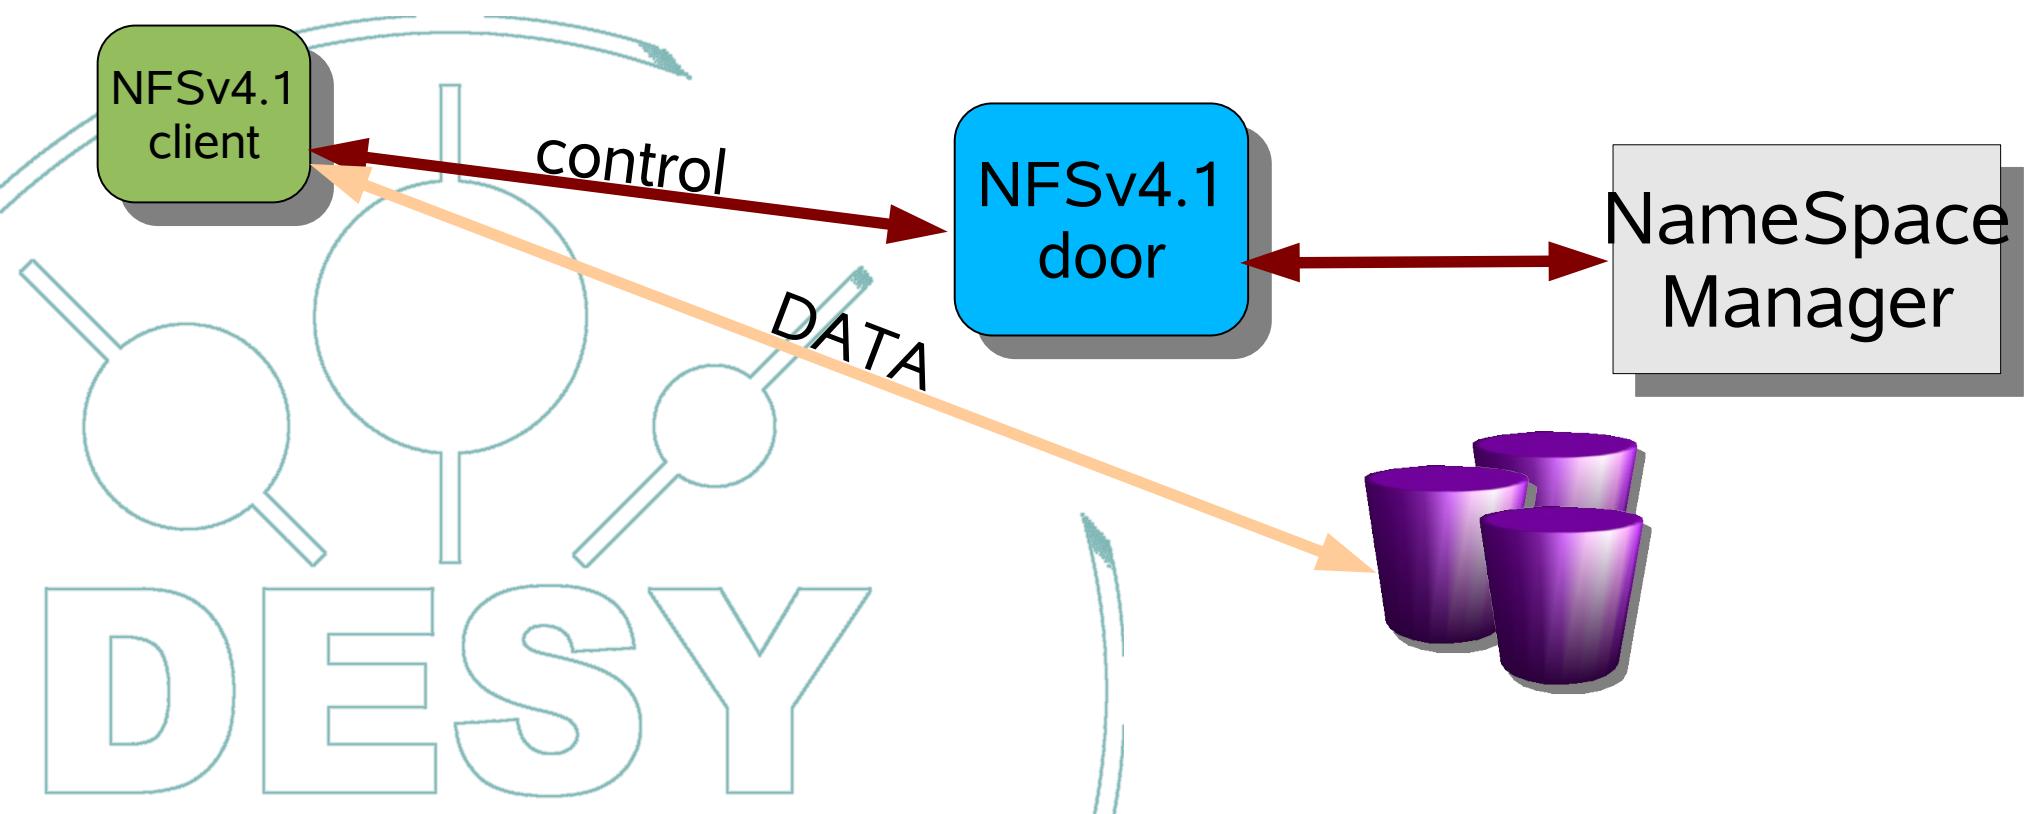

The Vision:


Need It!

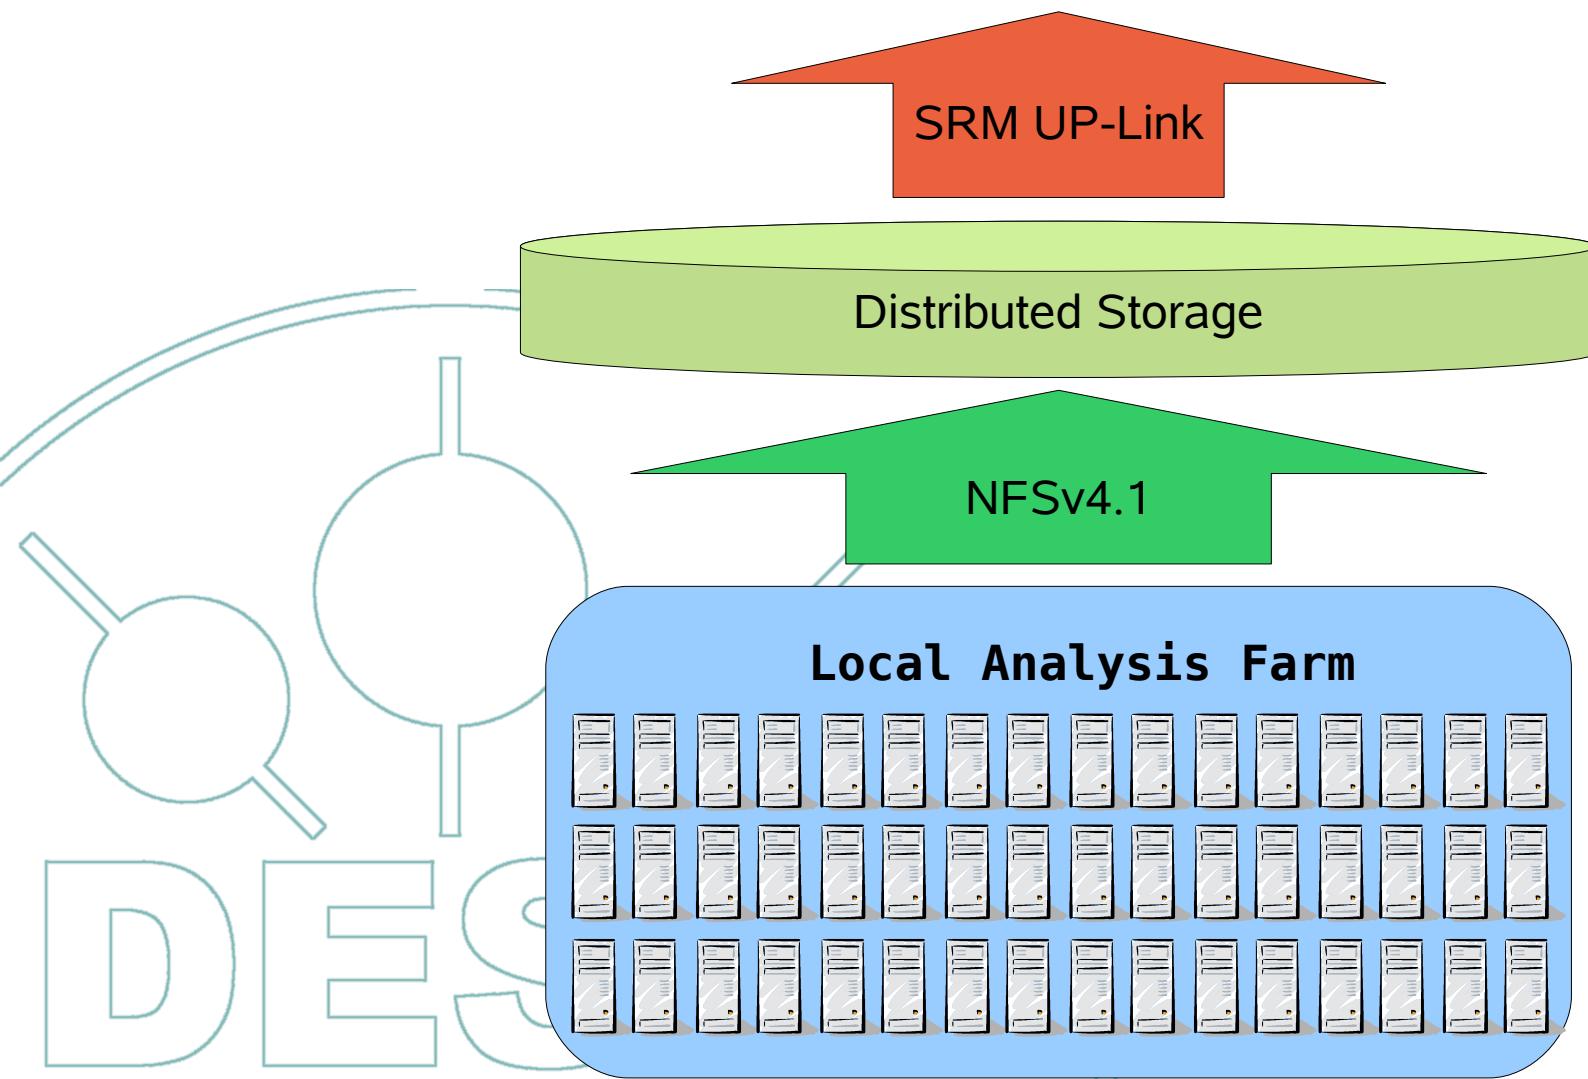

References:

- www.dCache.ORG
- SRM V2.2 spec. <http://sdm.lbl.gov/srm-wg/doc/SRM.v2.2.html>
- NFSv4.1 spec. <http://www.nfsv4-editor.org/>

Special Tanks to:

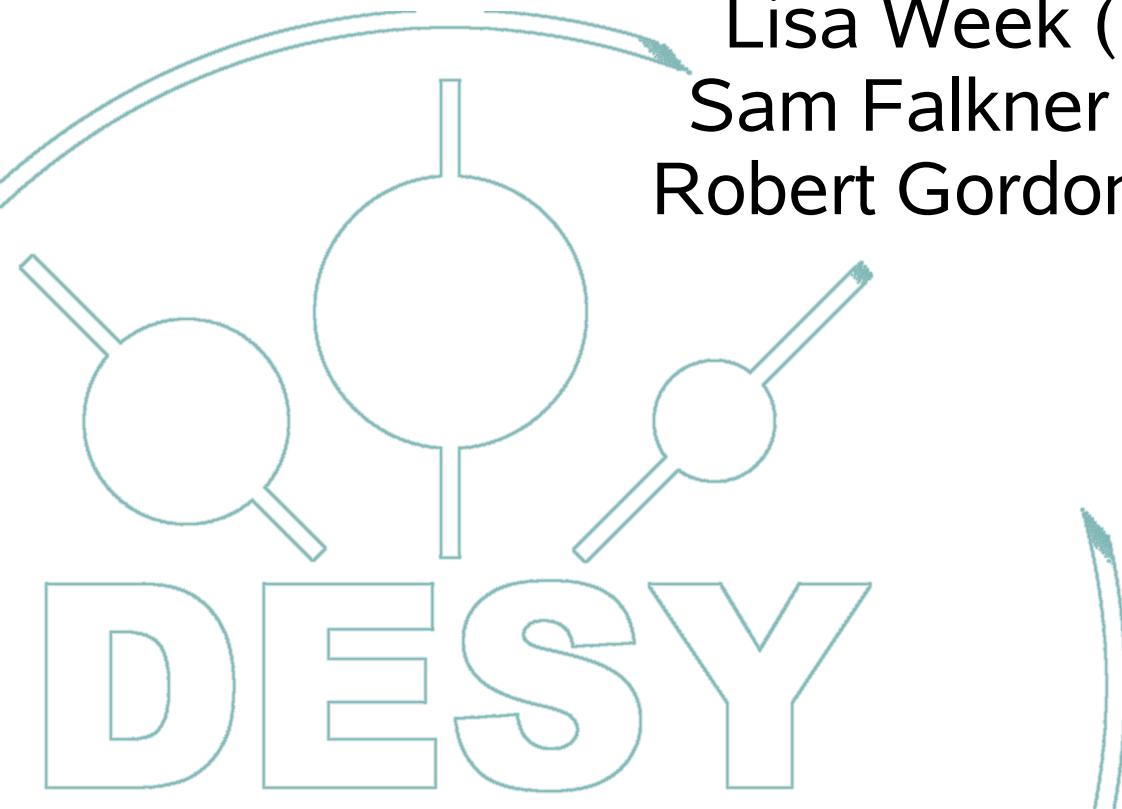The logo features the word "DESY" in a large, bold, sans-serif font. Above the letters "E" and "S", there are three magnifying glasses arranged in a triangular pattern, all pointing towards the center. A curved teal arrow starts from the top right, points down to the left, then turns up to point at the name "Andy Adamson".

Andy Adamson (CITI)
Benny Halevy (Panasas)
Lisa Week (SUN)
Sam Falkner (SUN)
Robert Gordon (SUN)