



**SS INTERNATIONAL**


Built to Seal. Designed to Last.

# COMPANY PROFILE



Engineering  
Manufacturing  
Applications



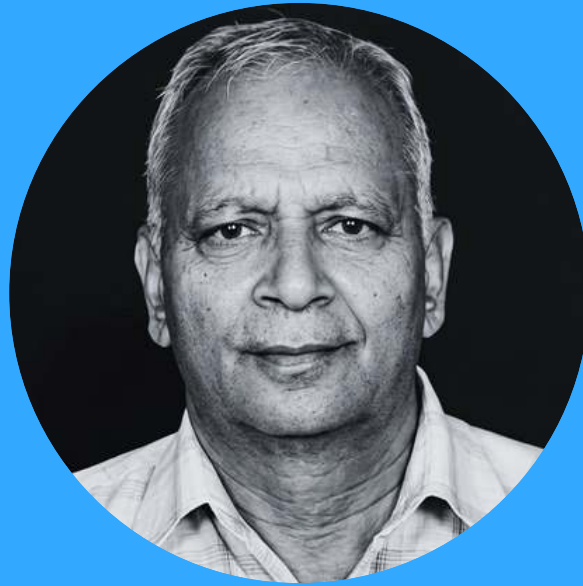

**LATE. MR. SURESH CHANDRA BANSAL**

*Founder*

---

*"The true value of a product is not measured  
on the day it is delivered.*

*It is measured months and years later when it  
continues to perform as expected, when it solves the  
problem it was designed for, and when the customer  
never has to think about it again.*

*That quiet reliability is what we strive to build into  
everything we manufacture."*

# ABOUT US

SS International is a leading manufacturer of engineered rubber and PVC solutions with over 25 years of industry experience. Since our inception, we have built our reputation on technical expertise, manufacturing excellence, and a commitment to delivering reliable solutions for diverse industrial applications.

Driven by innovation and continuous improvement, we work closely with customers to develop application-specific solutions that address complex engineering challenges while ensuring long-term reliability, efficiency, and value.



**Engineered for Demanding Applications.  
Manufactured for Lasting Performance.**

**25+ Years**

Manufacturing Expertise

**300+**

Customers Served  
Across India

**8**

Industries Served

**In-House  
Operations**

End-to-End Manufacturing  
Under One Roof

**5000+**

Profiles Developed  
& Manufactured

# COMPANY MISSION

To deliver precision-engineered rubber sealing solutions that solve real engineering challenges through advanced materials, proprietary technology, and an uncompromising commitment to quality at every stage of production.



## COMPANY VISION

To reduce India's dependence on European sealing suppliers by building globally competitive products, driven by indigenous innovation, that set new benchmarks for quality, performance, and reliability.

“

Our mission and vision are driven by a commitment to engineering reliable solutions, advancing indigenous manufacturing capabilities, and setting new benchmarks for performance, consistency, and trust.





# CORE VALUES



## Precision

---

Engineered to exact standards. Precision isn't a goal it's our baseline.



## Reliability

---

Built for industries where failure isn't an option. Consistency at every stage.



## Innovation

---

Driven by continuous R&D in materials, technology, and processes to solve complex challenges.

# WHY CHOOSE SS INTERNATIONAL

- Custom Compound Development
- Multi-Industry Application Expertise
- Compliance with DIN, BS, ISO, EN & ASTM Standards
- Complete Manufacturing Under One Roof
- In-House Testing & Validation

“

**Global  
Standards.  
Indian  
Roots.**

## QUALITY & CERTIFICATIONS



IATF 16942:2016  
Automotive from BSI



ISO 14001:2015  
Environment Management



ISO 45001:2018  
EHealth & Safety Management



ZED Gold certified



# TECHNOLOGIES & MANUFACTURING CAPABILITIES



**Precision in Process. Consistency in Performance.**

At SS International, manufacturing excellence extends beyond machinery it is driven by material science, process engineering, and decades of industry expertise.

By combining proven manufacturing practices with continuous product innovation, we deliver products that consistently meet demanding requirements for sealing, insulation, vibration dampening, weather resistance, fire retardancy, durability, and long-term performance.


# PROFILE DESIGN AND TOOL DEVELOPMENT

Our design and development capability is what sets us apart the ability to take a customer's application requirement and translate it into a rubber profile that fits, seals, and lasts. End-to-end, in-house.

01

## Profile Design

Customer requirements translated into precise profile geometries using CAD tooling, before die manufacturing begins.

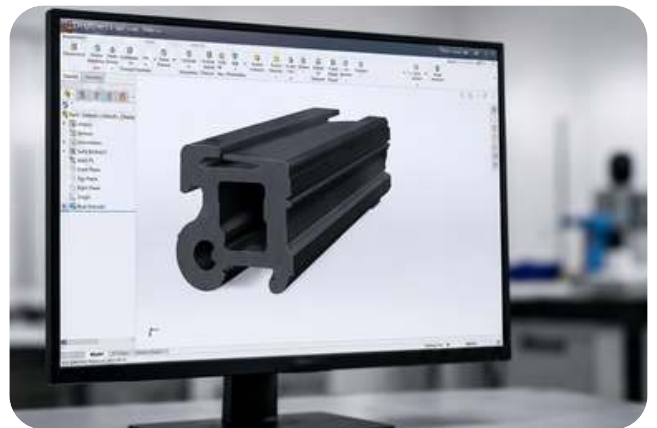

02

## Material Development

Compound formulation developed in parallel with profile design material properties matched to application demands from day one.



03

## Fitment Validation

Prototype profiles tested against customer fitment conditions. Dimensional accuracy, compression force, sealing performance verified before production release.





# MATERIAL DEVELOPMENT

Material selection is the foundation of product performance. Our expertise spans a broad range of elastomers, including EPDM, Natural Rubber, Nitrile (NBR), Silicone, and Neoprene, as well as rigid and flexible PVC formulations. This enables us to engineer solutions tailored to specific environmental, mechanical, and operational requirements.

“  
Manufacturing Excellence Begins with Custom In-House Compounding.

| PROPERTIES            |                           | NATURAL RUBBER | EPDM       | NBR        | SILICONE    | NEOPRENE     |           |
|-----------------------|---------------------------|----------------|------------|------------|-------------|--------------|-----------|
| Tensile Strength      | Pure Gum                  | Over 3,000     | Over 3,000 | Over 1,000 | Below 1,500 | Over 3,000   |           |
| (PSI)                 | Black Loaded              | Over 3,000     | Over 3,000 | Over 2,000 |             | Over 3,000   |           |
| Hardness Range        | (Shore A)                 | 30-90          | 40-90      | 40-96      | 40-85       | 40-95        |           |
| Specific Gravity      | Base Material             | 0.93           | 0.85       | 1.00       |             | 1.23         |           |
| Adhesion to Metal     |                           | Excellent      | Good       | Excellent  |             | Excellent    |           |
| Tear Resistance       |                           | Good           | Good       | Fair       | Poor        | Good         |           |
| Abrasion Resistance   |                           | Excellent      | Good       | Good       | Poor        | Excellent    |           |
| Compression Set       |                           | Good           | Good       | Good       | Fair        | Fair         |           |
| Rebound               | Cold                      | Excellent      | Good       | Good       | Excellent   | Very Good    |           |
|                       | Hot                       | Excellent      | Good       | Good       | Excellent   | Very Good    |           |
| Directrun Strength    |                           | Excellent      | Excellent  | Poor       | Good        | Good         |           |
| Electrical Insulation |                           | Good           | Excellent  | Poor       | Excellent   | Fair         |           |
| Permeability to Gases |                           | Fair           | Poor       | Fair       | Fair        | Low          |           |
| Acid Resistance       |                           | Fair           | Good       | Good       | Excellent   | Good         |           |
|                       | Aliphatics                | Poor           | Poor       | Excellent  | Poor        | Good         |           |
| SOLVENT RESISTANCE    | Aromatics                 | Poor           | Poor       | Good       | Poor        | Fair         |           |
|                       | Ketones                   | Good           | Good       | Poor       | Fair        | Poor         |           |
|                       | Lacquer                   | Poor           | Poor       | Fair       | Poor        | Poor         |           |
| RESISTANCE TO         | Swelll in Lubricating Oil |                | Poor       | Poor       | Very Good   | Fair         | Good      |
|                       | Oil & Gasoline            |                | Poor       | Poor       | Excellent   | Fair         | Good      |
|                       | Animal & Vegetable Oils   |                | Poor       | Good       | Excellent   | Fair         | Good      |
|                       | Water Absorption          |                | Very Good  | Good       | Fair        | Good         | Good      |
|                       | Oxidation                 |                | Good       | Excellent  | Good        | Excellent    | Excellent |
|                       | Ozone                     |                | Fair       | Excellent  | Fair        | Excellent    | Excellent |
|                       | Sunlingt Aging            |                | Poor       | Excellent  | Poor        | Excellent    | Very Good |
|                       | Heat Aging                |                | Good       | Excellent  | Excellent   | Out Standing | Excellent |
|                       | Flame                     |                | Poor       | Poor       | Poor        | Fair         | Good      |
|                       | Heat                      |                | Good       | Excellent  | Excellent   | Excellent    | Excellent |
|                       | Cold                      |                | Excellent  | Excellent  | Good        | Excellent    | Good      |

# UHF CURING

We utilize an advanced continuous vulcanization process that combines Ultra High Frequency (UHF) microwave curing, Infrared (IR) heating, and controlled Hot Air vulcanization. This integrated approach ensures uniform heat distribution throughout the profile, resulting in consistent curing, superior dimensional stability, and enhanced physical properties.

We utilize an advanced continuous vulcanization process that combines Ultra High Frequency (UHF) microwave curing, Infrared (IR) heating, and controlled Hot Air vulcanization. This integrated approach ensures uniform heat distribution throughout the profile, resulting in consistent curing, superior dimensional stability, and enhanced physical properties.

## KEY CAPABILITIES

Uniform Curing Throughout the Profile Cross-Section

Superior Dimensional Stability & Consistency

Enhanced Mechanical & Physical Properties

Excellent Resistance to Ozone, UV & Weathering

Reliable Performance Across Wide Temperature Ranges

Superior Dimensional Stability & Consistency



# ONLINE FLOCKING

We offer in-house online flocking capabilities for rubber profiles used in dynamic sealing applications. Through a dedicated flocking process, a uniform layer of precision fibres is applied to selected profile surfaces, creating a low-friction interface between rubber, glass, and metal components.

Commonly used in glass run channels, window systems, and automotive sealing applications, flocked profiles enable smoother movement, reduced operating noise, improved wear resistance, and enhanced user comfort. Our controlled flocking process ensures consistent fibre adhesion, uniform surface finish, and reliable long-term performance.

“

The end product delivered by our state-of-the-art flocking machine.






# FIRE RETARDANT PROFILES

In enclosed environments such as trains, metros, underground transit systems, and industrial facilities, the behaviour of materials during a fire can be the difference between life and death. Our fire-retardant rubber profiles are manufactured to **EN 45545 – HL2/HL3**, one of the most stringent railway fire safety standards in use globally.

These profiles are engineered for applications where safety certification is not a preference but is a prerequisite. Developed to meet demanding fire performance requirements, they provide a reliable solution for environments where passenger safety, regulatory compliance, and material integrity are of critical importance.

## OUR PRODUCTS MEET **FLAME RESISTANCE STANDARD**

- ✓ **FLAME RESISTANCE**
- ✓ **PASSANGER SAFETY**
- ✓ **EN 45545 COMPLIANCE**
- ✓ **EN 45545 COMPLIANCE**

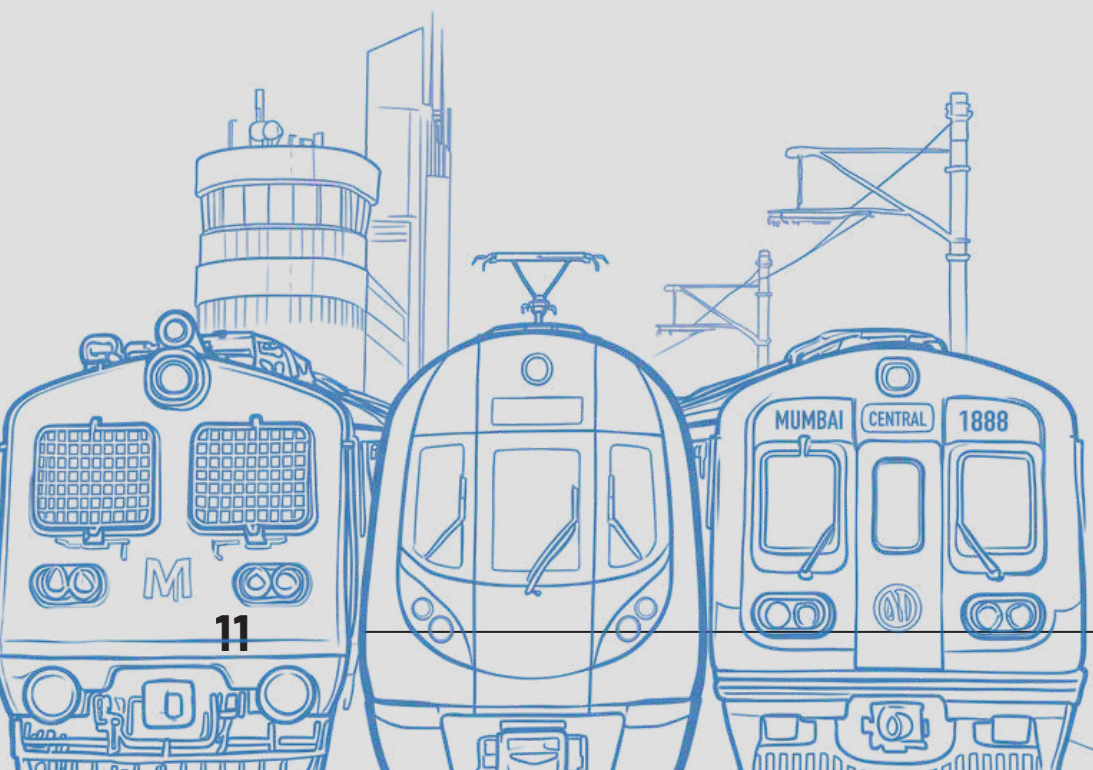

“

When Safety Is  
Non-Negotiable.

# QUALITY CONTROL & VALIDATION

Quality is built into every stage of our manufacturing process. Our in-house testing and validation capabilities enable end-to-end material traceability, batch-to-batch consistency, and compliance with applicable ASTM, IS, BIS, ISO, customer, and project-specific requirements, ensuring reliable performance in demanding applications.



DENSITY TESTER



COMPRESSION SET



ASH CONTENT TESTER



RHEOMETER



UTM



MOONY VISCOMETER  
TESTER



AGEING OVEN



MOISTURE ANALYZER



SHORE A HARDNESS  
TESTER



OPTICAL PROFILE  
PROJECTOR

## QUALITY ASSURANCE



UL 94 V-0



# INDUSTRIES



**A Complete Range. Engineered  
for Every Industry.**

Our sealing solutions operate in conditions that demand absolute reliability. Extreme heat. Constant vibration. Outdoor weathering. Chemical exposure.

We engineer for all of it so that the industries our clients build can keep moving without interruption.





AUTOMOTIVE



ARCHITECTURE



INFRASTRUCTURE



MINING





ROADWAYS



RAILWAYS  
& MASS TRANSIT



POWER  
DISTRIBUTION



SHIPPING

# COMPANY PRODUCTS



**A Complete Range.  
Engineered for Every Application.**

Our product portfolio spans 17 categories of rubber profiles, each developed for specific industries and applications. Every profile is available in custom cross-sections, compounds, and hardness grades to meet your exact design requirements.





**ARCHITECTURAL PROFILES**



**AUTOMOTIVE PROFILES**



**BUS BODY PROFILES**



**RAILWAY PROFILES**



**CONTAINER SEAL**




**CO-EXTRUDED PROFILES**



**EDGE PROTECTORS**



**ELECTRICAL PANEL PROFILE**

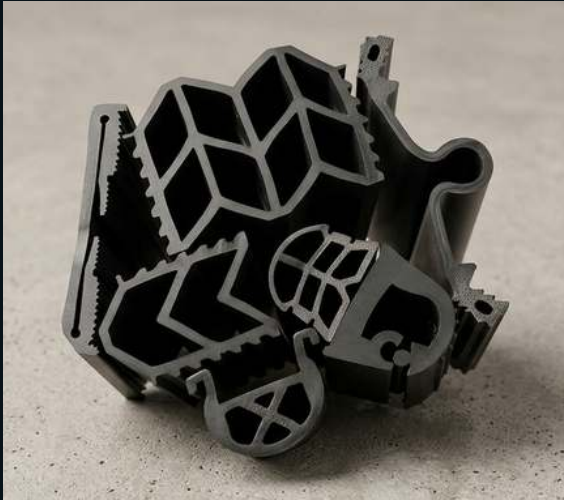

**EXPANSION JOINTS**



**FLOCKED GLASS RUN CHANNEL**



**MISCELLANEOUS PROFILES**



**MOLDED CORNER**





**SPONGE RUBBER PROFILES**



**SPONGE SOLID STRIPES  
PIPES CORDS**



**PIPE CLAMPING GASKET**



**SILICON RUBBER PROFILE**



**WINDOW RUBBER PROFILES**



# SS INTERNATIONAL

Built to Seal. Designed to Last.



+91 9599399493  
+91 9213351121



[ssinternationalpolymers.com](https://ssinternationalpolymers.com)



[info@ssinternationalpolymers.com](mailto:info@ssinternationalpolymers.com)



C-24,25 UPSIDA, Baghpat Industrial  
Area, Baghpat, Uttar Pradesh - 250609

© 2026 SS International Industries LLP.  
All Rights Reserved.