POXVine :
Multi-Tenant Virtual Network Emulator

B.Tech. Project 2nd Stage Report

Submitted in partial fulfilment of the requirements for the degree of
Bachelor of Technology

Student:
Kausik Subramanian
Roll No: 110050003

Guide:
Purushottam Kulkarni

Department of Computer Science and Engineering
Indian Institute of Technology Bombay
Mumbai 400076, India

Abstract

Abstract   The advent of cloud computing and software defined networks
allows tenants to run huge and complex network topologies on shared in-
frastructure. We built a multi-tenant virtual network emulation application
POXVine using the POX controller which controls a network over Mininet.
In this report, we demonstrate the design and implementation of POXVine.

Acknowledgement

I wish to express my sincere gratitude and indebtedness to my guide, Purushottam Kulkarni and Umesh Bellur for their constant support and guidance throughout the project. I am also indebted to Martin Casado, whose talk on Software defined Networks at IIT Bombay inspired me to pursue research in the field.

Kausik Subramanian
B.Tech. IV
CSE, IIT Bombay

Contents

Chapter 1

Introduction

1.1 Software Defined Networks

Software defined Networks is an emerging architecture which provides a framework to manage network services through the abstraction of lower level functionality. In SDNs, the *control plane* which makes the decision of where to send traffic is decoupled from the *data plane*, which performs the actual forwarding of traffic. The advantages of SDN over traditional network architectures are listed below.

- *Central State* : The entire state of the network and name bindings exist in a central location, called the controller. All inputs from the network are passed to the controller, which decides the policy needs to be implemented.

- *Decoupled Control and Forwarding* : In SDNs, the control plane is separated from the data plane. The controller performs the route computation and push the forwarding rules to the switches. The switches perform the forwarding of packets.

- *Software Controller* : In SDNs, the controller is implemented in software, so can be modified to implement any kind of policy. The switches perform basic forwarding and expose a common API for the controller to talk to them. Because the control plane is in software, changes in network protocols and services are easier to implement without a major hardware overhaul.

1.2 POX

1.3 Network emulation using Mininet

Chapter 2

System Design

POXVine consists of three main components.

- The *host mapper* is responsible to map the virtual network entities (hosts and switches) onto the physical topology. This mapping can be done based on different heuristics, so POXVine allows you to customize the host mapper. We have developed a host mapper *MinSwitchMapper*, which tries to minimize the number of *physical switches* which contain rules to the virtual topology.

- The *network Mapper* is an application built over the *POX* controller which uses the *virtual-to-physical* mappings to add the required routing OpenFlow rules on the mininet switches, so that the virtual hosts can talk to one other. Another important design consideration is that the *virtual network abstraction* must be preserved, that is, if a packet is to flow across a route in the virtual topology, on the physical topology, it must traverse the virtual network entities in the same order.

- The *Mininet* infrastructure is used to emulate the physical network topology and the virtual hosts which are connected to the emulated physical switches (according to the *virtual-to-physical*) mappings).

I explain the individual components in the coming sections.

2.1 MinSwitchMapper

The host mapper module is responsible for finding the *virtual-to-physical* mappings of the virtual network entities, i.e on which physical hosts, the virtual hosts and switches are placed. This mapping can be done according to various considerations, like *maximizing number of virtual hosts, minimizing*
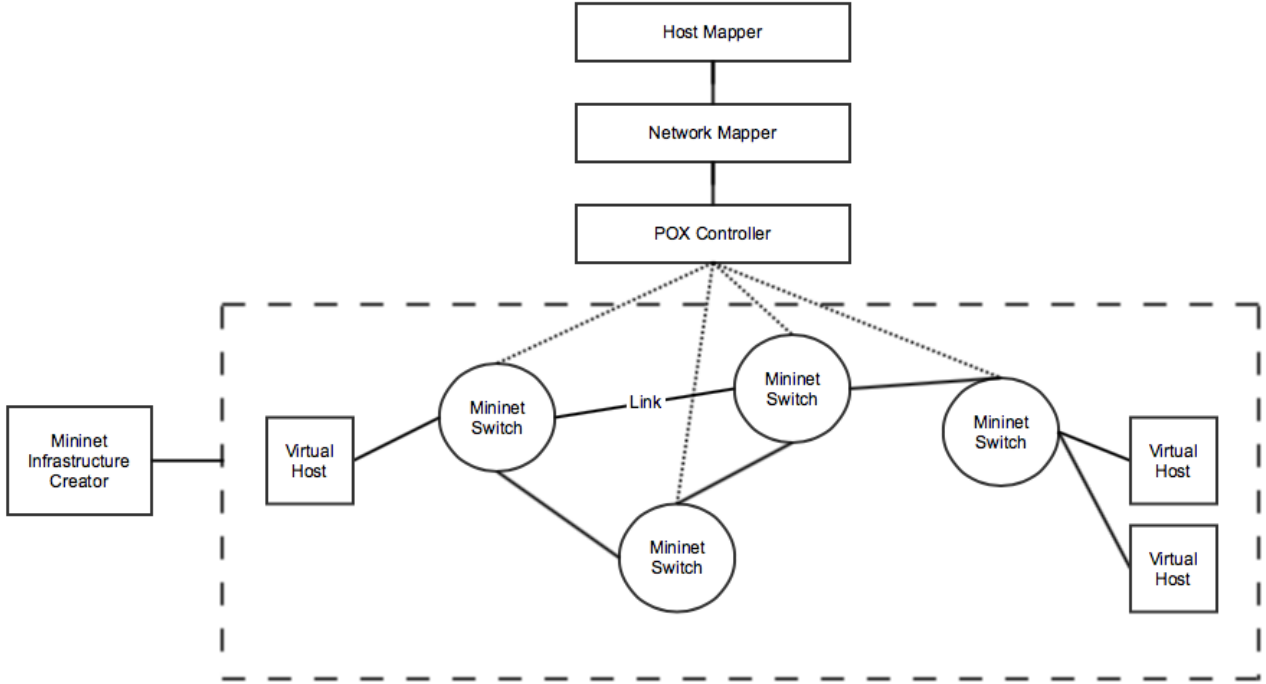
Figure 2.1: POXVine Architecture

the number of switches mapped to a virtual topology, greedy host allocation, providing bandwidth guarantees etc.

All the virtual network entities are mapped to physical hosts, which are connected by the physical network topology. Consider the network graph which is formed by using only the switches and links that are required to connect all the physical hosts (we use the shortest path between two hosts in the network graph). Figure 2.2 demonstrates an example of such a graph.

We have developed *MinSwitchMapper*, which minimises the diameter of the network graph connecting the hosts of the virtual topology, The basis for this heuristic is that the traffic of this tenant's hosts are confined to the *smallest portion* in the physical topology. This also minimises the number of switches where rules regarding this virtual topology is installed, thus increasing the number of tenants we can accomodate in POXVine (provided the physical host capacity is not insufficient)

2.2   NetworkMapper

The *NetworkMapper* module is an application built on top of the POX controller. The role of the NetworkMapper is to use the *virtual-to-physical map-*
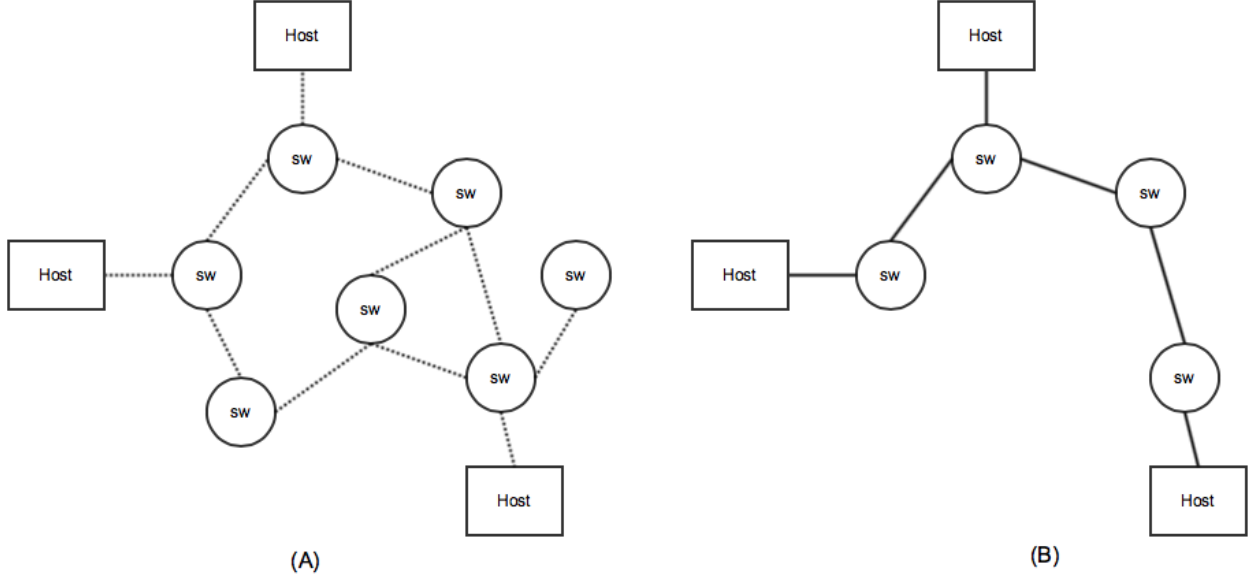
Figure 2.2: POXVine Architecture

pings generated by the host mapper module and add the required routing rules on the mininet switches for the virtual hosts of a tenant. One important design decision is that the NetworkMapper preserves the *virtual network abstraction*. Let us suppose there are two virtual hosts *v1* and *v2*, connected by a path of two switches *s1* and *s2*, i.e $v1 \rightarrow s1 \rightarrow s2 \rightarrow v2$. Irrespective of the mapping, the Network Mapper must add the rules such that traffic from $v1 \rightarrow v2$ must traverse through $s1$, $s2$ and $v2$ in that order.

Chapter 3

Future Work

Future Work