Pompall HX-200: centrifugal pump datasheet

The HX-200 is a single-stage horizontal centrifugal pump for clean water. Its nominal duty point is 120 m³/h at a head of 32 m, driven by a 15 kW motor running at 2900 rpm. This datasheet applies to equipment POMPE-A-01.

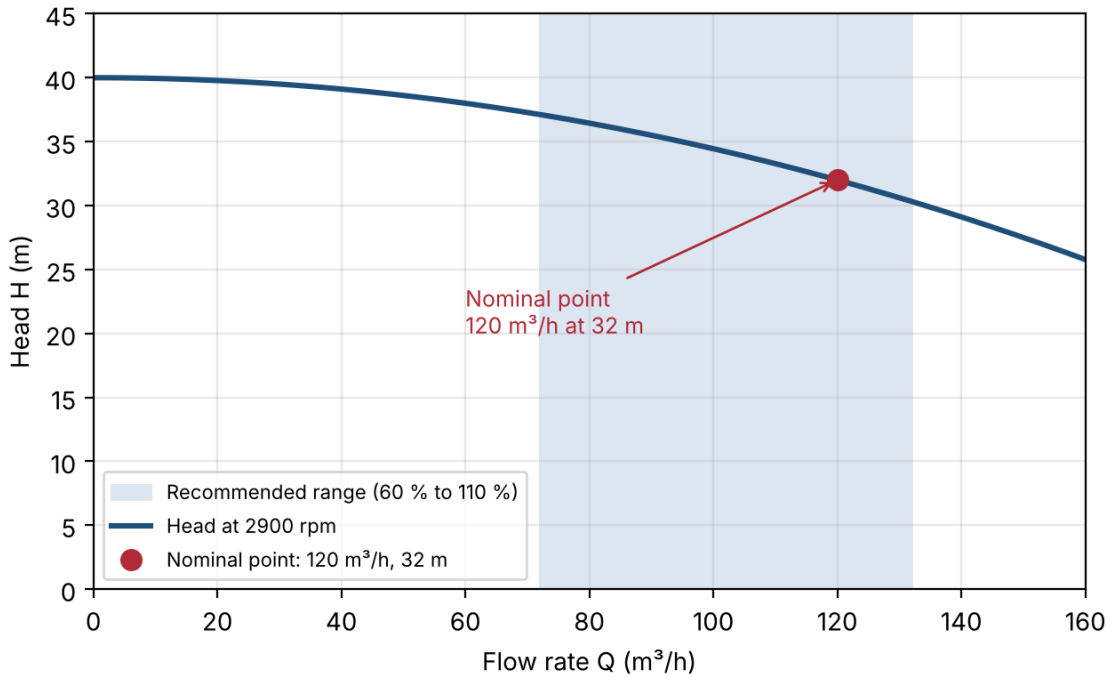


Figure 1: Head versus flow curve of the HX-200 at 2900 rpm

Recommended operating range: 72 to 132 m³/h, that is 60 % to 110 % of the nominal flow. Outside this range, vibration and wear increase.

Document reference: DS-HX200, version v1.0 (2024-11). Technical specifications are given on page 2.

Technical specifications

Table 1: HX-200 technical specifications

Characteristic	Value
Pump type	Single-stage horizontal centrifugal pump
Nominal flow	120 m³/h
Head	32 m
Nominal discharge pressure	3.2 bar
Maximum working pressure	6 bar
NPSH required at nominal point	3.5 m
Inlet connection	DN 100
Outlet connection	DN 80
Motor power	15 kW
Rotational speed	2900 rpm
Supply	400 V ±10 %, 50 Hz, three-phase
Rated current	27 A
Motor protection	IP55, insulation class F
Bearing housing oil	ISO VG 46, 0.8 L
Pumped liquid	Clean water, 5 to 40 °C
Maximum ambient temperature	40 °C
Sound level	78 dB(A) at 1 m
Mass (pump, motor and base frame)	185 kg

For installation, operation and maintenance, refer to the user manual MAN-HX200.