# Compramex VS-55: screw compressor datasheet

The VS-55 is an oil-injected screw compressor delivering 9.5 m³/min at a working pressure of 8 bar. This datasheet applies to equipment COMP-A-01.

**Table 1: VS-55 technical specifications**

| Characteristic | Value |
|---|---|
| Compressor type | Oil-injected screw compressor |
| Motor power | 55 kW |
| Working pressure | 8 bar |
| Regulation range | 7.5 to 8.5 bar |
| Safety valve setting | 10 bar |
| Free air delivery | 9.5 m³/min |
| Supply | 400 V ±10 %, 50 Hz, three-phase |
| Rated current | 96 A |
| Starting method | Star-delta |
| Motor protection | IP55, insulation class F |
| Oil | Synthetic ISO VG 46, 25 L |
| Normal screw block discharge temperature | 85 °C |
| Cooling | Air-oil cooler with fan |
| Air outlet | DN 50 |
| Ambient temperature | 2 to 40 °C |
| Sound level | 70 dB(A) at 1 m |
| Mass | 1150 kg |

Document reference: DS-VS55, version v1.0 (2024-11).

# Flow diagram and protection set points

Figure 1 shows the simplified air and oil flow of the VS-55.

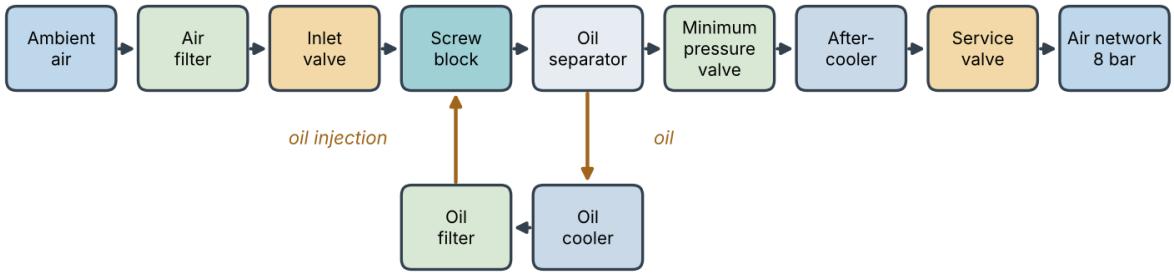



*Figure 1: Simplified flow diagram of the VS-55*

**Table 2: Protection set points**

| Protection | Set point |
|---|---|
| High discharge temperature, alarm | 100 °C |
| High discharge temperature, trip | 110 °C |
| Low oil pressure, trip | 1.5 bar |
| Air filter pressure drop, alarm | 0.05 bar |
| Oil separator pressure drop, alarm | 0.8 bar |

For installation, operation and maintenance, refer to the user manual MAN-VS55.