


Beam Cantilever is
15' Joist Cantilever
is 8.5"

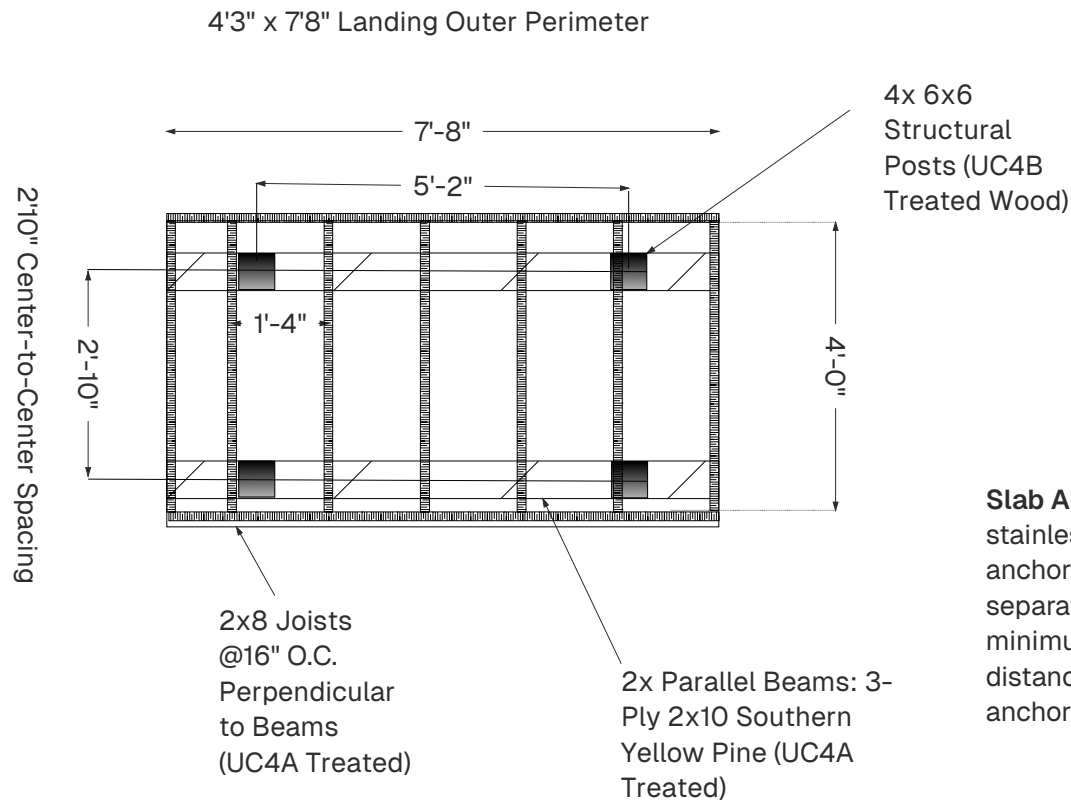

Slab Anchoring: Stair stringers and stainless steel standoff bases are anchored vertically into the existing separate patio slab, maintaining a minimum 4-inch concrete edge distance and 6-inch clearance from old anchor locations.

Prescriptive Standard:
Construction strictly adheres to the Florida Residential Code (FRC) and DCA6 Prescriptive Standards. Property is located in Flood Zone AE (BFE 12).

Hardware & Fasteners: All post-to-beam and post-to-slab connections utilize Simpson Strong-Tie Stainless Steel hardware with Stainless Steel SDWS structural screws. See attached manufacturer Florida Product Approval sheets.

Wood Treatment: All framing below BFE uses flood-damage resistant materials. Posts and stair stringers touching concrete are treated to UC4B (Heavy Duty Ground Contact). All upper framing is UC4A.