



PWM DRIVER

Optional I2C pullup

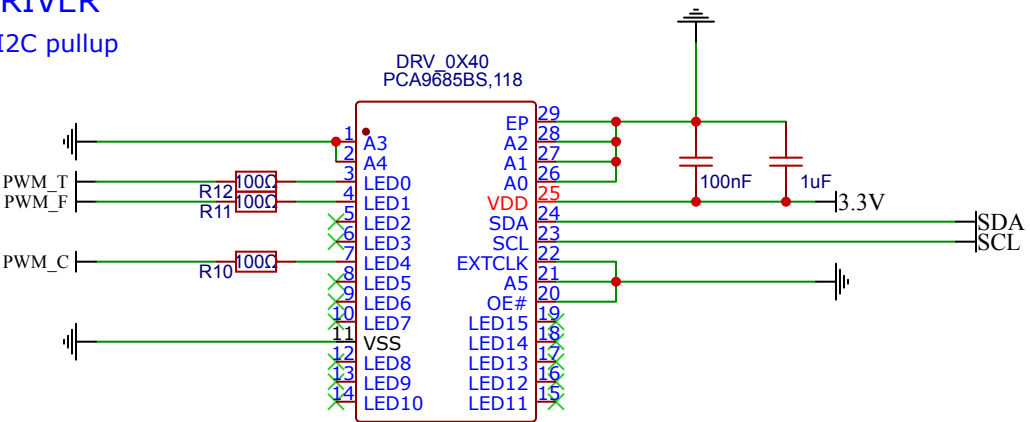


I2C MULTIPLEXER

Optional I2C pullup

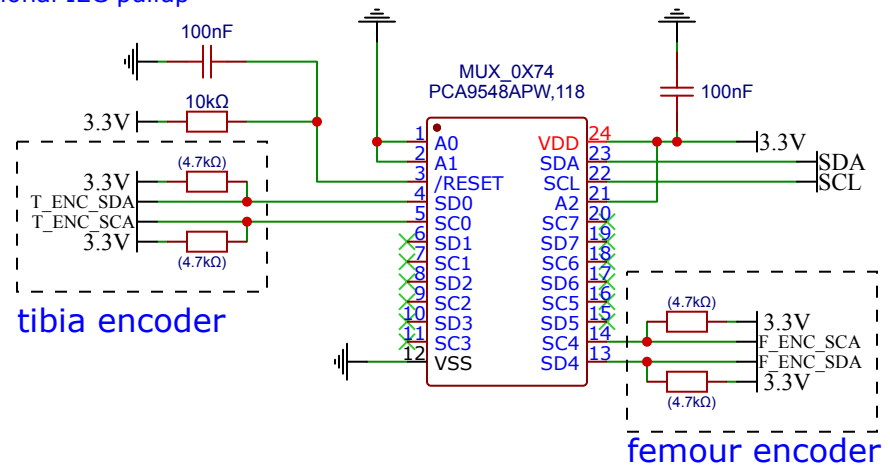


CURRENT SENSE IN + GENERIC ANALOG IN

Optional pull-up for ALERT/RDY interrupt output
Diodes: BAT54WSQ-7-F

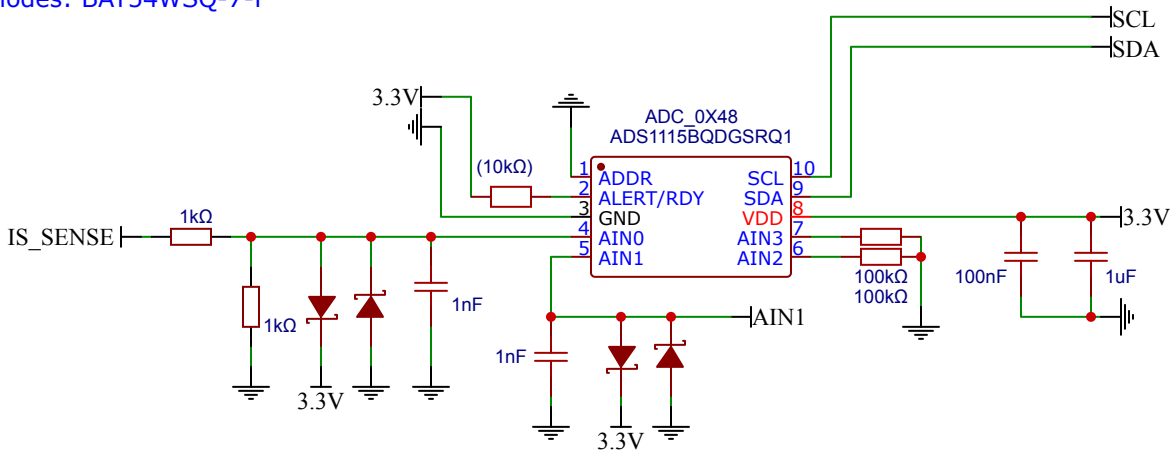


DIFFERENTIAL I2C INTERFACE

Differential I2C signals arrive from Teensy side

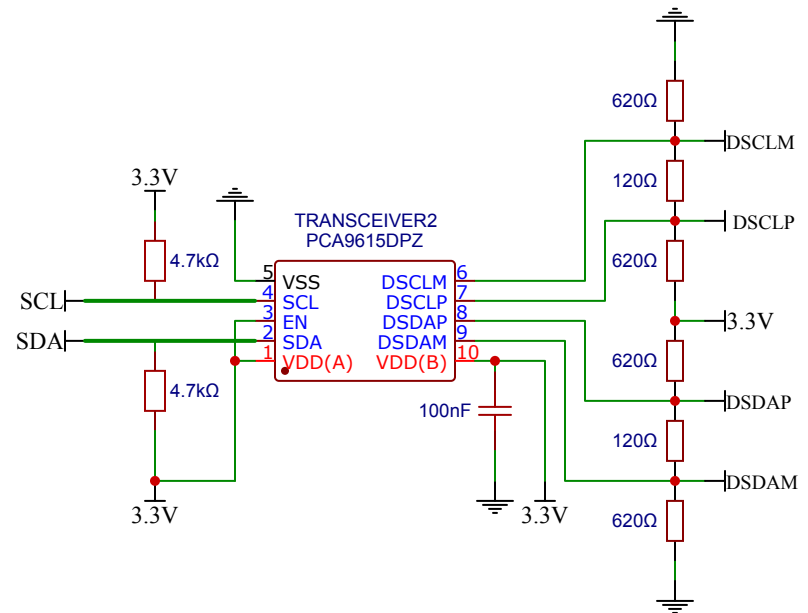

GPIO EXPANDER

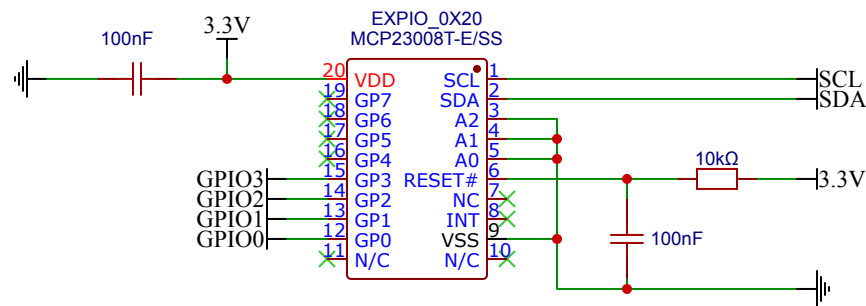



TITLE: LEG_logic_control		REV: 1.0
Company:		Sheet: 1/1
Date: 2026-05-27	Drawn By: enricomariotto91	

GPIO

Conn type: JST-SH 1.0mm 4-PIN SMD

All digital inputs use identical conditioning
Components shown in parentheses are DNP by default.

LEG-SIDE CONNECTIONS

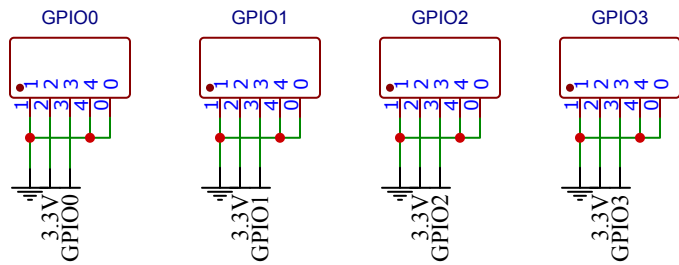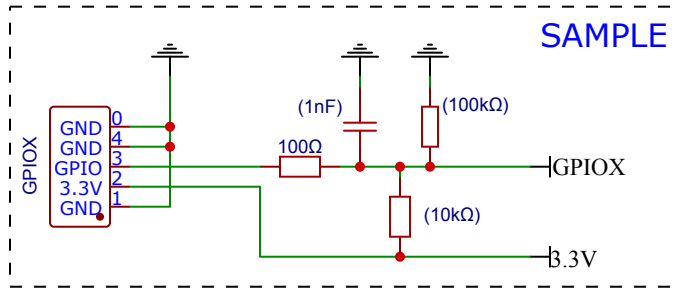


I2C ENCODERS

TIP IN

Conn type: JST-SH 1.0mm 8-PIN SMD

Tip signal from tibia switch

MIX-SIDE CONNECTIONS

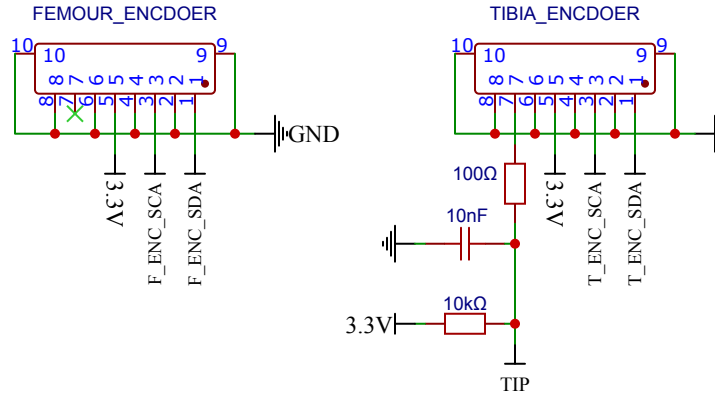


I2C ENCODERS

Conn type: JST-SH 1.0mm 8-PIN SMD

Differential I2C signals from Teensy
Tip signal to Teensy


MIX-SIDE CONNECTIONS

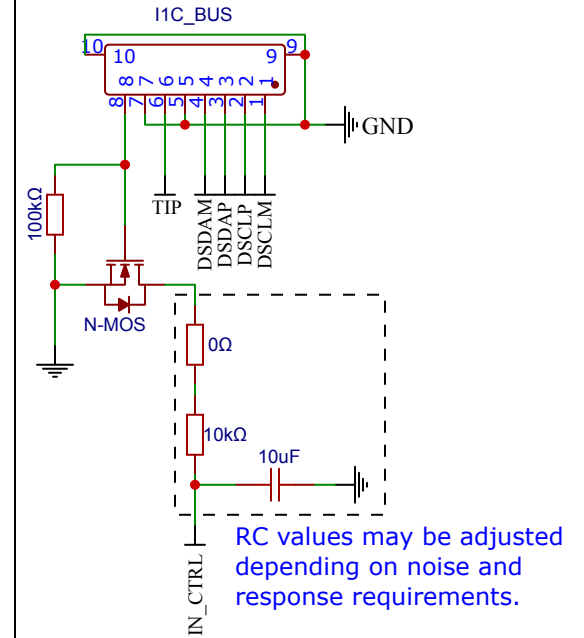

BTS443P INTERFACE

Conn type: 2.54mm 11-PIN HEADER


LEG_PWR-SIDE CONNECTIONS

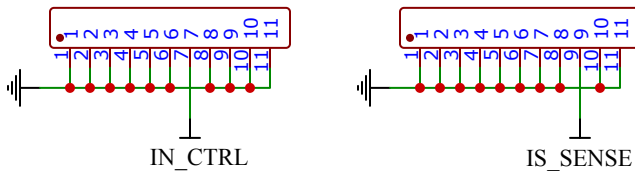

ANALOG IN

Conn type: JST-SH 1.0mm 4-PIN SMD


Components shown in parentheses are DNP by default.

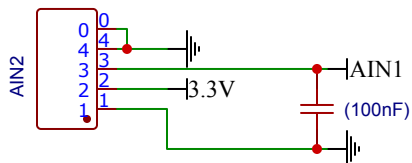

PWM


Conn type: JST-PH 2.0mm 2-PIN THT

LEG-SIDE CONNECTIONS

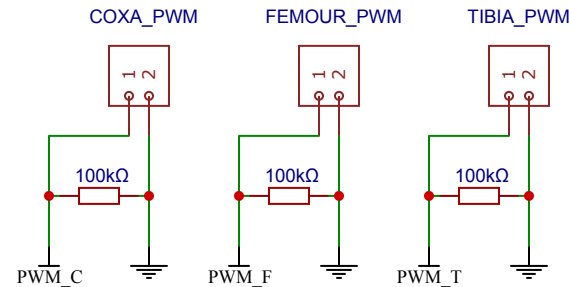

AUXILIARY 3.3V OUTPUTS

Conn type: JST-PH 2.0mm 2-PIN THT

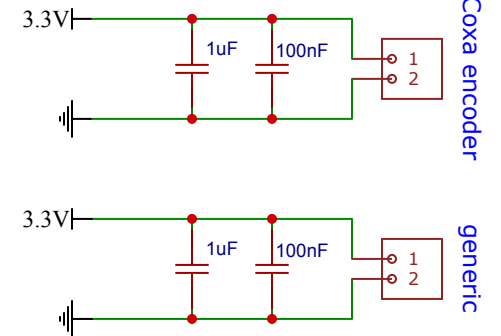

TITLE:

LEG_logic_Connectors

REV: 1.0

Company:

Sheet: 1/1


Date: 2026-05-27 Drawn By: enricomariotto91

LOCAL 3.3V REGULATION

Conn type: JST-XH 2.54mm 2-PIN THT

5V supply provided by the main power board

Optional 5V daisy-chain output (5V_VOUT)

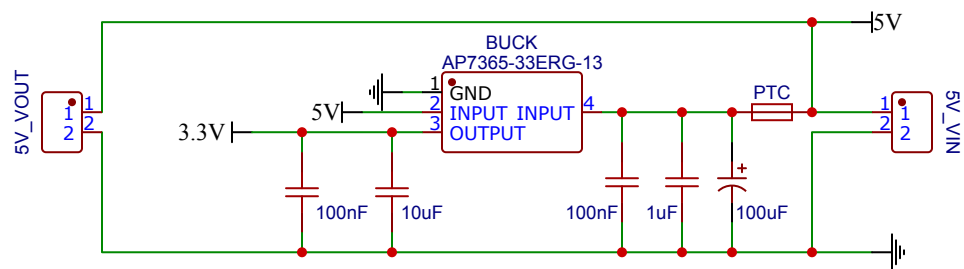

TITLE: LEG_logic_power		REV: 1.0
	Company:	Sheet: 1/1
	Date: 2026-05-28 Drawn By: enricomariotto91	