


Engineered interior material systems

Fastening and formed PET solutions for
automotive seating and interiors

TECHNICAL SALES PRESENTATION

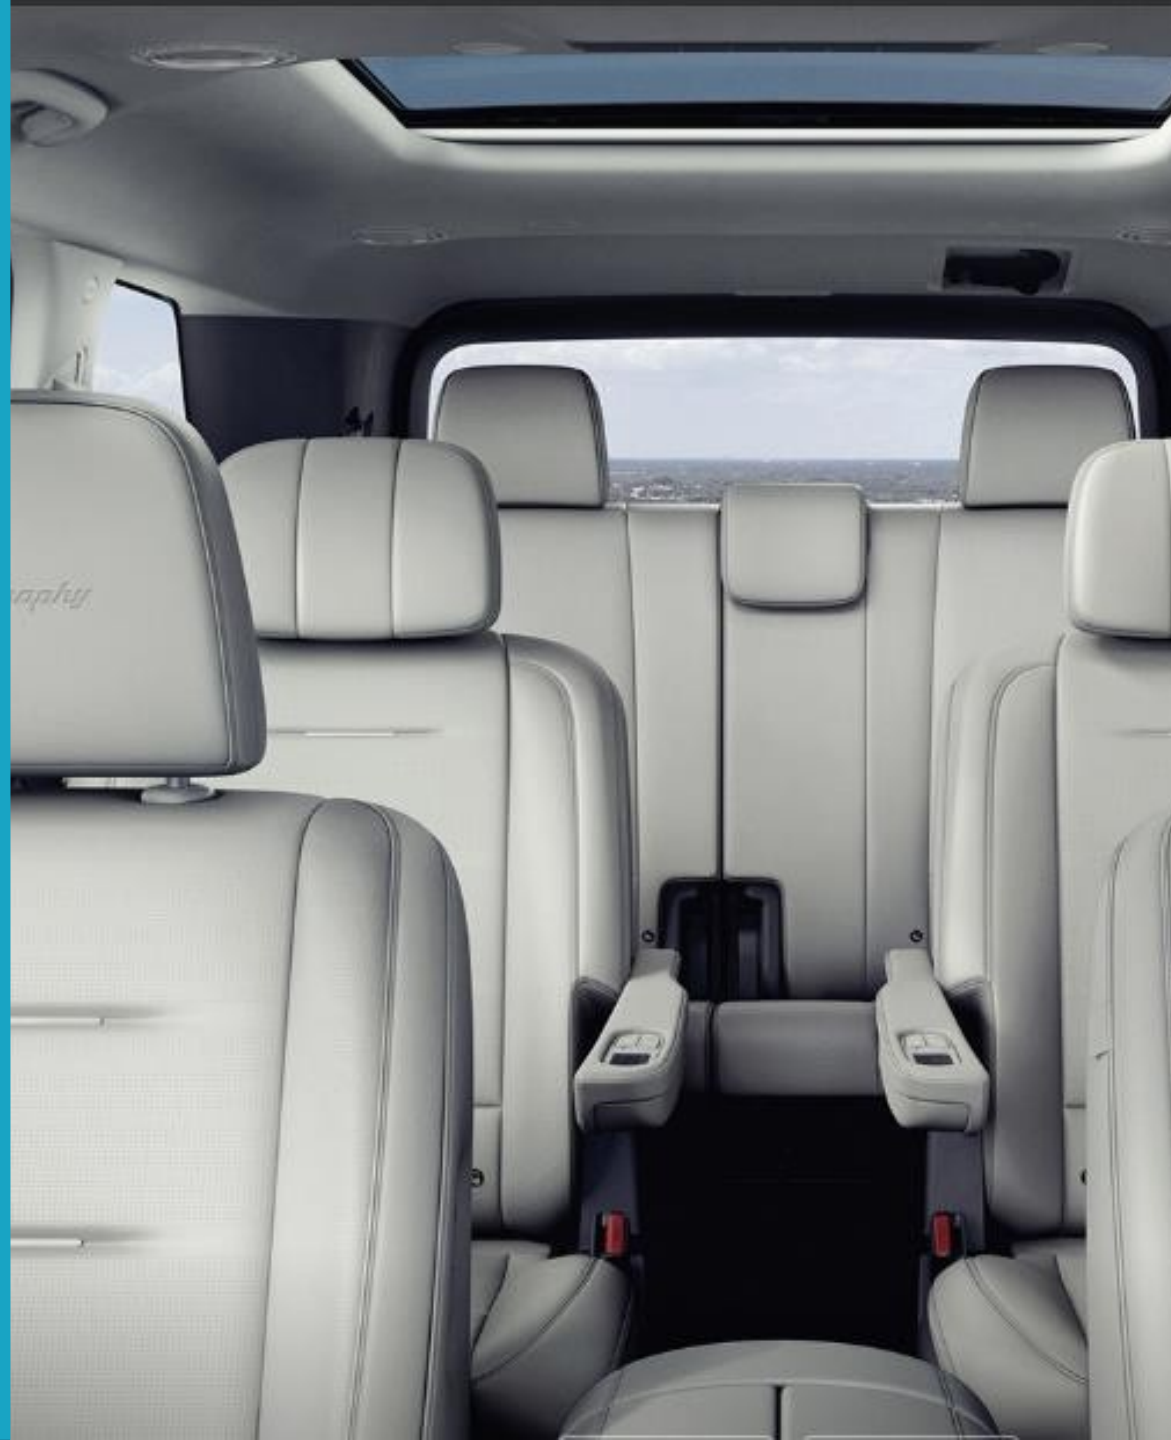


Two platforms address interior assembly needs



FASTENING PLATFORM

Mold-in hook, automotive loop, Twin Lock and support components

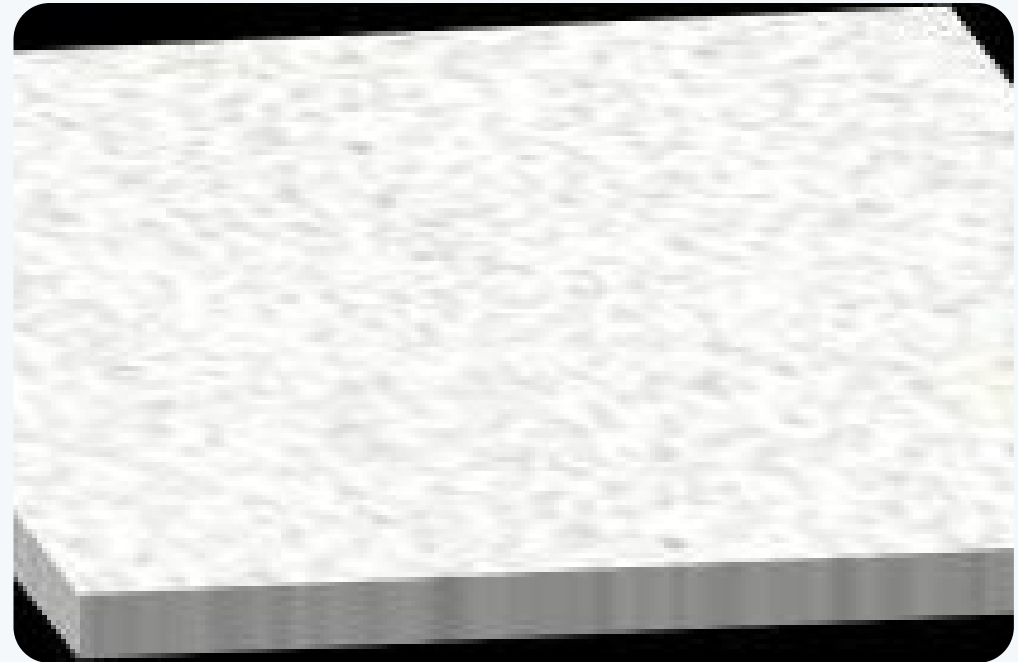

FORMED PET PLATFORM

PSF Board for seat-back, skirt, armrest and trim support

Products serve foam, trim and interiors



Molded seat pad



Sunroof / headliner




Door trim



Armrest support

Each application requires its own substrate, temperature, load and customer-standard validation.

Hook evidence combines force and foam trials

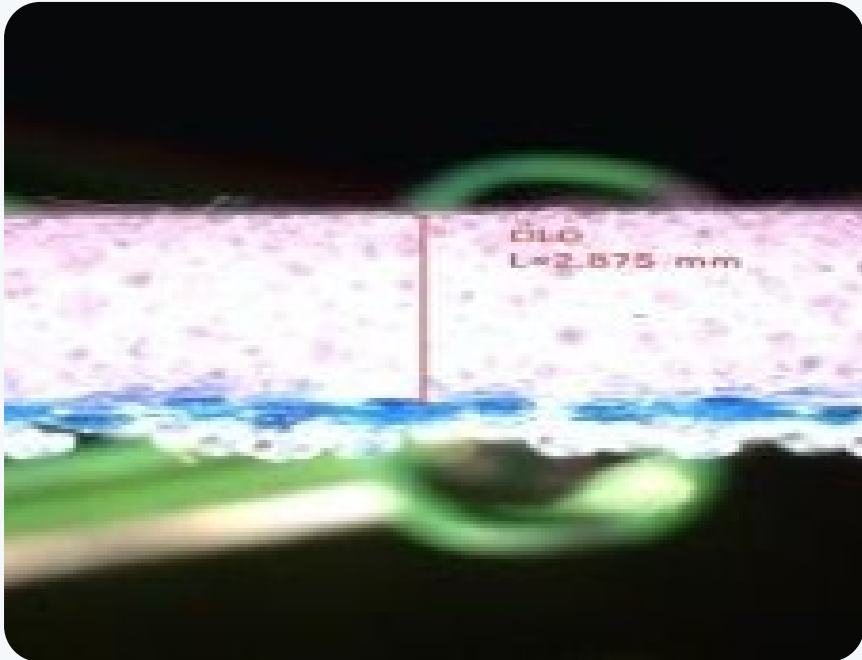

17

kgf

Hook-to-loop source test
10 x 100 mm

23

kgf


Hook-to-seat-pad source
test
10 x 100 mm

The source deck also presents foam cross-sections and visual void-prevention comparisons.



Confirm test protocol, conditioning and foam-process parameters before comparison.


Twin Lock force shifts with temperature

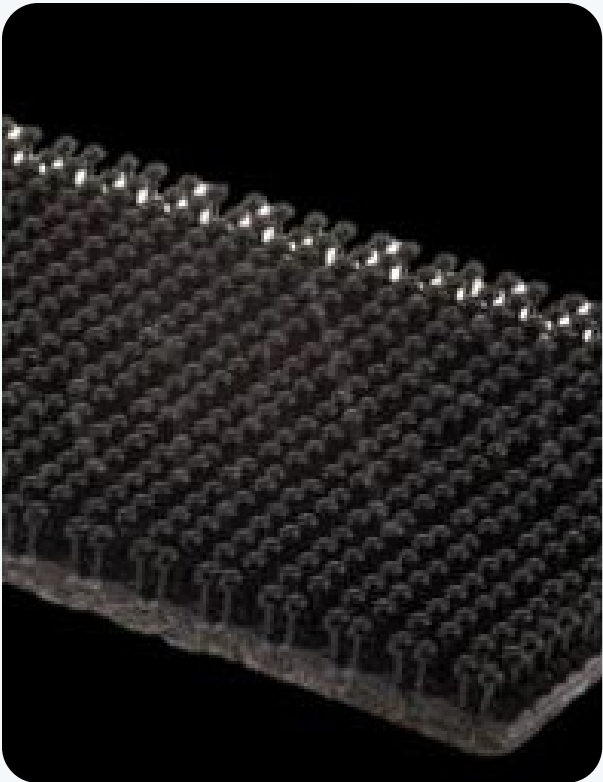

Configuration	23 C	-30 C	120 C
#400 / #400	26.3 kgf	33.7 kgf	8.7 kgf
#400 / #250	19.7 kgf	26.5 kgf	7.5 kgf

Average kgf calculated from four readings per condition; specimen 25 x 25 mm.

PSF Board targets formed support applications

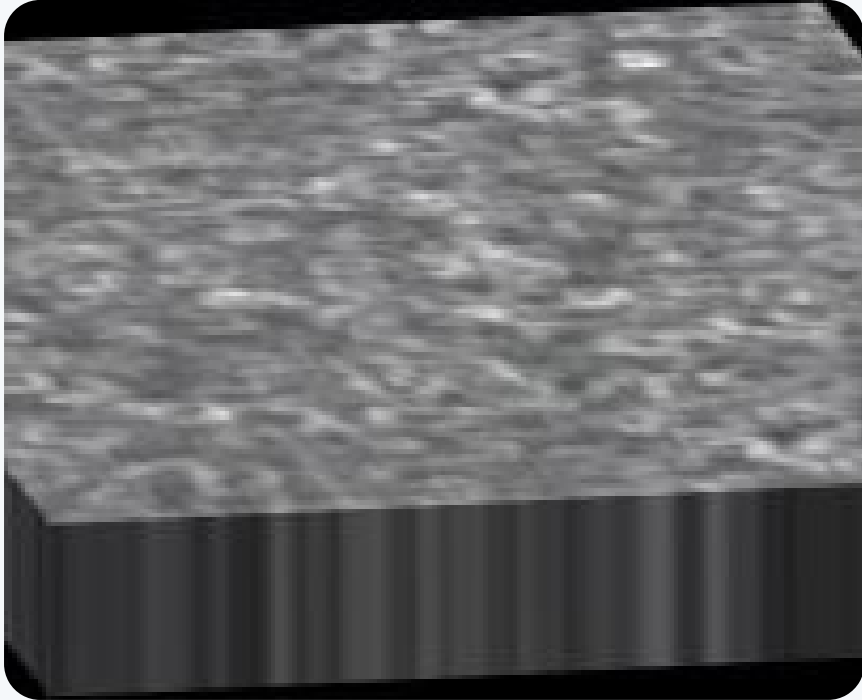

SOURCE CONFIGURATIONS

800 g/m²

Board configuration
350 + 100 + 350 g/m²

1,200 g/m²

Cover configuration
550 + 100 + 550 g/m²



Production supports both platforms



Hook material processing



Fastener conversion line



PSF Board thermal processing

Capacity, utilization, maintenance controls and contingency plans must be added to the RFQ data pack.

Evidence exists, but qualification gaps remain

Evidence in source materials	Confirm for North American sourcing
ISO 9001:2015 status	IATF 16949 status
Hook force results	PPAP and IMDS capability
Hyundai-Kia MS summaries	FMVSS 302 documentation
Twin Lock temperature / cycle data	Heat, humidity and aging matrix
PSF material and application data	GRS scope and current validity
Factory and equipment photos	Capacity, lead time and commercial terms

Staged validation reduces sourcing risk



Decision gate: move to commercial approval only after technical evidence and supply assumptions align.

Begin with one controlled application



Request a technical review and sample package

- Select the target part and substrate
- Confirm the customer specification
- Define test quantities and timing
- Prepare technical and commercial data

Ulsan, Korea | +82 52 264 9104-5