


PSF Board for automotive interiors

PET staple-fiber support material for seat
and trim components

TECHNICAL SALES PRESENTATION



PSF Board supports selected interior trim parts

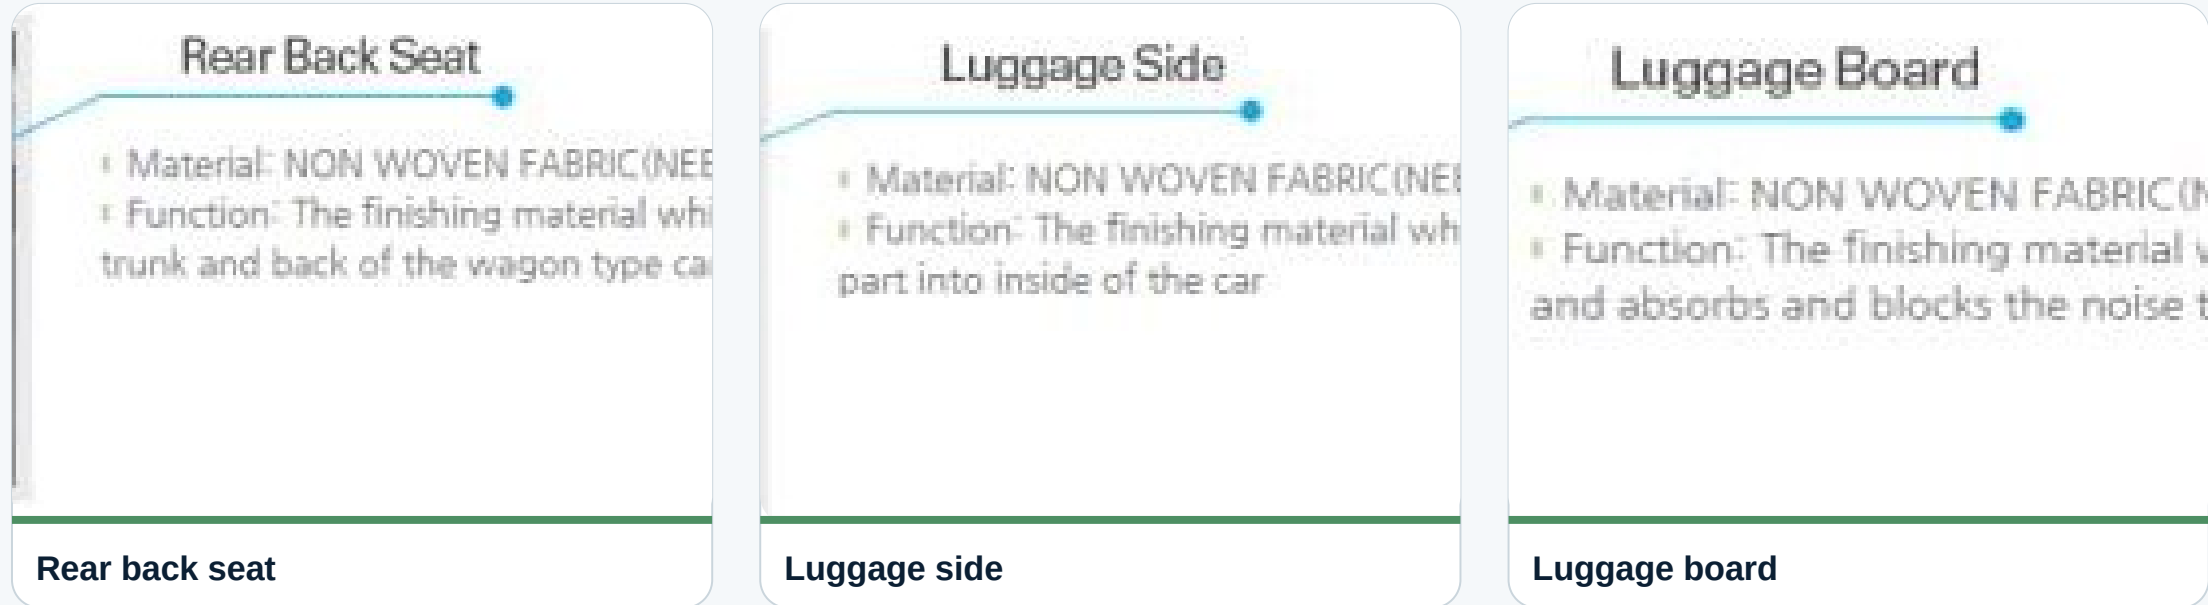

The material is positioned as a formed support layer for appearance, shape retention and part integration.

Crystalline R-LMF expands the thermal window


Source property	LMF	R-LMF
Structure	Amorphous	Crystalline
Softening point	65 C	140 / 150 C
Melting point	Not detected	160 / 180 C
Shrinkage at 75 C x 15 min	5.0%	1.0%
Chemical durability	Source rating: Not good	Source rating: Good
Forming durability	Source rating: Not good	Source rating: Good

Why it matters

A higher melting range may improve forming stability.

Confirm the resin grade and supplier data sheet before publication.

The board uses a multi-layer PET construction

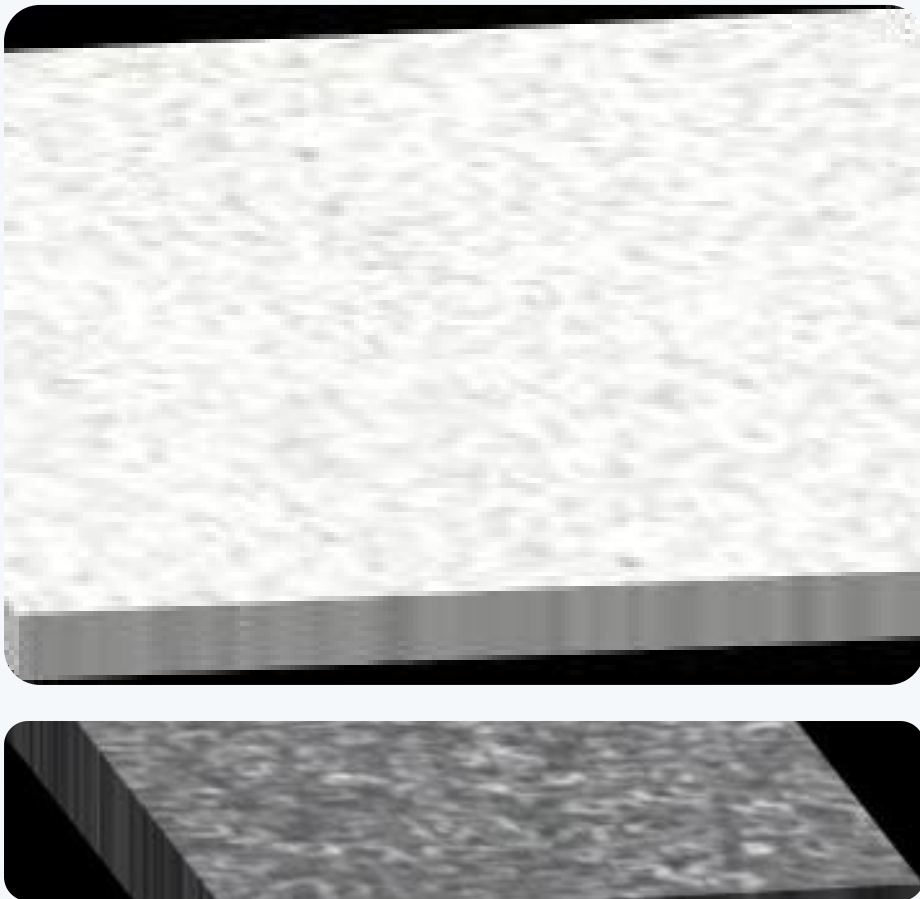

Skin

PET nonwoven

Substrate

PET fiber

Reinforcement

High-melt PET layer


Backing

PET nonwoven


Source materials describe hot processing followed by cold pressing to form the rigid board.

Two PSF constructions cover board and trim

800 g/m2 board configuration

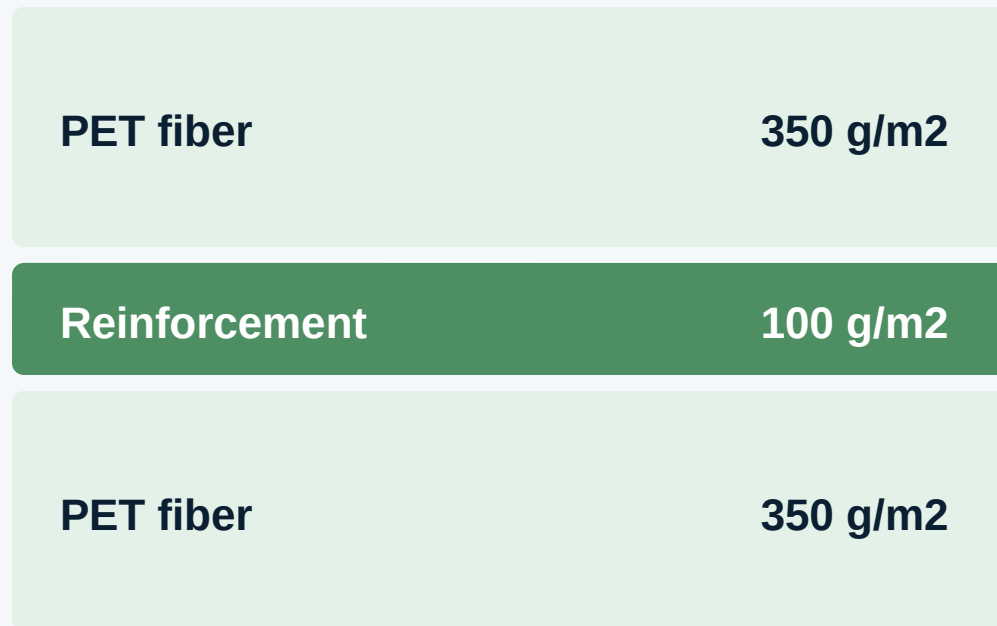

1,200 g/m2 cover configuration

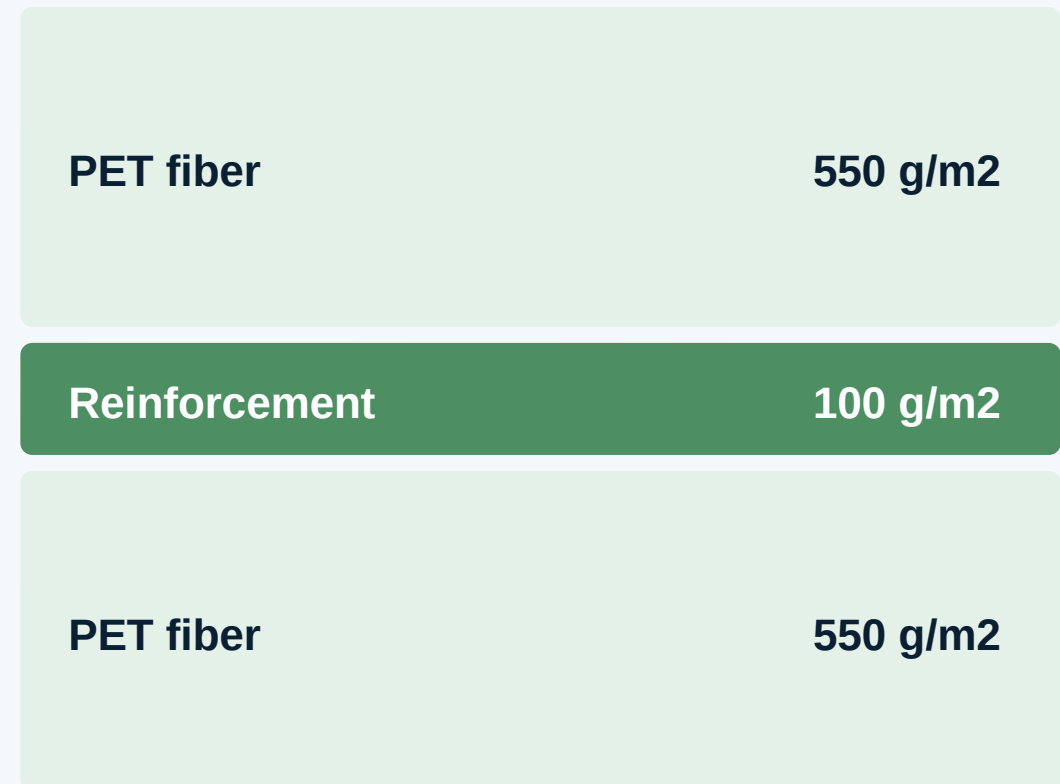

Eight steps convert fiber into formed board



01 Raw material



02 Mixing



03 Control hopper



04 Carding




05 Web cross



06 Needle punch



07 Heating

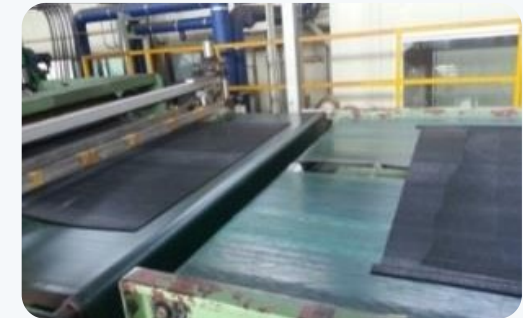

08 Cutting

The reliability table needs acceptance review

Metric	Listed requirement	Source result	Review
Basis weight	1,400 g/m2	1,200 g/m2	Confirm intended grade
Water tensile	1,680 / 2,000 N	1,637 / 1,806 N	Below listed values
Absorption	<= 5%	0.7%	Within numerical limit
Flammability	<= 80 mm/min	S.E.	Define abbreviation / report
Heavy metals	MS 201-02	Not detected	Obtain report copy

[illegible]

Do not publish a blanket 'pass' statement until grade, direction and acceptance criteria are reconciled.

Values are reproduced from the supplied table; no pass/fail status has been inferred.

Seat-back case targets appearance stability



Issue condition



PSF Board application



Back-side component

Source-described improvement goals

Reduce skirt displacement and local bending while improving sewing and appearance.

Armrest case improves shape and sewing stability



Prior substrate



Seat assembly



Finished armrest



PSF Board insert

Source-described goals: reduce buckling at open sections, improve sewing support and stabilize the finished appearance.

Applications span covers, skirts and armrests



Seat-back cover



Interior trim frame



Skirt / panel




Integrated insert

The source deck also lists rear-back covers, side covers and console-related trim applications.

Sustainability claims require current proof

SOURCE SUSTAINABILITY NARRATIVE

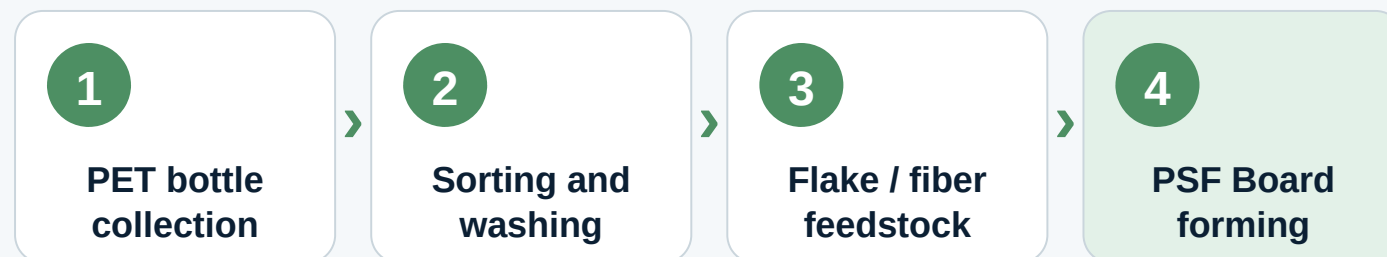

Confirm before release

- Certificate holder and site
- Current validity period
- Product and material scope
- Recycled-content percentage
- Transaction certificates



A GRS certificate image is included in the source materials. Confirm the certificate holder, site, validity period, material scope and transaction certificates before making a customer claim.

A certificate image is present in the source deck; current applicability has not been independently verified.

Validate material, part and process together

1

Material data

Grade, recycled content and declarations

2

Flat-sheet test

Mechanical, thermal and flammability

3

Part forming

Tool, temperature and cycle window

4

Assembly

Sewing, attachment and appearance

5

Program approval

Customer specification and PPAP route

Request a technical review, flat-sheet samples and the target customer specification.

Ulsan, Korea | +82 52 264 9104-5