


REVISIONS		
REV	DESCRIPTION	DATE
1.0	Prototype Release	4/18/19
1.1	Updated Connector/Wiring Table	7/26/19

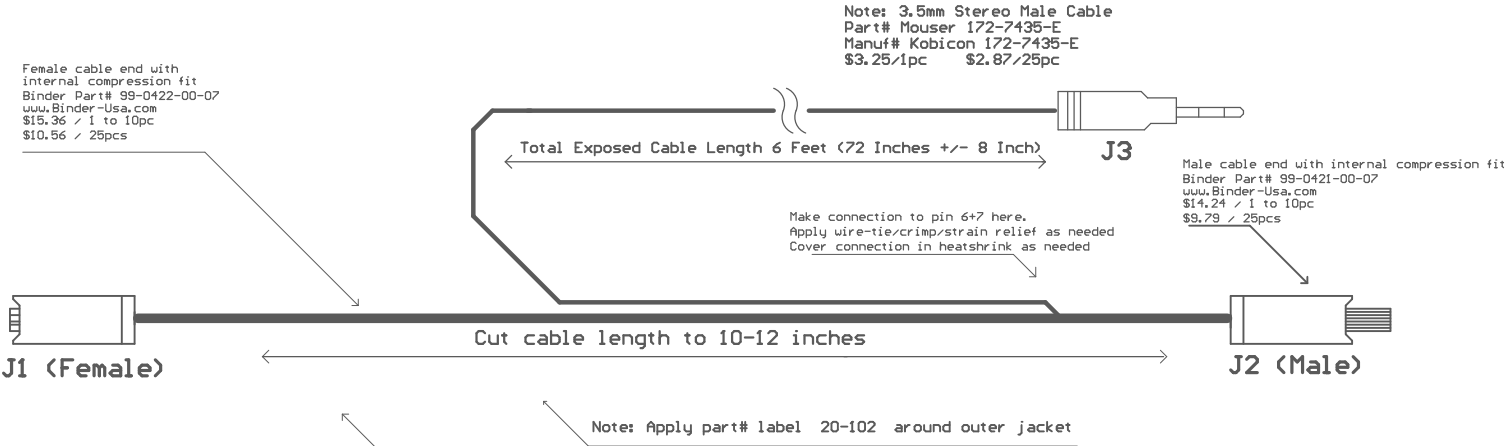

SmartyCam to RaceVoice Connection Table	
J1-1	J2-1
J1-2	J2-2
J1-3	J2-3
J1-4	J2-4
J1-5	J2-5
J1-6	J2-6 and J3-BareCopper/Shield Wire
J1-7	J3-Red+White Signal Wires

Note: Wire should be 26AWG four conductor stranded
PVC jacket with outer diameter of 0.140 to 0.200 inches

Alternatively, 7 individual 26AWG wires may be used
as long as a jacket such as 3/16 RAYCHEM DR-25 is used to contain
all leads.

Vendor may select wire as needed.

RaceVoice			
SmartyCam to RaceVoice 3.5mm			
SIZE D	DRAWN BY SHS	PART NUMBER 20-102	REV 1.1
SCALE 1:1		SHEET 1 of 1	