


FIREWALL BULKHEAD – D38999 61-WAY (INSERT ARRANGEMENT 25-61)

RECEPTACLE D38999/24WJ61SN (FIREWALL) + PLUG D38999/26WJ61PN (ENGINE LOOM) – 61/61 CAVITIES USED, 0 SPARE, 8 OVERFLOW

spec PN "D38999/26WA98SN" (2026-04-13) IS MALFORMED – superseded by CONNECTOR_DATA_REPORT verified PNs above

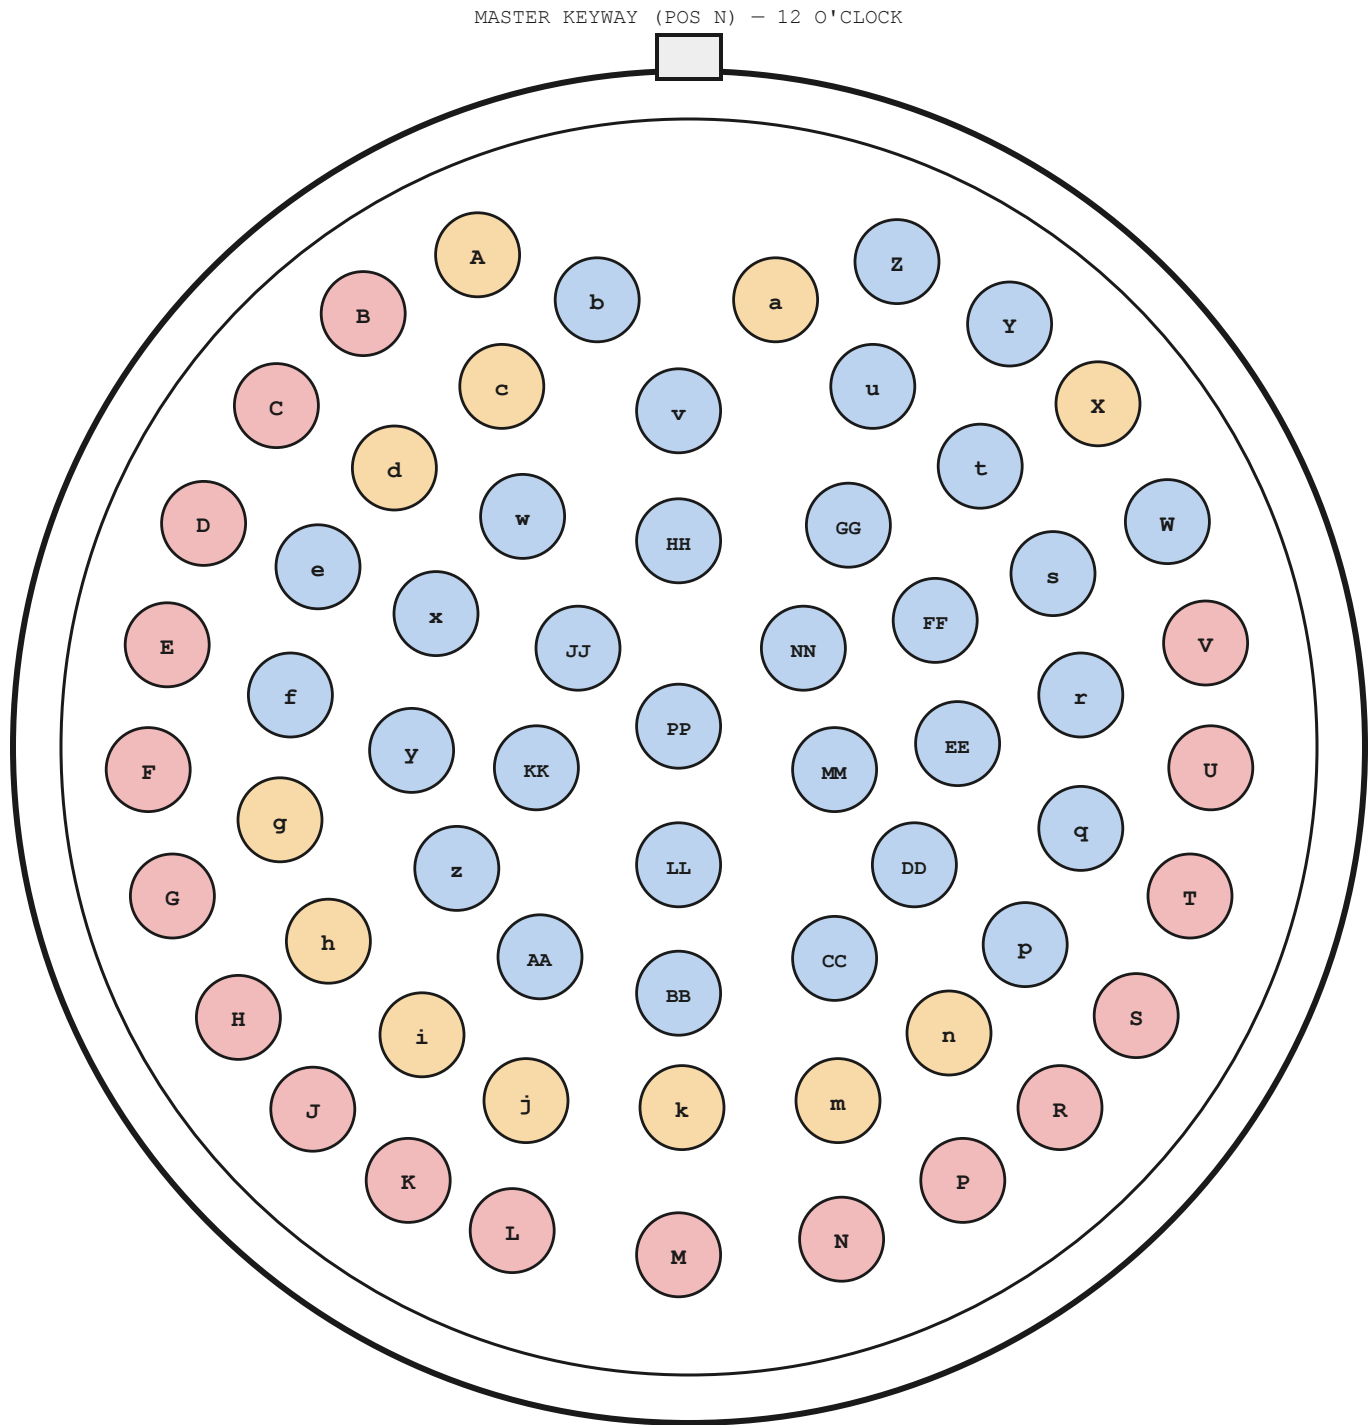

VIEW: MATING FACE, ENGINE SIDE

(socket-insert face = MIRROR of MIL-STD-1560 pin-insert drawing, MILNEC p. B-22)

■ SENSOR/SIG ■ INJ/COIL/ETB ■ PWR/LIGHTING ■ CAN (none) ■ SPARE

SHELL: D38999/24WJ61SN jam-nut receptacle (firewall) / D38999/26WJ61PN plug (engine loom)
CONTACTS: M39029/56-351 socket (receptacle) + M39029/58-363 pin (plug) – size #20, 20-24 AWG, 7.5 A, gold/nickel. Crimp M22520/2-01 (AFM8). Seal plugs in spare cavities.
INSERT 25-61 per MIL-STD-1560: 61 x #20, service rating I, shell 25 – verified MILNEC insert-arrangement catalog p. B-20 + B-22 (milnec.com/.../d38999-contact-arrangements.pdf)
JAM NUT 120-130 in-lb; couple hand-tight + 1/8 turn. CONNECTOR_DATA_REPORT.md 1.1-1.8

CAVITY ASSIGNMENT RULES (full text: receipt 2026-06-10_connector-build-sheets.md) :

R1 SEED: 2026-04-13 bulkhead pins 1-54 -> designators in MIL-STD-1560 order (1=A..23=Z,24=a..47=z,48=AA..54=GG); wire keeps seed cavity iff still in cut list v4, still crosses firewall, and 20-24 AWG.
R2 GAUGE: #20 contact = 20-24 AWG ONLY. Crossing wires 18 AWG+ -> DOES-NOT-PASS block (right).
R3 FILLS: new v4 + companion wires fill freed/spare cavities by run-critical priority, nearest free cavity to parent.
R4 SHIELDED: CKP/CMP/knock cond-2 + drain adjacent to signal cavity. R5 gnd+5V pairs are all-or-nothing.
R6 OVER CAPACITY: 77 candidate crossings > 61 cavities -> 8 wires in OVERFLOW (below). DECISION REQUIRED.

OVERFLOW – CROSSES FIREWALL, NO CAVITY (8 WIRES)

#102g OPS ground – pairs with 102r (R5: all-or-nothing)
#102r OPS 5V ref – DD has signal only: sensor DEAD until resolved
#112g FPS ground – pairs with 112r
#112r FPS 5V ref – y has signal only: sensor DEAD until resolved
#100 VSS – crosses per wire_paths (L02); NOT in 2026-04-13 seed (spec routed underbody)
#60 ECU power – 22 AWG 'ECU' semantics unclear; M130 BAT_POS A26 has NO wire in v4
#114 Dakota CTS sender (factory, driver head boss)
#115 Dakota oil pressure sender (galley boss)

CAV	WIRE #	CIRCUIT	COLOR	AWG	LEN	ENGINE-SIDE DEST	CAB-SIDE PIN
A	#23	A/C Compressor Clutch	ORN/RED	20	4.6ft	A/C compressor clutch coil	PDM30:OUT16
B	#4b	ETB TAC Motor 1	YEL	20	4.6ft	ETB GM 12605109 pin B	M130:A18
C	#4a	ETB TAC Motor 2	BRN	20	4.6ft	ETB GM 12605109 pin A	M130:A01
D	#13	Fuel Injector 1	GRN	22	4.6ft	EV6 inj @ rail cyl 1	M130:A19
E	#14	Fuel Injector 2	GRN/WHT	22	4.6ft	EV6 inj @ rail cyl 2	M130:A20
F	#15	Fuel Injector 3	GRN/BLK	22	4.6ft	EV6 inj @ rail cyl 3	M130:A21
G	#16	Fuel Injector 4	GRN/RED	22	4.6ft	EV6 inj @ rail cyl 4	M130:A22
H	#17	Fuel Injector 5	GRN/BLU	22	4.6ft	EV6 inj @ rail cyl 5	M130:A27
J	#18	Fuel Injector 6	GRN/YEL	22	4.6ft	EV6 inj @ rail cyl 6	M130:A28
K	#19	Fuel Injector 7	GRN/VIO	22	4.6ft	EV6 inj @ rail cyl 7	M130:A29
L	#20	Fuel Injector 8	GRN/ORG	22	4.6ft	EV6 inj @ rail cyl 8	M130:A30
M	#24	Ignition Coil 1	WHT/ORG	22	2.5ft	D510C coil 1 @ DEL-Stributor	M130:A13
N	#9	Ignition Coil 2	WHT/RED	22	2.5ft	D510C coil 2 @ DEL-Stributor	M130:A06
P	#5	Ignition Coil 3	WHT	22	2.5ft	D510C coil 3 @ DEL-Stributor	M130:A03
R	#10	Ignition Coil 4	WHT/BLU	22	2.5ft	D510C coil 4 @ DEL-Stributor	M130:A07
S	#7	Ignition Coil 5	WHT/WHT	22	2.5ft	D510C coil 5 @ DEL-Stributor	M130:A04
T	#11	Ignition Coil 6	WHT/YEL	22	2.5ft	D510C coil 6 @ DEL-Stributor	M130:A08
U	#8	Ignition Coil 7	WHT/BLK	22	2.5ft	D510C coil 7 @ DEL-Stributor	M130:A05
V	#12	Ignition Coil 8	WHT/VIO	22	2.5ft	D510C coil 8 @ DEL-Stributor	M130:A12
W	#113g	OTS Sensor Ground	BLK	22	4.6ft	OTS pin 2 (gnd return)	M130:B15
X	#95	Bosch iBooster Relay	ORN/WHT	22	2.3ft	iBooster relay @ firewall	PDM30:OUT?
Y	#110g	CLT Sensor Ground	BLK	22	4.6ft	CLT pin 2 (gnd return)	M130:B16
Z	#101r	CMP 5V Reference	GRY	22	4.6ft	CMP 5V supply	M130:A09
a	#50	Washer Pump	ORN/BLK/RED	22	4.6ft	Washer pump	PDM30:OUT26
b	#101s	CMP Shield Drain	BARE	22	4.6ft	CMP shield (drain @ ECU end only)	M130:B16
c	#64	Wideband Lambda Controller	ORN/BLK	22	4.6ft	Wideband lambda controller (engine bay)	PDM30:OUT24
d	#73	Underhood Light	BRN/RED	22	4.6ft	Underhood light	PDM30:OUT25
e	#4e	ETB 5V Reference	GRY	22	4.6ft	ETB GM 12605109 pin E	M130:A02
f	#4f	ETB Signal Ground	BLK	22	4.6ft	ETB GM 12605109 pin F	M130:B15
g	#83	Parking Light Left Front	BRN/RED	22	4.6ft	Parking lamp front L	PDM30:OUT13
h	#84	Parking Light Right Front	BRN/BLU	22	4.6ft	Parking lamp front R	PDM30:OUT13
i	#87	Side Marker Front Left	BRN/YEL	22	4.6ft	Side marker front L	PDM30:OUT19
j	#88	Side Marker Front Right	BRN/VIO	22	4.6ft	Side marker front R	PDM30:OUT19
k	#80	Turn Signal Left Front	LT BLU	22	4.6ft	Turn signal lamp front L	PDM30:OUT27
m	#82	Turn Signal Right Front	DK BLU	22	4.6ft	Turn signal lamp front R	PDM30:OUT28
n	#94	Fuel Pump Relay	ORN	22	4.6ft	Fuel pump relay (engine bay)	PDM30:OUT?
p	#104s	Knock B2 Shield Drain	BARE	22	4.6ft	Knock B2 shield	M130:B16
q	#108g	MAP Sensor Ground	BLK	22	4.6ft	MAP pin (gnd)	M130:B15
r	#108r	MAP 5V Reference	GRY	22	4.6ft	MAP pin (5V)	M130:A09
s	#109g	IAT Sensor Ground	BLK	22	4.6ft	IAT pin 2 (gnd return)	M130:B15
t	#111	A/C Pressure Switch High	ORN/VIO	22	4.6ft	A/C pressure switch HIGH	M130:UDIG?
u	#105	A/C Pressure Switch Low	ORN/YEL	22	4.6ft	A/C pressure switch LOW	M130:UDIG?
v	#101	Cam Position Sensor	BLU/WHT/BLK	22	4.6ft	CMP @ front cover	M130:B02
w	#110	Coolant Temp Sensor (ECU)	TAN/WHT	22	4.6ft	CLT @ driver head	M130:B04
x	#99	Crank Position Sensor	BLU/WHT/WHT	22	4.6ft	CKP @ front timing cover (Gen IV)	M130:B01
y	#112	Fuel Pressure Sensor	VIO/BLK	22	4.6ft	FPS @ fuel rail gnd+5V IN OVERFLOW	M130:A16
z	#109	Intake Air Temp Sensor	TAN	22	4.6ft	IAT in intake tract	M130:B03
AA	#103	Knock Sensor Bank 1	GRY	22	4.6ft	Knock B1 below exhaust	M130:B07
BB	#104	Knock Sensor Bank 2	GRY/WHT	22	4.6ft	Knock B2 below exhaust	M130:B13
CC	#108	MAP Sensor	VIO/WHT	22	4.6ft	MAP (ACDelco PT2293 pigtail)	M130:A15
DD	#102	Oil Pressure Sensor (ECU)	VIO	22	4.6ft	OPS @ galley boss (WP0IL40 pig gnd+5V IN OVERFLOW	M130:A25
EE	#113	Oil Temperature Sensor	TAN/BLK	22	4.6ft	OTS @ oil galley	M130:B05
FF	#4c	ETB TPS1 Signal	DK GRN	22	4.6ft	ETB GM 12605109 pin C	M130:A14
GG	#4d	ETB TPS2 Signal	PPL	22	4.6ft	ETB GM 12605109 pin D	M130:A17
HH	#101g	CMP Sensor Ground (cond 2)	BLK	22	4.6ft	CMP pin (cond 2 of #101 cable)	M130:B16
JJ	#99g	CKP Sensor Ground (cond 2)	BLK	22	4.6ft	CKP pin (cond 2 of #99 cable)	M130:B15
KK	#99s	CKP Shield Drain	BARE	22	4.6ft	CKP shield (drain @ ECU end only)	M130:B15
LL	#103g	Knock B1 Ground (cond 2)	BLK	22	4.6ft	Knock B1 pin 2 (cond 2)	M130:B15
MM	#104g	Knock B2 Ground (cond 2)	BLK	22	4.6ft	Knock B2 pin 2 (cond 2)	M130:B16
NN	#99r	CKP 5V Reference	GRY	22	4.6ft	CKP 5V supply (3-pin Metri-Pack)	M130:A02
PP	#103s	Knock B1 Shield Drain	BARE	22	4.6ft	Knock B1 shield	M130:B15

DOES NOT PASS BULKHEAD – DIRECT FEED (R2 gauge gate / battery-class)

#21 12 AWG Radiator Fan 1 – PDM30:OUT1 (seed BH20)	#1NJ_PWR 16 AWG Inj +12V rail – ENGINE-CRITICAL, ch TBD
#22 12 AWG Radiator Fan 2 – PDM30:OUT2 (seed BH21)	#COIL_PWR 16 AWG Coil +12V rail – ENGINE-CRITICAL, ch TBD
#25 14 AWG Electric Water Pump – PDM30:OUT5 (seed BH2)	#6 0 AWG Starter Motor (battery-class)
#51 10 AWG Heater Blower Motor – PDM30:OUT6 (seed BH22)	#59 0 AWG Alternator (battery-class)
#48 16 AWG Horn – PDM30:OUT14 (seed BH23)	#63 0 AWG Battery Disconnect (battery-class)
#49 18 AWG Wiper Motor – PDM30:OUT12 (seed BH25)	#52 8 AWG Bosch iBooster feed BAT->firewall (battery-c
#85a/85b 16 AWG LED Headlight L LOW/HIGH dimmer legs (seed B	#= – AWG PDM30 main B+ feed (not a numbered v4 wire)
#86a/86b 16 AWG LED Headlight R LOW/HIGH dimmer legs (seed B	

Direct-feed wires route via firewall grommets H1-H4 with protection per K5_harness_protection_catalog.md.

#66 fuel pump / #32 amp (8 AWG) route via FLOOR to rear – they never cross the firewall.

NUKE LTD / DESERT PERFORMANCE

1977 CHEVROLET K5 BLAZER – VIN CKR187F127263


LS3 6.2L / MoTec M130 + PDM30 – CONNECTOR BUILD SHEETS

SHEET 1 OF 4 – 2026-06-10 – REV A

FACE: MILNEC 25-61 drawing (transcribed). TABLE: K5_cut_list_v4 + 2026-04-13 s
eed reconciled per rules R1-R6.

M130 ECU – CONNECTOR A (34-WAY TYCO SUPERSEAL 1.0)

PLUG TE 4-1437290-0 (MoTeC #65044) – KEY 1 – 27/34 PINS WIRED, 7 SPARE

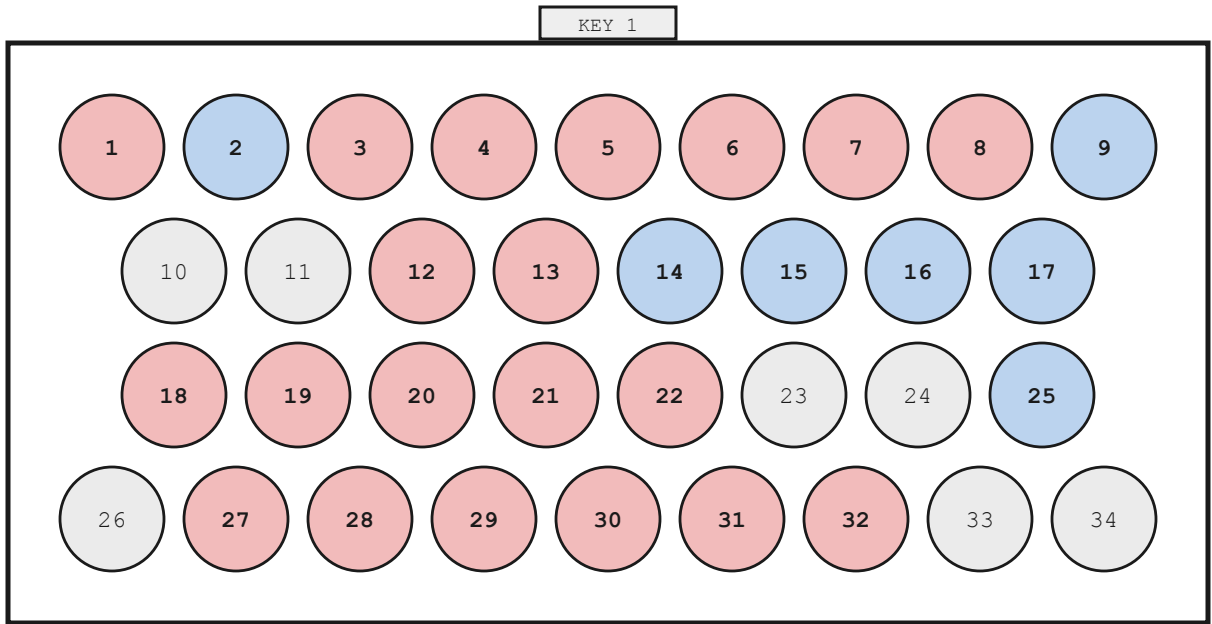

Row split 9/8/8/9 (34-pos) / 7/6/6/7 (26-pos) per TE Superseal 1.0
catalog config drawing (Dalroad mirror p.81). Pin numbers sequential per
MoTeC M130 datasheet (Part 13130) p.4-5 tables – VERIFY MOLDED CAVITY
NUMBERS ON HOUSING BEFORE PINNING.

SENSOR/AV/AT INJ/IGN/HB BAT CAN/ETH NO WIRE

CONTACTS (CONNECTOR_DATA_REPORT 2.3):
20-24 AWG signal: TE 3-1447221-4 (gold, small barrel)
16-18 AWG power: TE 3-1447221-3 (gold, normal barrel)
solid alt: ProWireUSA SSC-N (16-24 AWG). Crimp HDT-48-00.
Sealed cavity plugs in all spare positions (IP67).

PIN	FUNCTION	WIRE #	CIRCUIT	COLOR	AWG	DESTINATION / NOTE
A01	OUT_HB2	#4a	ETB TAC Motor 2	BRN	20	GM 12605109 pin A
A02	SEN_5V0_A	#4e,99r,102r,112r	5V reference rail A	GRY	22	ETB E + CKP + OPS + FPS 5V
A03	IGN_LS1	#5	Ignition Coil 3	WHT	22	DEL-Stributor central mount
A04	IGN_LS2	#7	Ignition Coil 5	WHT/WHT	22	DEL-Stributor central mount
A05	IGN_LS3	#8	Ignition Coil 7	WHT/BLK	22	DEL-Stributor central mount
A06	IGN_LS4	#9	Ignition Coil 2	WHT/RED	22	DEL-Stributor central mount
A07	IGN_LS5	#10	Ignition Coil 4	WHT/BLU	22	DEL-Stributor central mount
A08	IGN_LS6	#11	Ignition Coil 6	WHT/YEL	22	DEL-Stributor central mount
A09	SEN_5V0_B	#108r,101r	5V reference rail B	GRY	22	MAP + CMP 5V supplies
A10	BAT_NEG1	–	Battery negative	–	–	Sensor star gnd (appx G 2.3) NO ECU gnd wire in cut li
A11	BAT_NEG2	–	Battery negative	–	–	Sensor star ground (appx G 2.3)
A12	IGN_LS7	#12	Ignition Coil 8	WHT/VIO	22	DEL-Stributor central mount
A13	IGN_LS8	#24	Ignition Coil 1	WHT/ORG	22	DEL-Stributor central mount
A14	AV1	#4c	ETB TPS1 Signal	DK GRN	22	GM 12605109 pin C ETB keeps A14; 04-13 AV map STALE
A15	AV2	#108	MAP Sensor	VIO/WHT	22	ACDelco PT2293 / Bosch 3-pin
A16	AV3	#112	Fuel Pressure Sensor	VIO/BLK	22	Fuel rail pressure sender
A17	AV4	#4d	ETB TPS2 Signal	PPL	22	GM 12605109 pin D
A18	OUT_HB1	#4b	ETB TAC Motor 1	YEL	20	GM 12605109 pin B
A19	INJ_PH1	#13	Fuel Injector 1	GRN	22	EV6/USCAR @ rail cyl 1
A20	INJ_PH2	#14	Fuel Injector 2	GRN/WHT	22	EV6/USCAR @ rail cyl 2
A21	INJ_PH3	#15	Fuel Injector 3	GRN/BLK	22	EV6/USCAR @ rail cyl 3
A22	INJ_PH4	#16	Fuel Injector 4	GRN/RED	22	EV6/USCAR @ rail cyl 4
A23	INJ_LS1	–	(no wire)	–	–	–
A24	INJ_LS2	–	(no wire)	–	–	–
A25	AV5	#102	Oil Pressure (ECU)	VIO	22	OPS galley boss #102 MOVED A14->A25 per v4 receipt
A26	BAT_POS	–	(no wire)	–	–	NO M130 power-feed wire exists in cut list v4 – open gap
A27	INJ_PH5	#17	Fuel Injector 5	GRN/BLU	22	EV6/USCAR @ rail cyl 5
A28	INJ_PH6	#18	Fuel Injector 6	GRN/YEL	22	EV6/USCAR @ rail cyl 6
A29	INJ_PH7	#19	Fuel Injector 7	GRN/VIO	22	EV6/USCAR @ rail cyl 7
A30	INJ_PH8	#20	Fuel Injector 8	GRN/ORG	22	EV6/USCAR @ rail cyl 8
A31	OUT_HB3	#116	Dakota Tach Signal	WHT/BLK	22	Dakota VHX tach input (dash) spare HB as tach pulse (2
A32	OUT_HB4	#118	Dakota VSS / Speedo	WHT/YEL	22	Dakota VHX speedo input (dash) spare HB as VSS mirror
A33	OUT_HB5	–	(no wire – future provisioning)	–	–	–
A34	OUT_HB6	–	(no wire – future provisioning)	–	–	–

NUKE LTD / DESERT PERFORMANCE

1977 CHEVROLET K5 BLAZER – VIN CKR187F127263


LS3 6.2L / MoTeC M130 + PDM30 – CONNECTOR BUILD SHEETS

SHEET 2 OF 4 – 2026-06-10 – REV A

PIN FUNCTIONS: MoTeC M130 datasheet p.4-5. WIRES: K5_cut_list_v4 join (FROM co lumn) + companion addendum.

M130 ECU – CONNECTOR B (26-WAY TYCO SUPERSEAL 1.0)

PLUG TE 3-1437290-7 (MoTeC #65045) – KEY 1 – 11/26 PINS WIRED, 15 SPARE

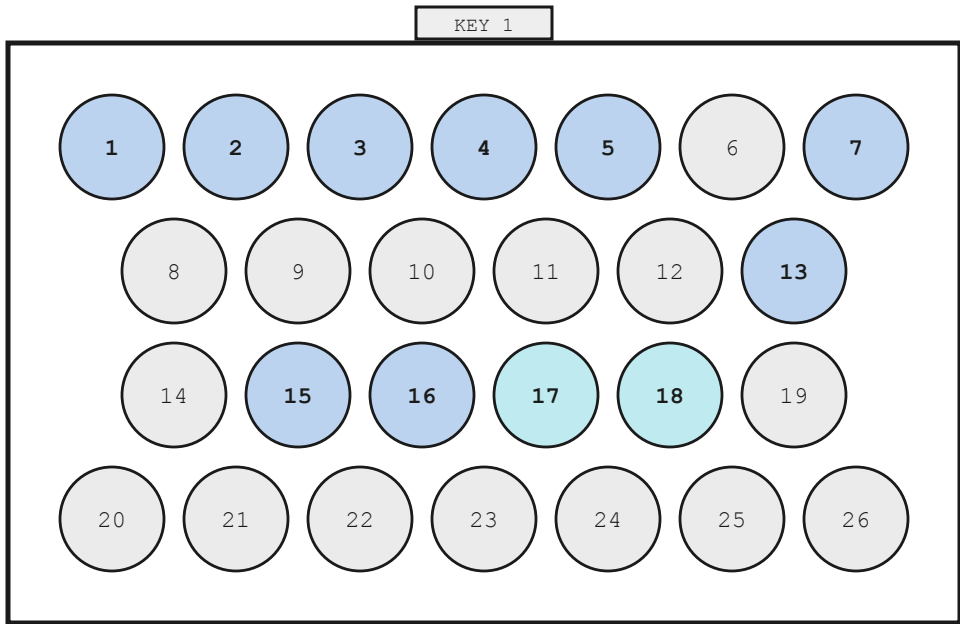

Row split 9/8/8/9 (34-pos) / 7/6/6/7 (26-pos) per TE Superseal 1.0 catalog config drawing (Dalroad mirror p.81). Pin numbers sequential per MoTeC M130 datasheet (Part 13130) p.4-5 tables – VERIFY MOLDED CAVITY NUMBERS ON HOUSING BEFORE PINNING.

■ SENSOR/AV/AT ■ INJ/IGN/HB ■ BAT ■ CAN/ETH ■ NO WIRE

CONTACTS (CONNECTOR_DATA_REPORT 2.3):
20-24 AWG signal: TE 3-1447221-4 (gold, small barrel)
16-18 AWG power: TE 3-1447221-3 (gold, normal barrel)
solid alt: ProWireUSA SSC-N (16-24 AWG). Crimp HDT-48-00.
Sealed cavity plugs in all spare positions (IP67).

PIN	FUNCTION	WIRE #	CIRCUIT	COLOR	AWG	DESTINATION / NOTE
B01	UDIG1	#99	Crank Position Sensor	BLU/WHT/WHT	22	SHLD 2C; drain -> B15 (#99s)
B02	UDIG2	#101	Cam Position Sensor	BLU/WHT/BLK	22	SHLD 2C; drain -> B16 (#101s) 2026-04-13 'camera on B0
B03	AT1	#109	Intake Air Temp Sensor	TAN	22	IAT; gnd #109g -> B15 CONFLICT: pdm_power_budget swaps
B04	AT2	#110	Coolant Temp Sensor (ECU)	TAN/WHT	22	CLT; gnd #110g -> B16 CONFLICT: see B03
B05	AT3	#113	Oil Temperature Sensor	TAN/BLK	22	OTS; gnd #113g -> B15
B06	AT4	—	(reserved – no wire)	—	—	spare AT4 – needs companion gnd when assigned (v4 KNOWN
B07	KNOCK1	#103	Knock Sensor Bank 1	GRY	22	SHLD 2C; drain -> B15
B08	UDIG3	—	(no wire)	—	—	candidate for #105/#111 A/C switches (FROM='ECU', pin TB
B09	UDIG4	—	(no wire)	—	—	—
B10	UDIG5	—	(no wire)	—	—	—
B11	UDIG6	—	(no wire)	—	—	—
B12	BAT_BAK	—	(no wire)	—	—	—
B13	KNOCK2	#104	Knock Sensor Bank 2	GRY/WHT	22	SHLD 2C; drain -> B16
B14	UDIG7	—	(no wire)	—	—	—
B15	SEN_0V_A	#4f,99g/s,103g/s,108g,109g,113g	Sensor 0V star A	BLK/BARE	22	ETB+CKP+K1 gnd/drains, MAP+IAT+OTS gnd
B16	SEN_0V_B	#101g/s,102g,104g/s,110g,112g	Sensor 0V star B	BLK/BARE	22	CMP+K2 gnd/drains, OPS+CLT+FPS gnd
B17	CAN_HI	#62	CAN Bus 1 High	WHT/GRN	24	PDM30 B26 + C125/Dakota #125 T43 stub 22 vs 24 AWG tru
B18	CAN_LO	#62	CAN Bus 1 Low	WHT/GRN	24	PDM30 B25 + C125/Dakota; 120R each end
B19	SEN_6V3	—	(no wire)	—	—	—
B20	AV6	—	(no wire)	—	—	candidate for #98 fuel level AV pin (v4 open item)
B21	AV7	—	(no wire)	—	—	—
B22	AV8	—	(no wire)	—	—	—
B23	ETH_TX+	—	(no wire – tune via UTC)	—	—	—
B24	ETH_TX-	—	(no wire)	—	—	—
B25	ETH_RX+	—	(no wire)	—	—	—
B26	ETH_RX-	—	(no wire)	—	—	—

NUKE LTD / DESERT PERFORMANCE

1977 CHEVROLET K5 BLAZER – VIN CKR187F127263


LS3 6.2L / MoTeC M130 + PDM30 – CONNECTOR BUILD SHEETS

SHEET 3 OF 4 – 2026-06-10 – REV A


PIN FUNCTIONS: MoTeC M130 datasheet p.4-5. WIRES: K5_cut_list_v4 join (FROM co lumn) + companion addendum.

PDM30 – POWER DISTRIBUTION (CONN A 34-WAY + CONN B 26-WAY + C STUD)

PLUGS: TE 4-1437290-0 / #65044 (A) + TE 3-1437290-7 / #65045 (B) – CHANNEL PLAN 2026-04-05 AUTHORITATIVE – 30/30 OUTPUTS USED

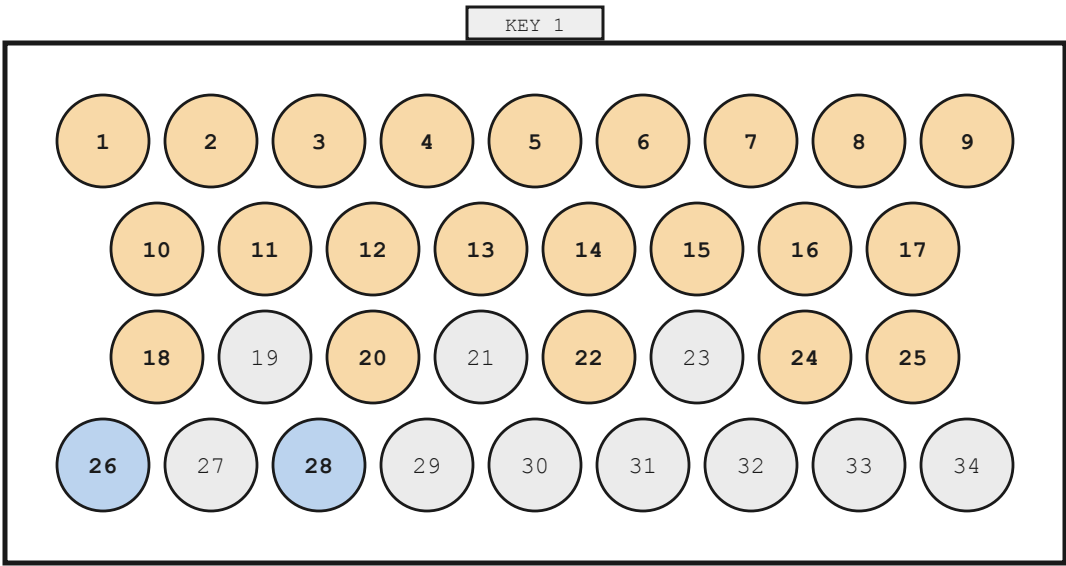

CONN A – MATING FACE (A1-A34)

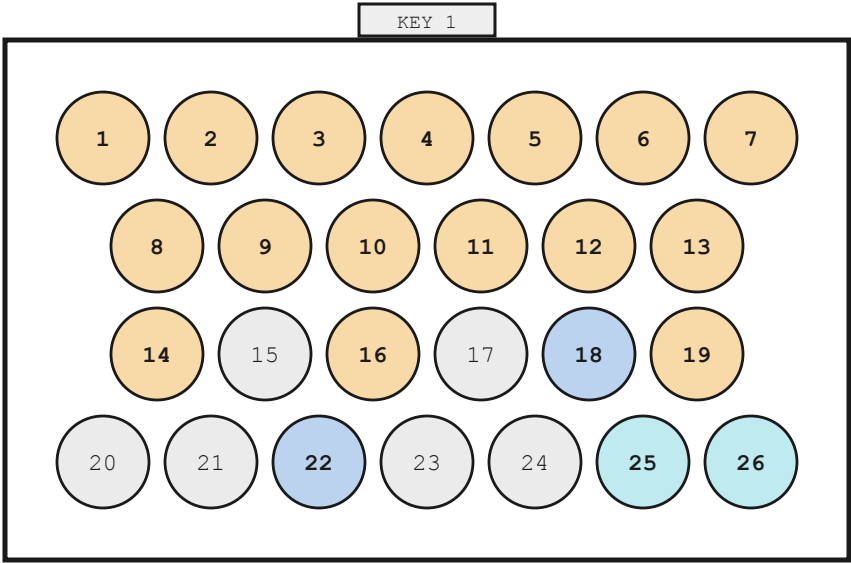

CONN B – MATING FACE (B1-B26)

OUTPUT DIG (unused) CAN VBAT-/GND

Pin->function map: PDM30 datasheet (Part 14103) via CONNECTOR_DATA_REPORT 2.5. 20A outputs use PAIRED pins – both wires routed together. C1 = M6 stud, VBATT+ main feed.

DIG pin numbers shown gray: no discrete switch-input wires exist in cut list v4 (keypad is CAN).

CH	RATE	DEVICE / GROUP	AMPS	WIRE #	COLOR	AWG	PINS
OUT1	20A	Radiator Fan 1	18A	#21	ORN/WHT	12	A1+A10
OUT2	20A	Radiator Fan 2	18A	#22	ORN/BLK	12	A3+A12
OUT3	20A	Power Window Motor Left	15A	#34	DK BLU	16	A5+A14
OUT4	20A	Power Window Motor Right	15A	#35	DK BLU/WHT	16	A7+A16
OUT5	20A	Electric Water Pump	12A	#25	ORN/BLU	14	A9+A17
OUT6	20A	Heater Blower Motor	12A	#51	ORN/BLK/BLU	10	B3+B9
OUT7	20A	Electric Parking Brake (E-Stopp) #126 dash trigger landed, button FN TBD	10A	#54	ORN/BLK/YEL	16	B5+B11
OUT8	20A	Cigarette Lighter / 12V Outlet	10A	#72	ORN/ORG	14	B7+B13
OUT9	8A	AMP Research Step Left	8A	#1	ORN/BLK	18	A2
OUT10	8A	AMP Research Step Right	8A	#2	ORN/BLK/WHT	18	A4
OUT11	8A	AMP Research Controller	2A	#3	ORN/BLK/BLK	22	A6
OUT12	8A	Windshield Wiper Motor	6A	#49	PPL	18	A8
OUT13	8A	park_tail group (4 fixtures)	1.6A	#75,81,83,84	BRN/*	22	A11
OUT14	8A	Horn	5A	#48	ORN/ORG	16	A13
OUT15	8A	backup group (+3rd brake +camera)	3.5A	#76,89,93,97	BRN/*,BLU/WHT	22	A15
OUT16	8A	A/C Compressor Clutch BULKHEAD cavity A (sheet 1)	4A	#23	ORN/RED	20	A18
OUT17	8A	LED Headlight L (-> dimmer COMMON) legs #88a/b 16 AWG = direct feed (sheet 1)	3.6A	#85	LT GRN	20	A20
OUT18	8A	LED Headlight R (-> dimmer COMMON)	3.6A	#86	LT GRN/WHT	20	A22
OUT19	8A	markers_clearance group (8 fixtures)	1.3A	#77,78,79,87,88,90,91,92	BRN/*	22	A24
OUT20	8A	Radio / Head Unit	3A	#31	ORN/BLK	22	A25
OUT21	8A	Power Lock Actuator Left	3A	#38	BLK	20	B1
OUT22	8A	Power Lock Actuator Right	3A	#47	BLK/WHT	20	B2
OUT23	8A	Transmission Controller (T43)	3A	#58	ORN/YEL	22	B4
OUT24	8A	Wideband Lambda Controller BULKHEAD cavity c (sheet 1)	3A	#64	ORN/BLK	22	B6
OUT25	8A	interior_courtesy group (5 fixtures)	2.5A	#67,68,69,73,74	BRN/*	22	B8
OUT26	8A	Washer Pump BULKHEAD cavity a (sheet 1)	2A	#50	ORN/BLK/RED	22	B10
OUT27	8A	Turn Signal Left Front	2A	#80 (+#119 tap)	LT BLU	22	B12
OUT28	8A	Turn Signal Right Front	2A	#82 (+#120 tap)	DK BLU	22	B14
OUT29	8A	Display / Dash (MoTeC C125) #124 color collides #117 – fix at mockup	1A	#65 (+#124 splice)	ORN/RED	22	B16
OUT30	8A	USB Charging Port	1A	#70	ORN/YEL	22	B19
VBATT-	–	Battery negative	–	–	–	–	A26,B18
GND	–	0 V	–	–	–	–	A28,B22
DIG1-16	–	Switch inputs (none assigned in v4) keypad is CAN (#57); no DIG wires in v4	–	–	–	–	A19-34,B15-24
CAN	–	CAN Hi / CAN Lo	–	#62 trunk	WHT/GRN	24	B26,B25
C1 STUD	–	VBATT+ main feed (M6 stud) main B+ feed wire MISSING from v4 – sheet 1	–	– (not in v4)	–	–	C1

POWER RAILS – PDM CHANNEL TBD (orange): #INJ_PWR (16 AWG, 8x EV6 @ rail), #COIL_PWR (16 AWG, 8x D510C @ bracket)

PDM-FED, CHANNEL NOT IN v4: #55 t-case ind · #56 neutral sw · #57 reverse sw · #71 Dakota cluster · #94 fuel pump rly · #95 iBooster rly

Stale 2026-04-13 spec channel map (E-Stopp ch7/8, QTP cutouts, keypad ch30) superseded by the 2026-04-05 authoritative plan above.

NUKE LTD / DESERT PERFORMANCE

1977 CHEVROLET K5 BLAZER – VIN CKR187F127263

LS3 6.2L / MoTeC M130 + PDM30 – CONNECTOR BUILD SHEETS

SHEET 4 OF 4 – 2026-06-10 – REV A

CHANNELS: K5_pdm30_channel_plan.md (2026-04-05). PINS: PDM30 datasheet Part 14
103. WIRES: K5_cut_list_v4.