


SECTION 3 – DASH & CONTROLS

PDM30 + M130 → COLUMN / DASH SWITCHES / DAKOTA VHX / C125 / RADIO / TCU / E-STOPP BUTTON

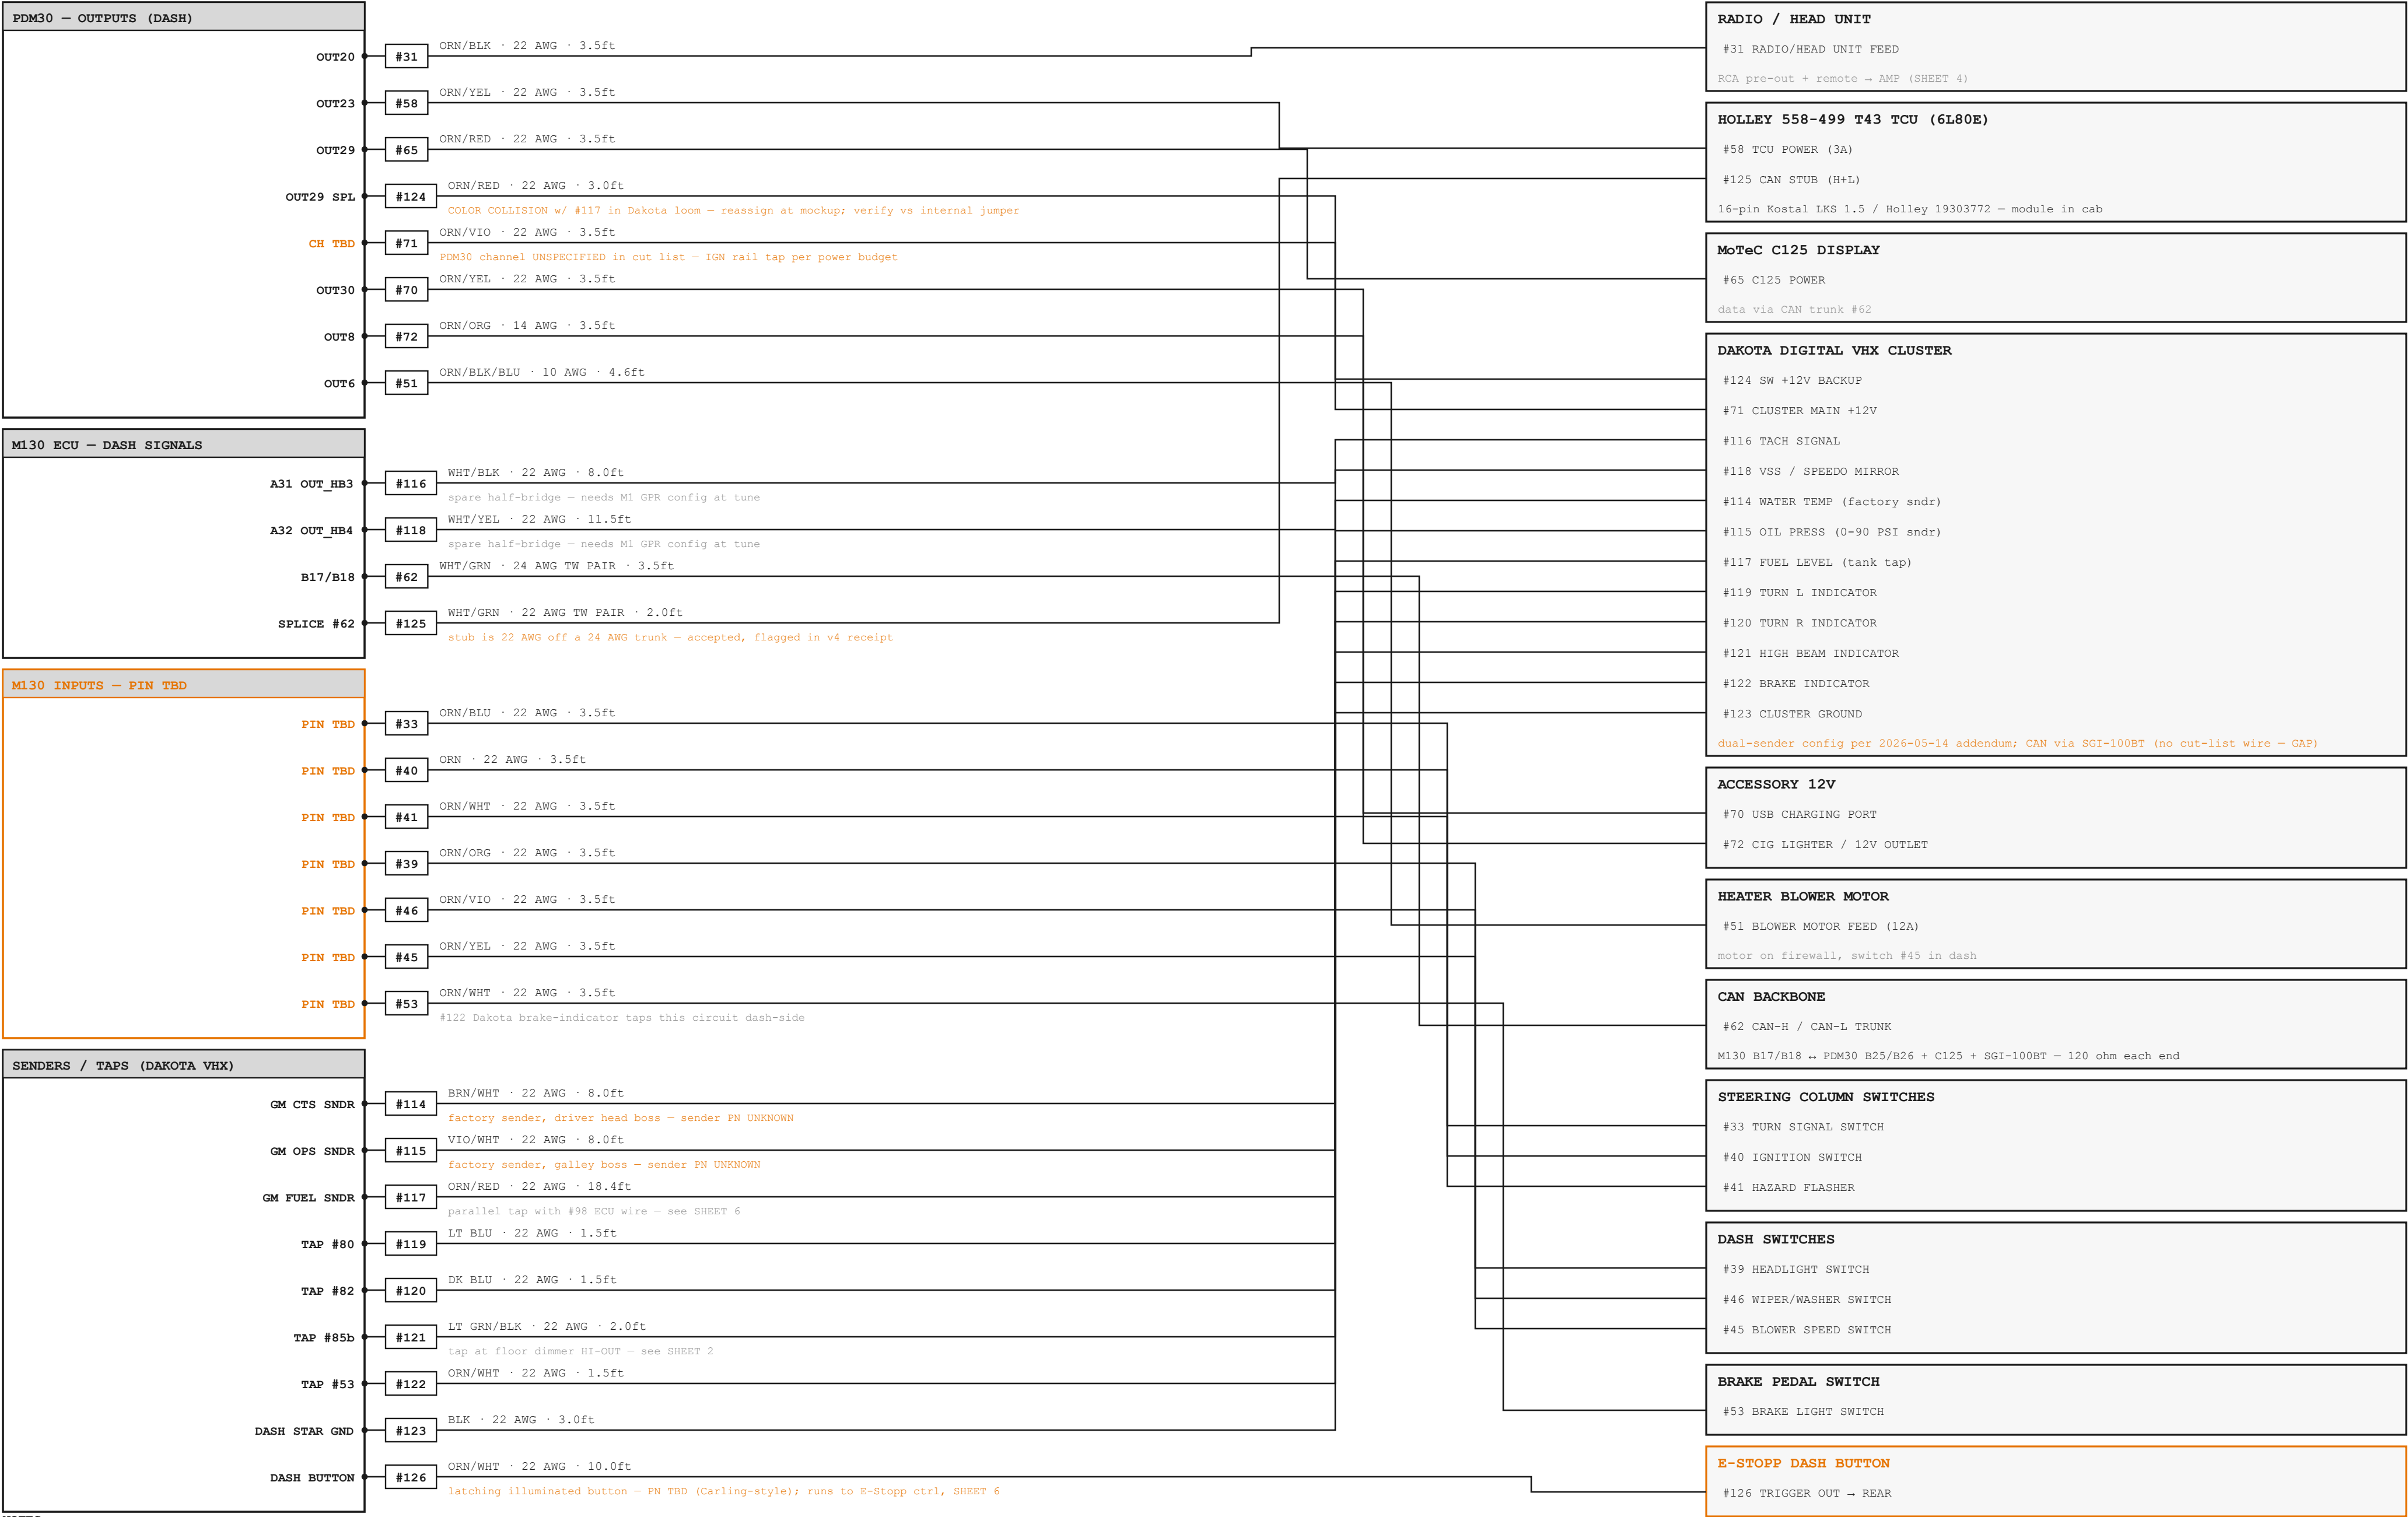

NOTES:

All M130 'PIN TBD' rows: cut list v4 gives FROM=ECU with no pin – switch/digital input pin map is an open item (pinout sheet 1 note).
Engine-loom circuits (coils, injectors, engine sensors) are on existing S2 pages – K5_S2_P1/P2/P3.

LEGEND: — wire run (id in box, COLOR · AWG · LEN on run) ◯ grommet / boot pass-through [---] physical boundary ORANGE = CONFLICT / TBD GRAY = cross-ref other sheet

NUKE LTD / DESERT PERFORMANCE

1977 CHEVROLET K5 BLAZER – VIN CKR187F127263


SYSTEM SCHEMATICS – SECTION 3 – DASH & CONTROLS

SHEET 1 OF 6 – 2026-06-09 – REV A

DERIVED FROM K5_out_list_v4 + pdm30 channel plan (2026-04-05 AUTH) + wire_paths + subsystems.json + objectTraits grounds


SECTION 4 – EXTERIOR LIGHTING

PDM30 OUT13/15/17/18/19/27/28 → FRONT FIXTURES + FLOOR-DIMMER HIGH-BEAM TOPOLOGY (REAR FIXTURES ON SHEET 6)

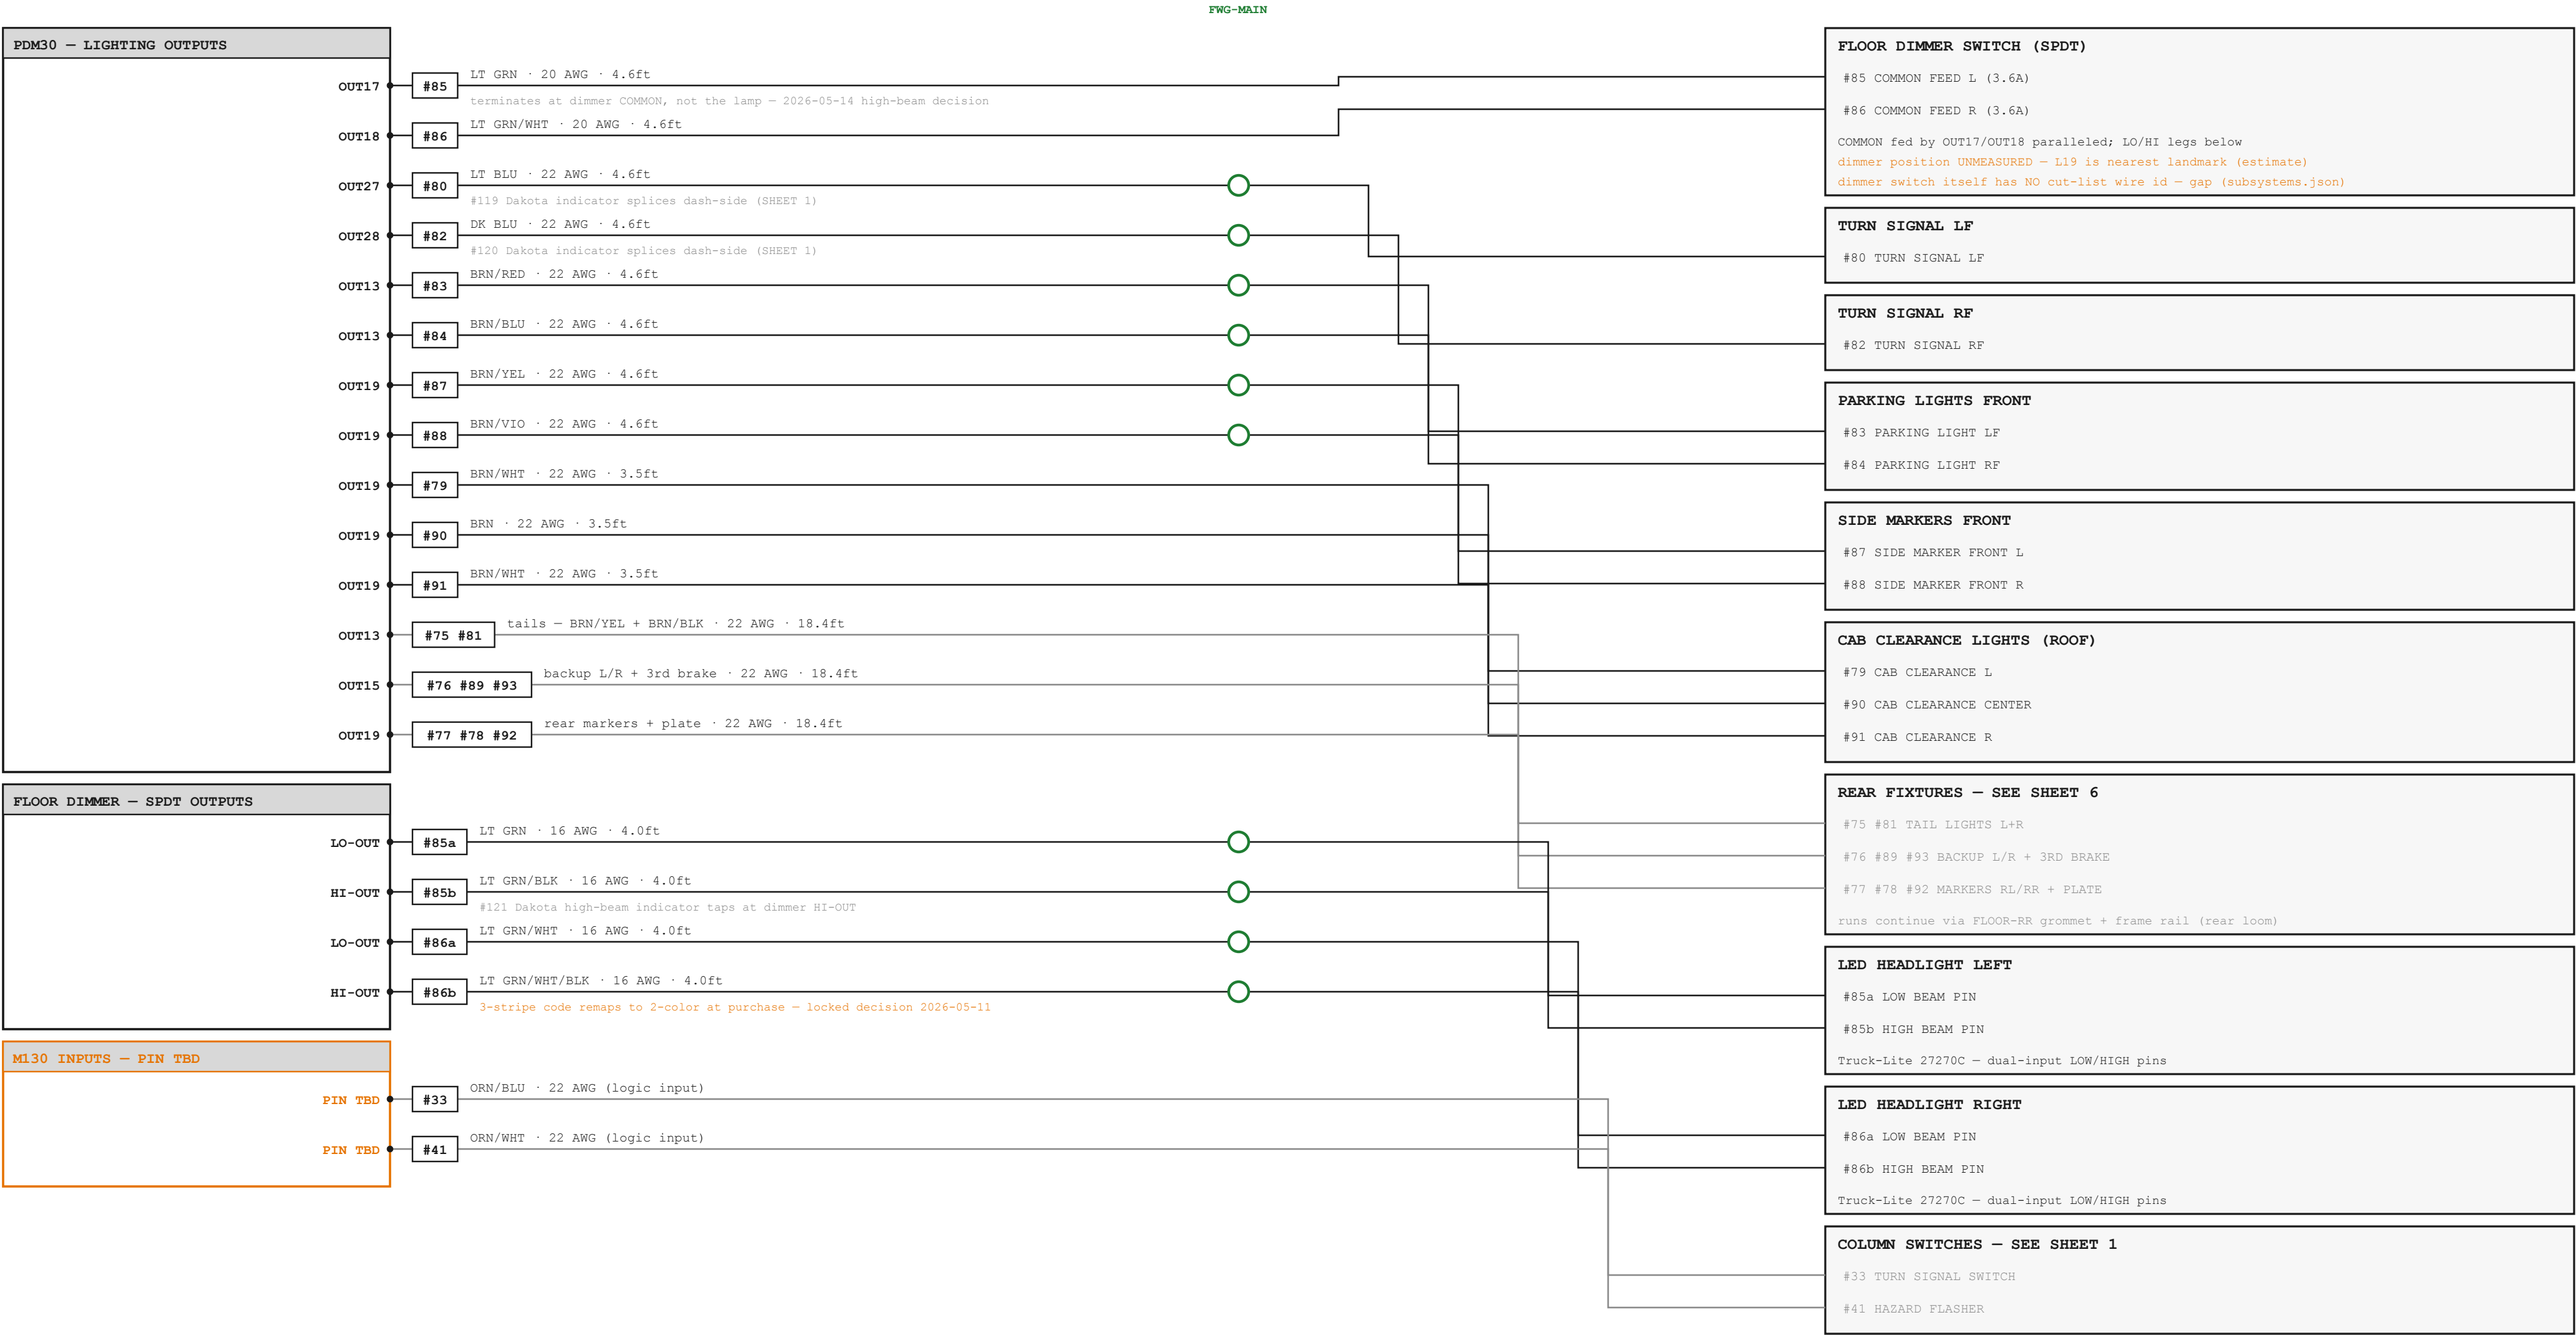

SECTION 5 – DOORS & INTERIOR

PDM30 OUT3/4/21/22/25 + AMP CH1/CH2 + M130 INPUTS → DOOR LOOMS (BOOTS) + DOME/COURTESY

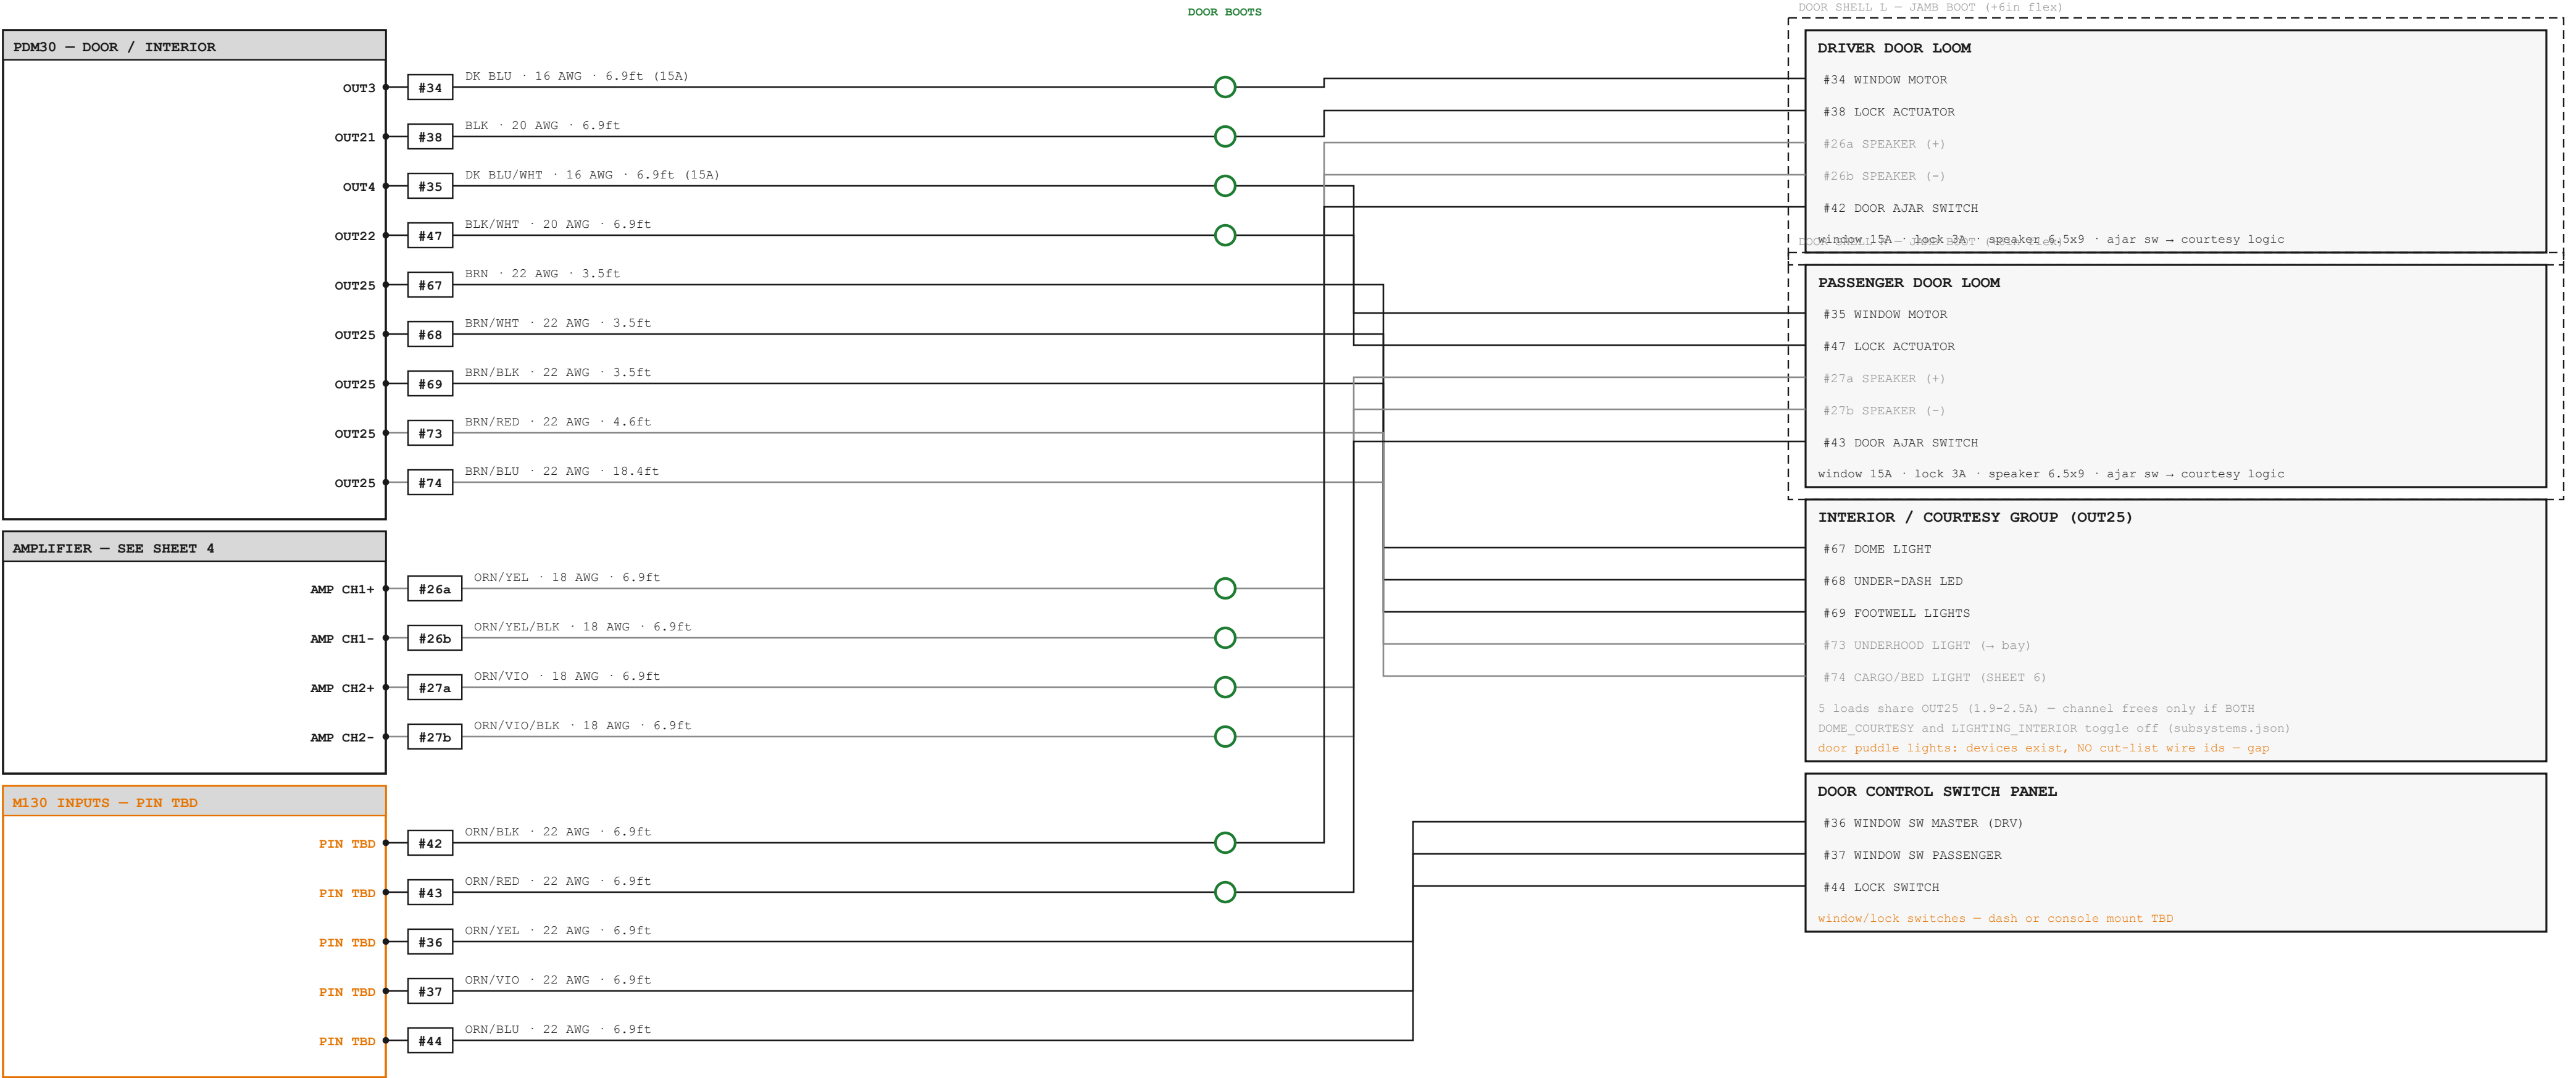

NOTES:

Door crossings (#34 #35 #38 #47 #26x #27x #42 #43) carry door_crossing flag: +6in boot flex allowance (wire_paths.yaml).


Door jamb boots required by POWER_WINDOWS / POWER_LOCKS / AUDIO front / DOME_COURTESY – HARNESS_INFRA dependency rule.

LEGEND: — wire run (id in box, COLOR · AWG · LEN on run) ○ grommet / boot pass-through [---] physical boundary ORANGE = CONFLICT / TBD GRAY = cross-ref other sheet

NUKE LTD / DESERT PERFORMANCE
1977 CHEVROLET K5 BLAZER – VIN CKR187F127263
SYSTEM SCHEMATICS – SECTION 5 – DOORS & INTERIOR
SHEET 3 OF 6 – 2026-06-09 – REV A
DERIVED FROM K5_out_list_v4 + pdm30 channel plan (2026-04-05 AUTH) + wire_paths + subsystems.json + objectTraits grounds

SECTION 6 – AUDIO

BATTERY (FUSED) + OUT20 + AMP CHANNELS → HEAD UNIT / AMP / 4 SPEAKERS / SUB

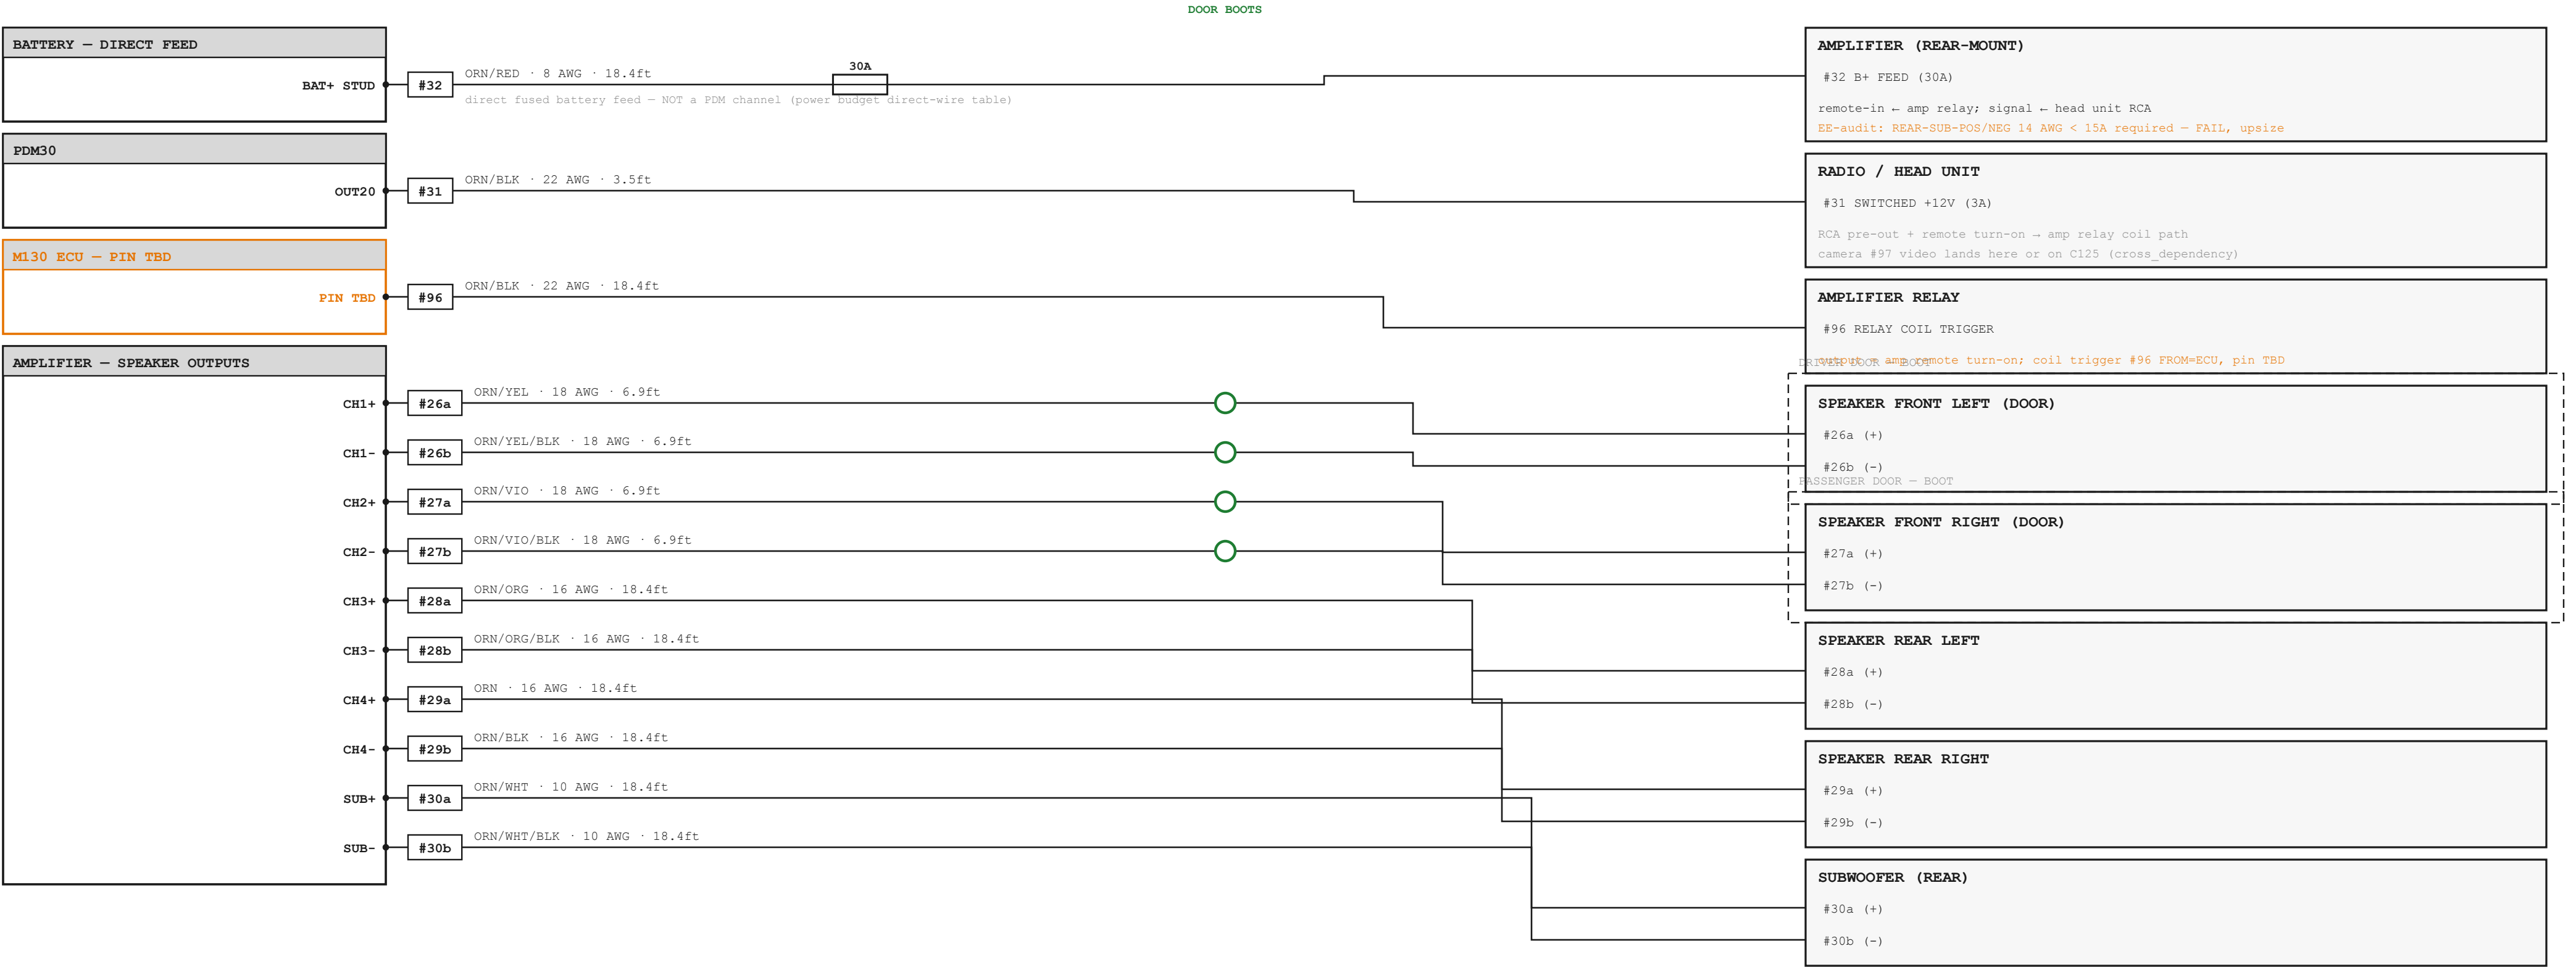

NOTES:

- Amp feed #32 + rear speaker/sub runs share the FLOOR-RR + frame-rail trunk with the rear loom (SHEET 6).
- Speaker wires carry no battery amps – amp 30A + head unit 3A are the only supply loads (subsystems.json AUDIO).

LEGEND: — wire run (id in box, COLOR · AWG · LEN on run) ○ grommet / boot pass-through [---] physical boundary ORANGE = CONFLICT / TBD GRAY = cross-ref other sheet

NUKE LTD / DESERT PERFORMANCE
1977 CHEVROLET K5 BLAZER – VIN CKR187F127263
SYSTEM SCHEMATICS – SECTION 6 – AUDIO
SHEET 4 OF 6 – 2026-06-09 – REV A
DERIVED FROM K5_out_list_v4 + pdm30 channel plan (2026-04-05 AUTH) + wire_paths + subsystems.json + objectTraits grounds

SECTION 7 – CHASSIS / POWER & GROUNDS

BATTERY (SIDE TBD) → DISCONNECT → STARTER / ALTERNATOR / PDM30 / ECU + STAR GROUND SYSTEM + FUEL / iBOOSTER / TRANS

TUNNEL (L28)

BATTERY – SIDE TBD

BAT+

BATTERY DISCONNECT – LOAD SIDE

LOAD

LOAD

LOAD

LOAD

LOAD

LOAD

LOAD

PDM30 – CHASSIS OUTPUTS

CH TBD

CH TBD

CH TBD

CH TBD

CH TBD

OUT1

OUT2

OUT5

OUT9

OUT10

OUT11

GROUND SYSTEM – STAR (BAT NEG)

STAR_BAT_CHASSIS

STAR_BAT_ENG

STAR_ENG_FRAME

STAR_ECM_HEAD

G3 CAB STRAP

G4

G5

G6

G8

COIL_GND

NOTES:

Ground star topology + gauges from objectTraits.ts ground_points (G3-G8 factory points, STAR_* LS-swap legs).

Unspecified PDM channels (#94 #95 #55 #56 #57, INJ_PWR, COIL_PWR, #71) – but authoritative plan uses 30/30 channels: assignment requires regrouping. OPEN.

BATTERY DISCONNECT (190A)

#63 MASTER DISCONNECT IN

battery POSITION: SIDE TBD – not yet decided

STARTER MOTOR

#6 STARTER STUD

ALTERNATOR

#59 ALTERNATOR B+ (source)

250A (harness spec) vs 220A (channel plan) vs 150A Powermaster 47294

power budget continuous 299A → headroom NEGATIVE -49A on 250A unit

PDM30 BAT+ / BAT- FEED

BAT+ PDM30 BAT+ / BAT-

M130 ECU POWER

#60 M130 POWER

BOSCH iBOOSTER (BRAKE)

#52 B+ FEED via relay

dedicated relay (coil #95) – 40A peak

AMPLIFIER – SEE SHEET 4

#32 AMPLIFIER – SHEET 4

FUEL PUMP (TANK, REAR)

#66 PUMP FEED via relay

switched by Aeromotive 16301 relay (coil #94) – run continues SHEET 6

FUEL PUMP RELAY

#94 RELAY COIL (Aeromotive 16301)

iBOOSTER RELAY

#95 RELAY COIL

6L80E / T-CASE SWITCHES

#55 TRANSFER CASE INDICATOR

#56 NEUTRAL SAFETY SWITCH

#57 REVERSE LIGHT SWITCH

through tunnel grommet (L28)

COOLING (FANS + EWP)

#21 RADIATOR FAN 1

#22 RADIATOR FAN 2

#25 ELECTRIC WATER PUMP

AMP RESEARCH POWER STEPS

#1 AMP RESEARCH STEP L

#2 AMP RESEARCH STEP R

#3 AMP RESEARCH CONTROLLER

FRAME / CHASSIS RAIL

STAR_BAT_CHASSIS leg

STAR_ENG_FRAME leg

ENGINE BLOCK (LS3)

STAR_BAT_ENG leg

STAR_ECM_HEAD leg

#COIL_GND COIL GND RAIL (8x D510C)

CAB (RUBBER-ISOLATED)

G3 – ALL cab electrical

G4 – cab-to-frame bond

G5 – interior/HVAC loads

CORE SUPPORT

G6 – headlights/park/horn

NUKE LTD / DESERT PERFORMANCE

1977 CHEVROLET K5 BLAZER – VIN CKR187F127263

SYSTEM SCHEMATICS – SECTION 7 – CHASSIS / POWER & GROUNDS

SHEET 5 OF 6 – 2026-06-09 – REV A


DERIVED FROM K5_out_list_v4 + pdm30 channel plan (2026-04-05 AUTH) + wire_paths + subsystems.json + objectTraits grounds

LEGEND: — wire run (id in box, COLOR · AWG · LEN on run) ◯ grommet / boot pass-through [---] physical boundary ORANGE = CONFLICT / TBD GRAY = cross-ref other sheet

SECTION 8 – REAR LOOM

PDM30 + DASH → FLOOR-RR GROMMET → FRAME-RAIL TRUNK → REAR JUNCTION → TAIL / MARKERS / CAMERA / FUEL / E-STOPP

FLOOR-RR (L24) — DRIVER FRAME RAIL TRUNK —

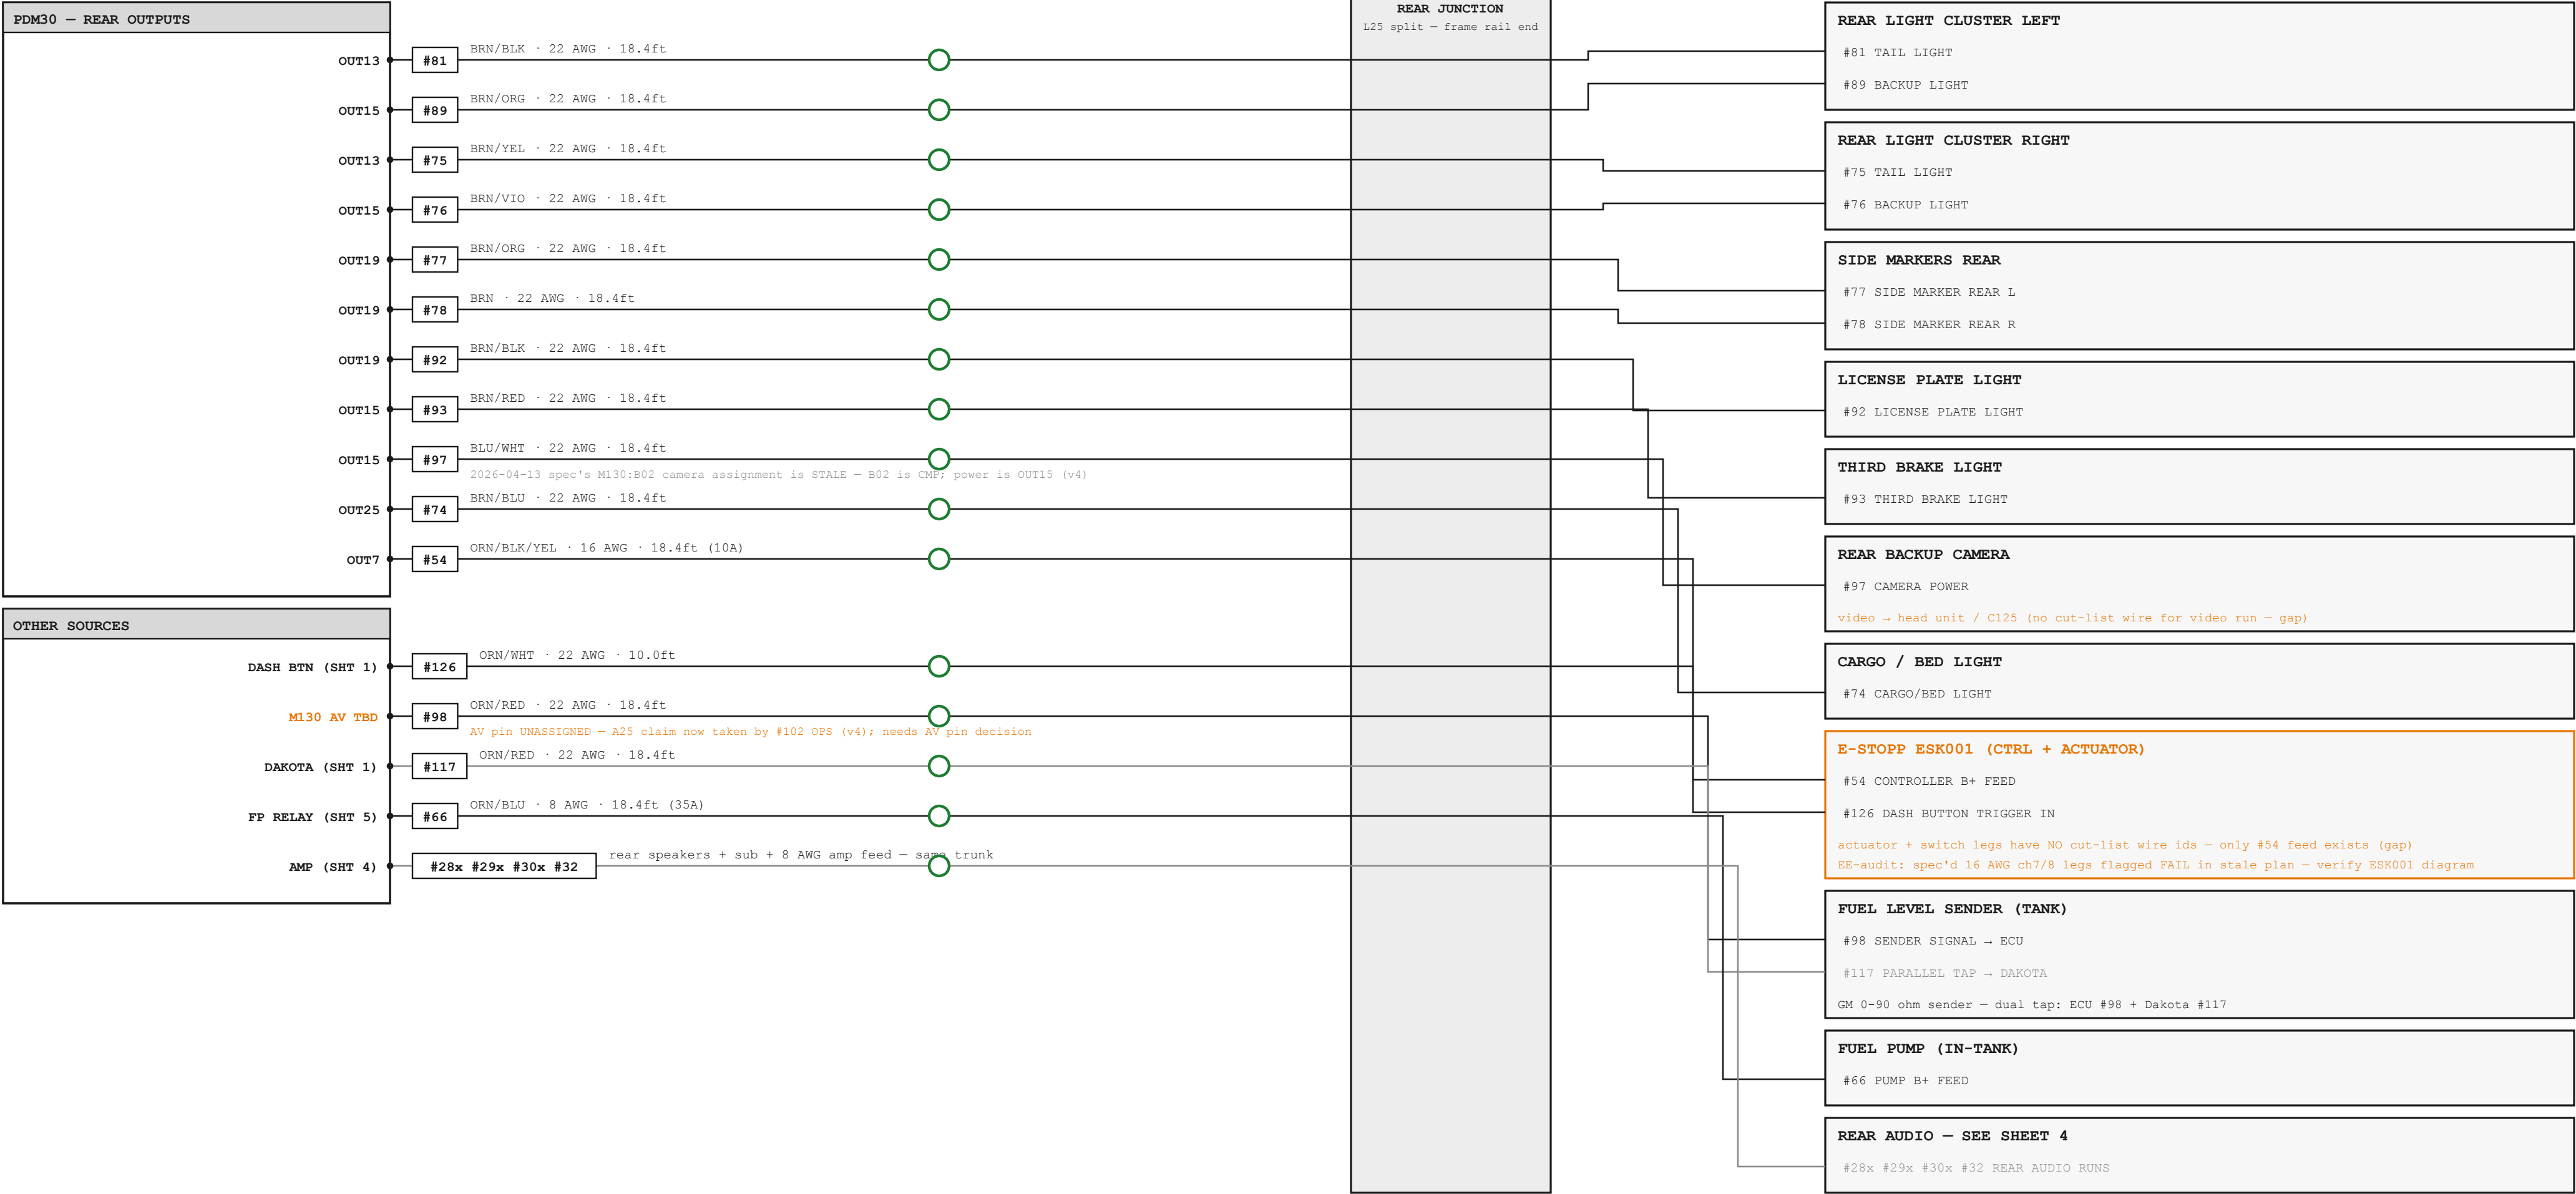

NOTES:

TRUNK: PDM30 → FLOOR-RR grommet (L24, under driver seat / rocker entry) → DRIVER FRAME RAIL, clipped every 12in → rear junction (L25 split) → L26 tailgate / L27 tank.

Rear junction is a HARNESS_INFRA item – required by FUEL / AUDIO rear / LIGHTING rear / CAMERA / E-STOPP / AMP_STEPS (subsystems.json).

LEGEND: — wire run (id in box, COLOR · AWG · LEN on run) ○ grommet / boot pass-through [---] physical boundary ORANGE = CONFLICT / TBD GRAY = cross-ref other sheet

NUKE LTD / DESERT PERFORMANCE

1977 CHEVROLET K5 BLAZER – VIN CKR187F127263

SYSTEM SCHEMATICS – SECTION 8 – REAR LOOM

SHEET 6 OF 6 – 2026-06-09 – REV A

DERIVED FROM K5_out_list_v4 + pdm30 channel plan (2026-04-05 AUTH) + wire_paths + subsystems.json + objectTraits grounds