



KYCON, Inc. 305 Digital Drive, Morgan Hill, CA 95037 (408)494-0330

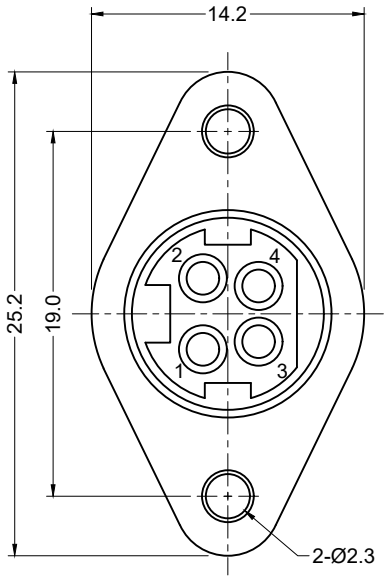

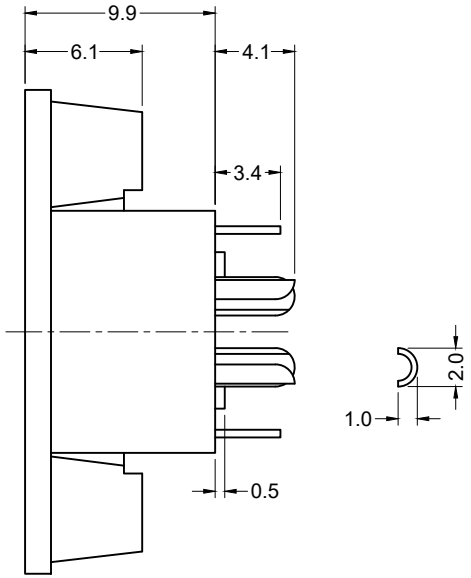

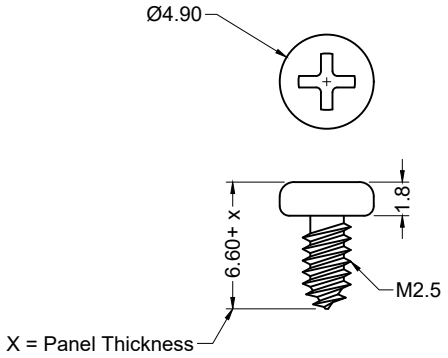

Recommended Mounting Screw



Recommended PCB Layout

Material and Finish

Body: PBT Thermoplastic,
UL94V-0 Rated
Color: Black

Contacts:
Pins: Brass, Tin Plated
Ground: Brass, Tin Plated

Electrical Characteristics

Contact Rating (Per Pin):
7.5A Max. @ 48V DC

Insulation Resistance:
50 Megohms Min @ 250V DC

Dielectric Withstanding Voltage:
500V AC RMS for 1 Minute

Contact Resistance:
30 milliohms Max.

Mechanical Characteristics

Operating Temperature:
-40°C to 75°C

Note:
Recommended for use
with Kycon KPPX plug.

RoHS COMPLIANT

c UL us E140125

Tolerances
X.X ± 0.35 X.XX ± 0.25 Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY
B11	08/12/16	ECO #16-021	H. MA	W. Cook
B12	10/05/18	ECO #18-051	G. Serrato	D. Shehan
B13	03/18/19	ECO #19-028	C. Kelleher	D. Shehan
C0	05/06/19	ECO #19-043	C. Kelleher	D. Shehan
C1	10/21/21	ECO #21-019	C. Kelleher	C. Furumasu
C2	01/08/26	ECO #26-001	K.Wang	C. Kelleher

DRAWN BY	DATE
A. Frederick	05/09/07
	UNITS
	mm

KPJX-PM-4S

Power Jack, RoHS Compliant

4 Pin, Non-Shielded, Panel Mount

KYCON