



A

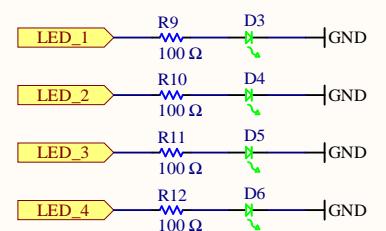

B

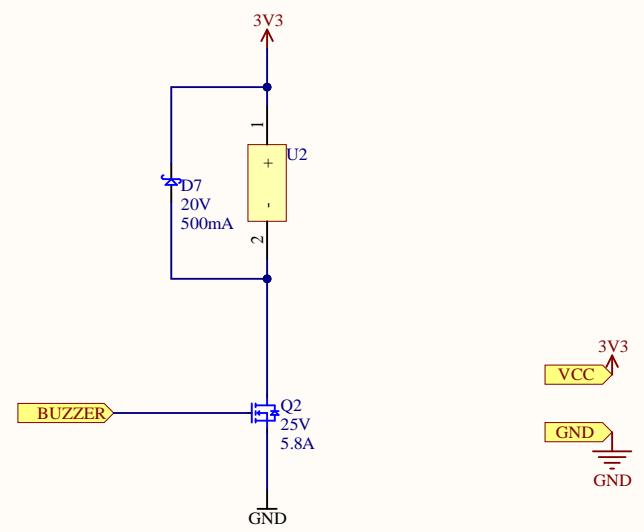

C


Title <i>External Indicators</i>		
Size: A4	Number:*	Revision:*
Date: 5/3/2022	Time: 12:26:10 AM	Sheet 5 of 6
File: C:\Users\flynn\Desktop\StratoChovy-EE\Blink_Blink_Beep_Boop.SchDoc		*


A

B

C


D

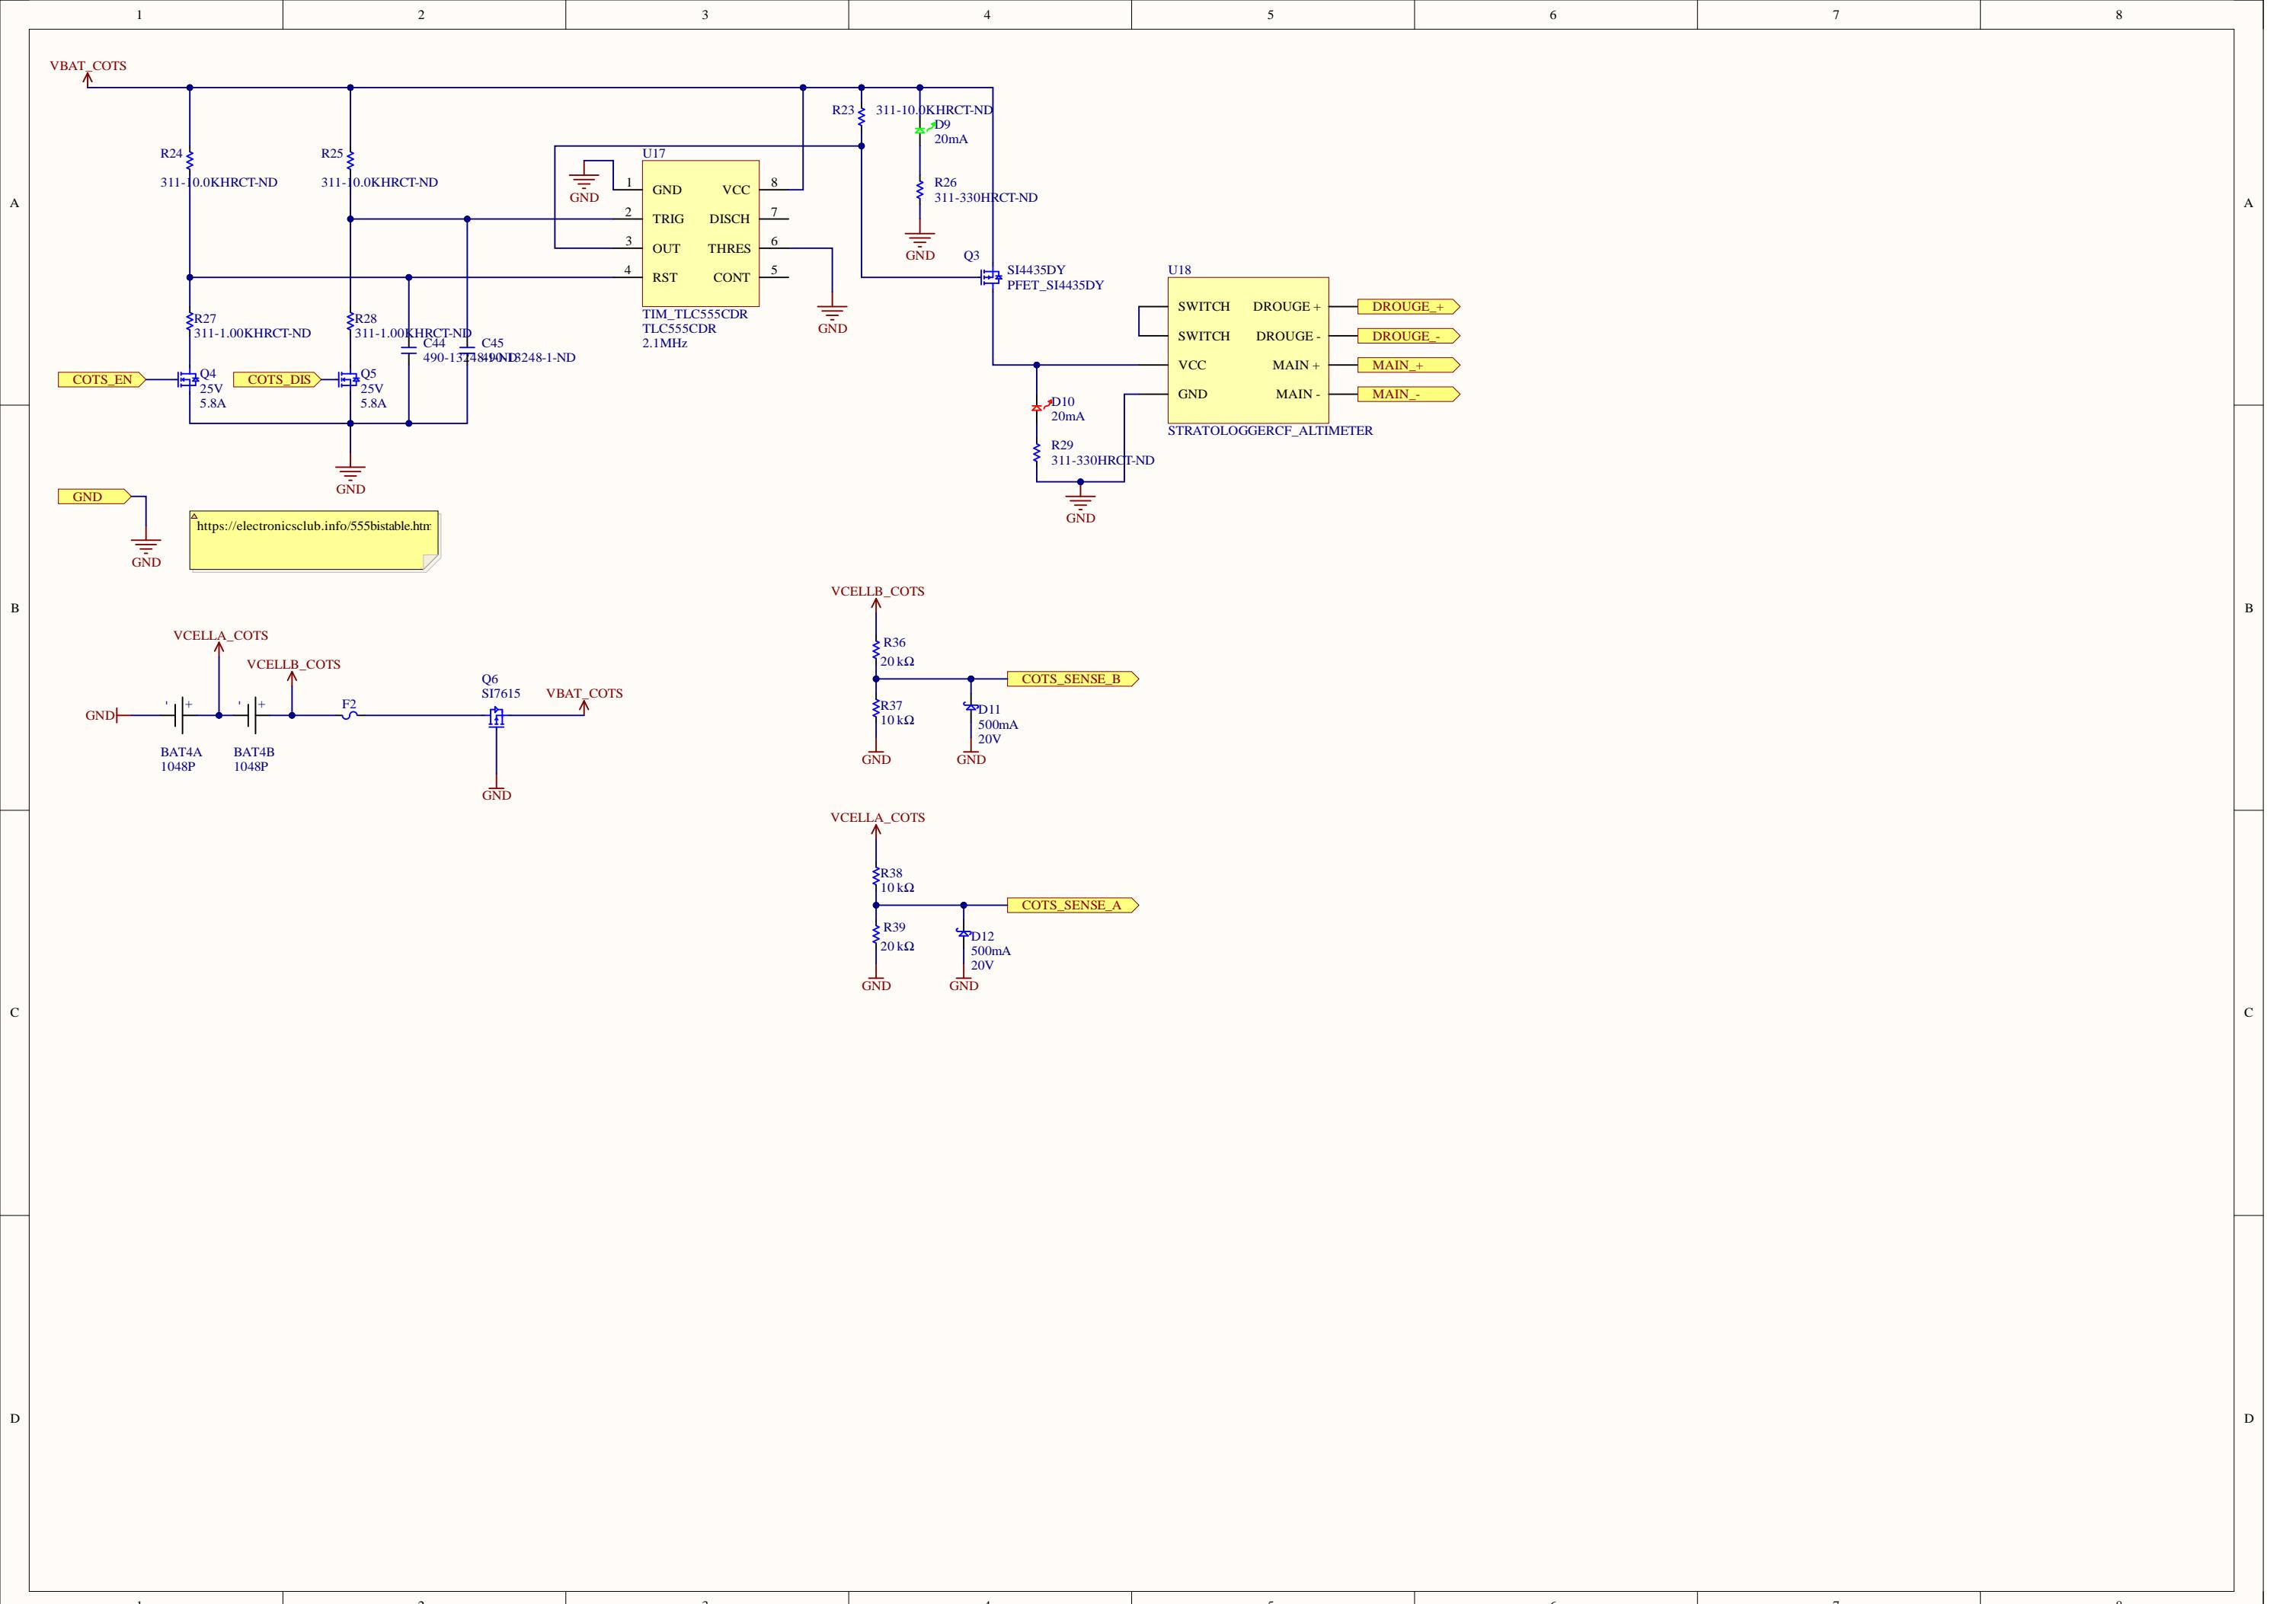


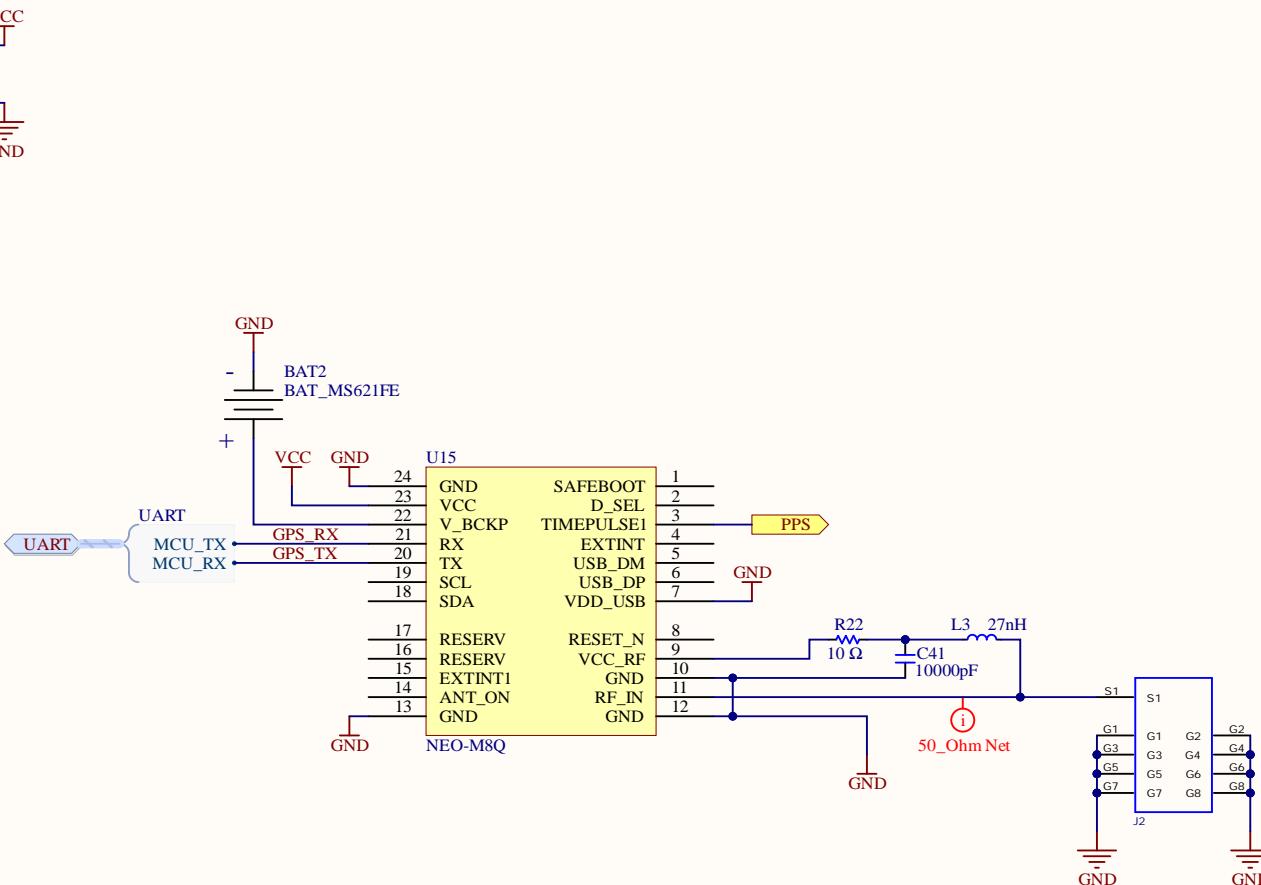



Title

Size A	Number	Revision
Date:	5/03/2022	Sheet of
File:	C:\Users\ \GPS SchDoc	Drawn By:

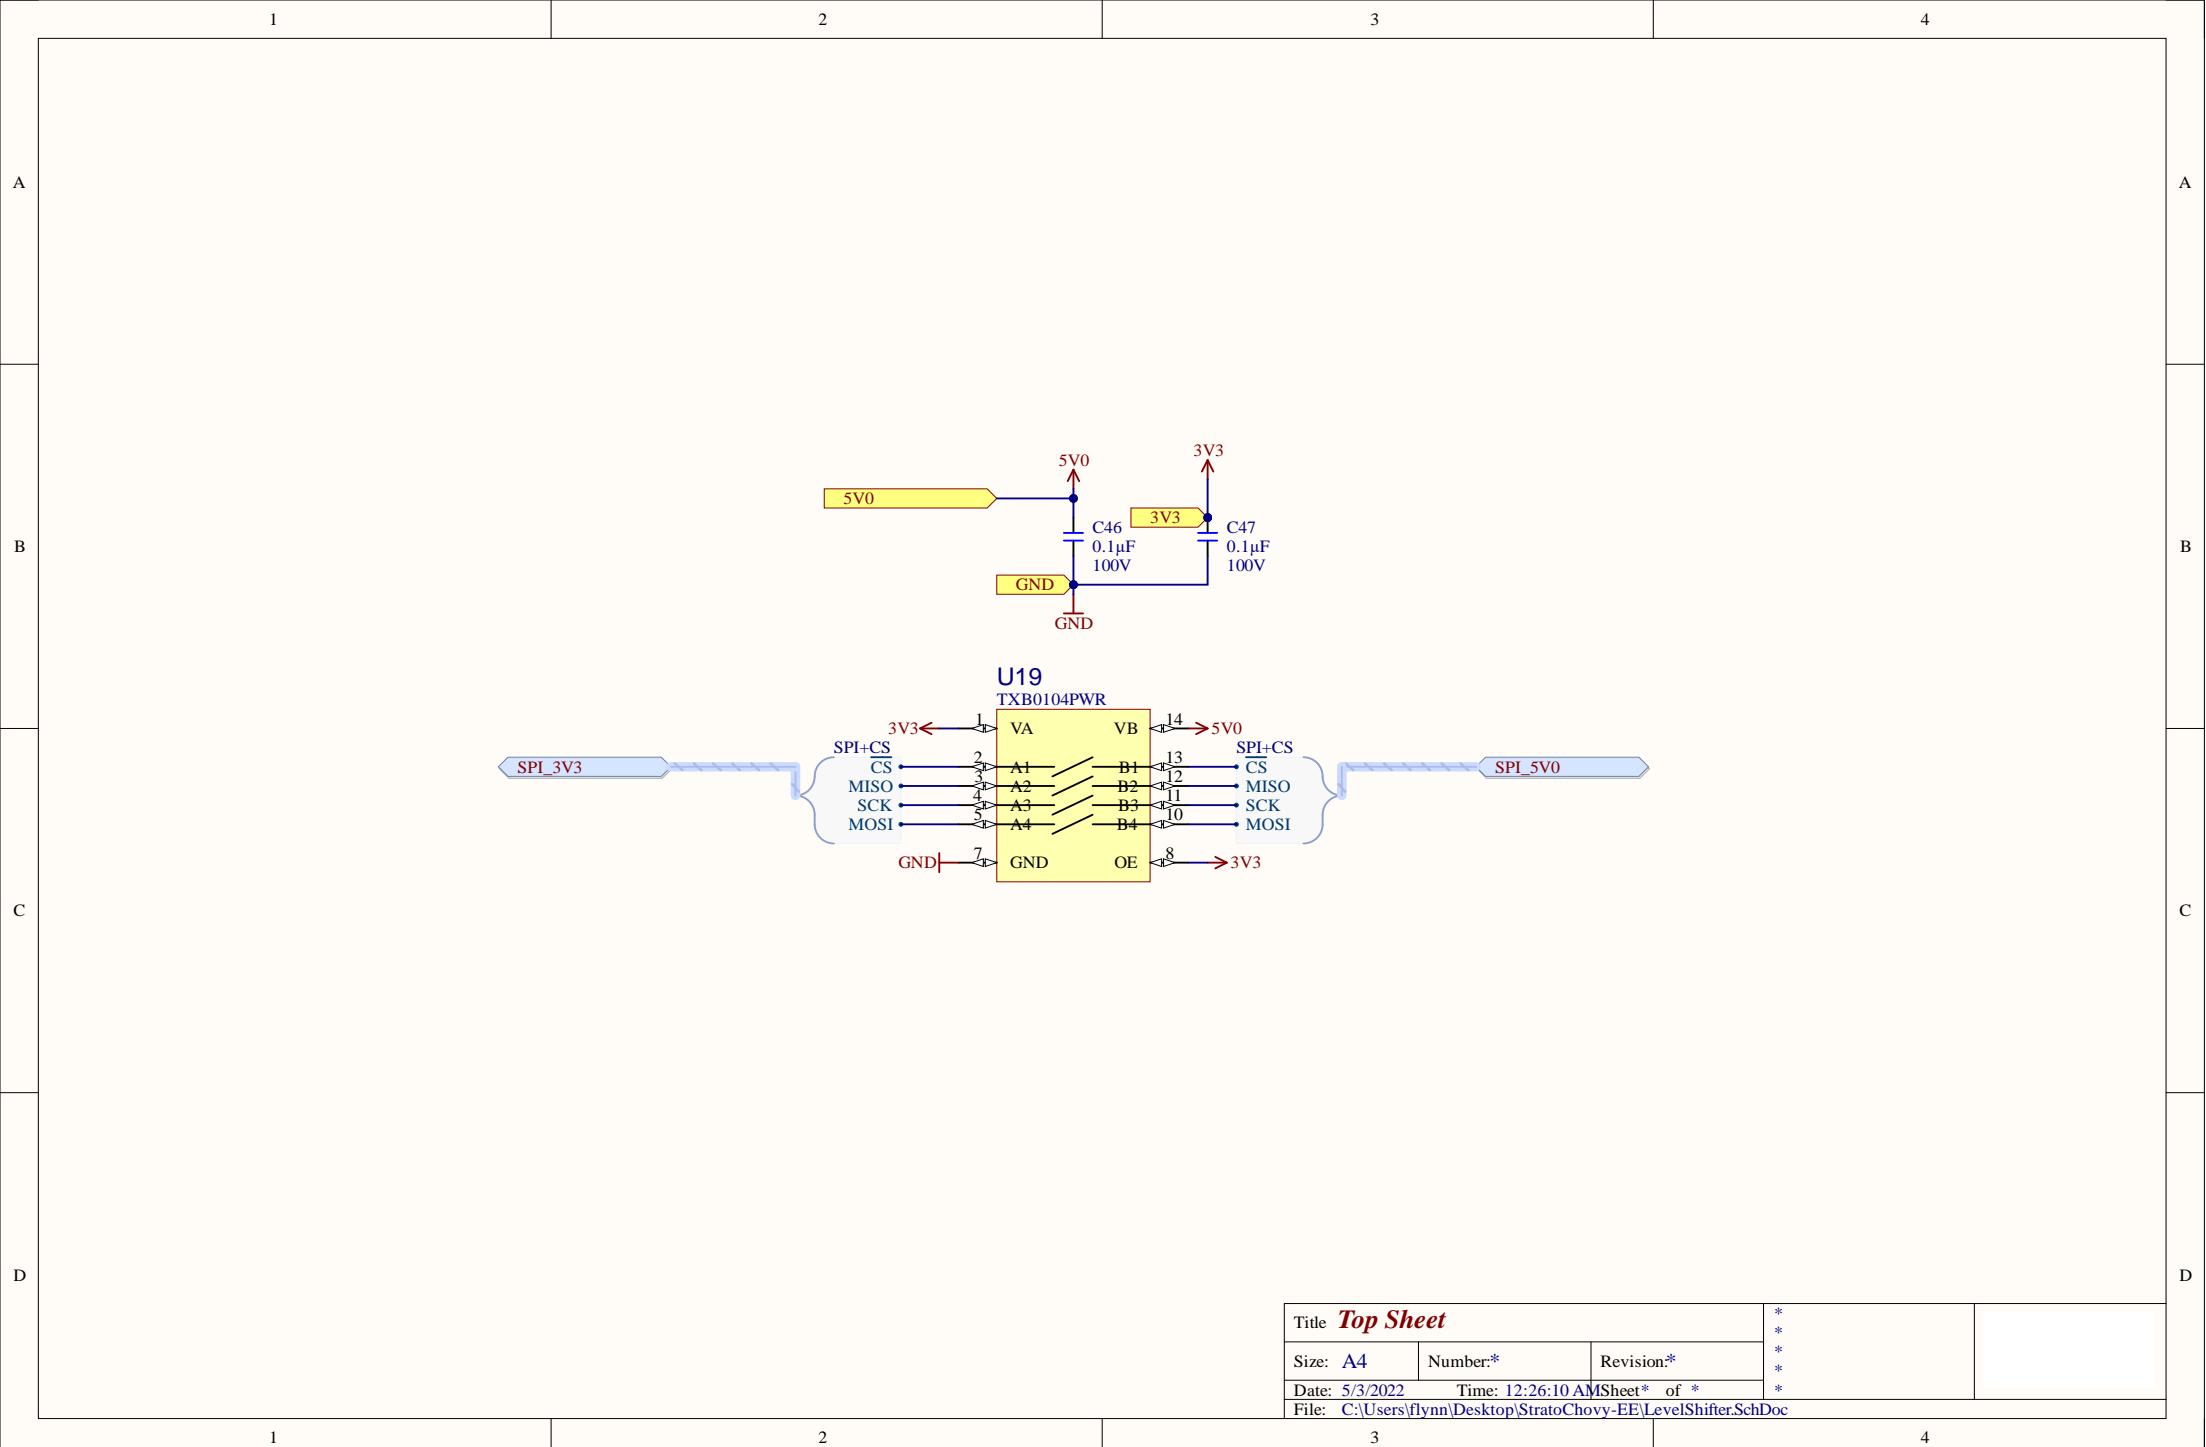

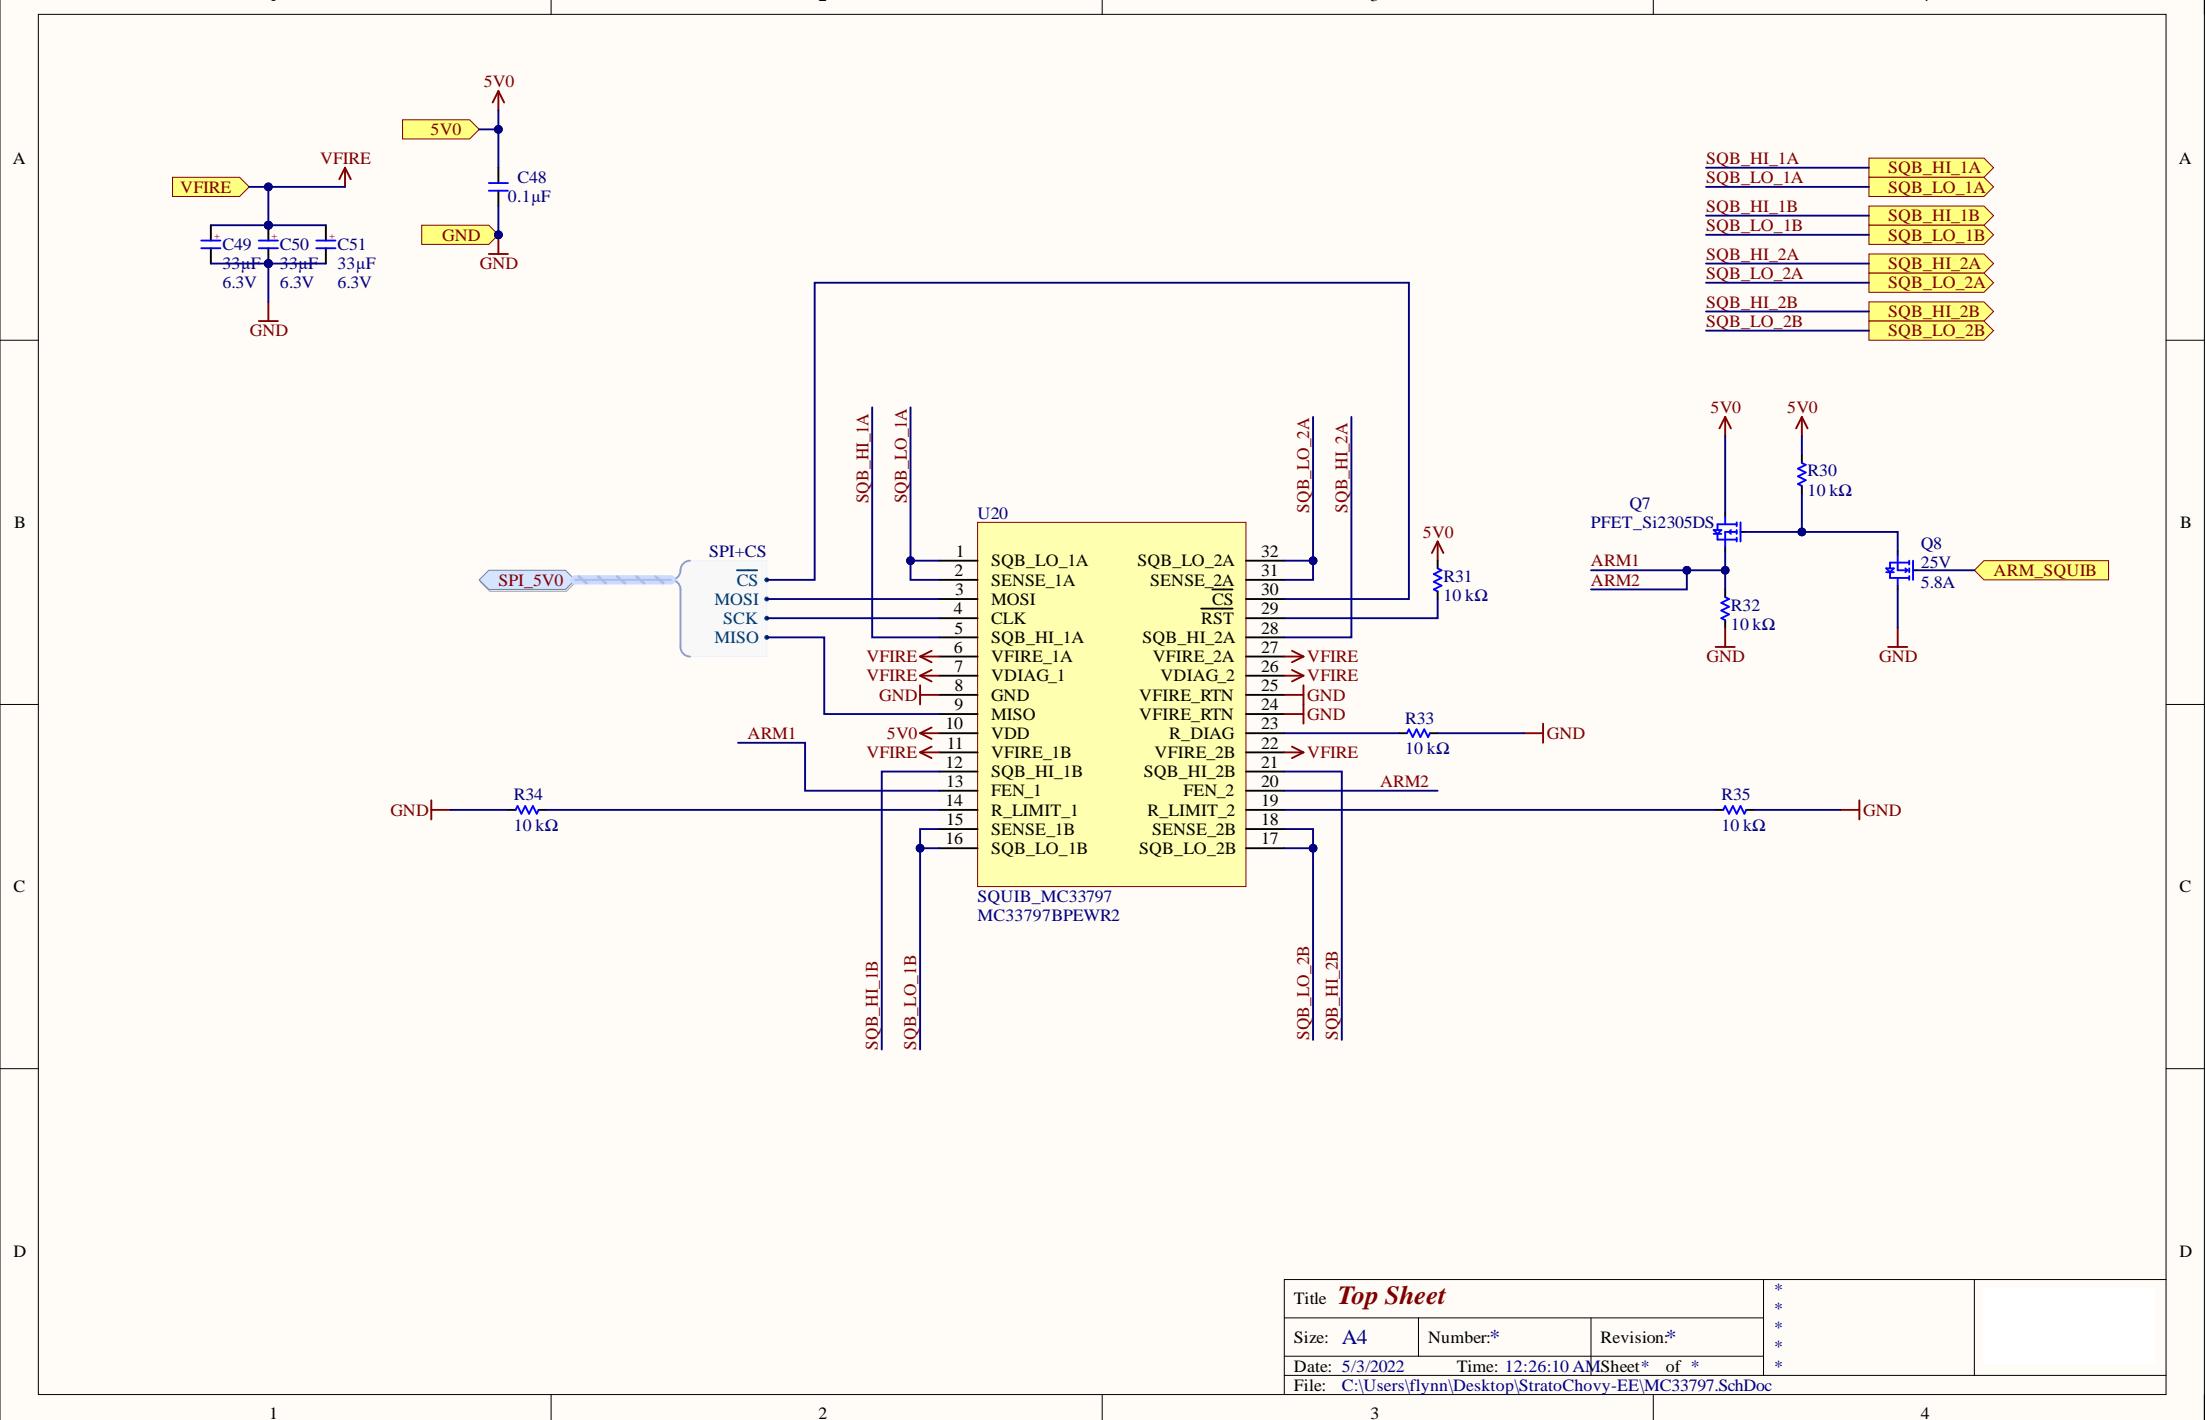

A

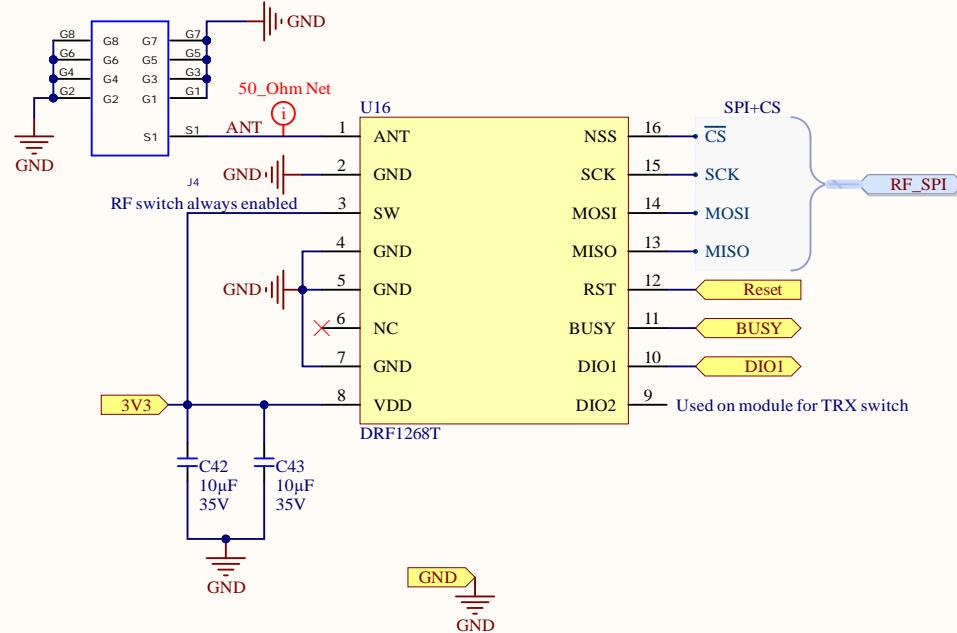

(G)FSK/4(G)FSK/LoRa Modulation
433Mhz transceiver
Max.22dBm output power
-147dBm sensitivity
Standard SPI interface
Low RX current: 5.7 mA
Automatic RF sense and CAD monitor
Data Rate: <300 kbps
Standby current: <1uA
Supply voltage: 3.3V








A

B

C

D

Title		
Size	Number	Revision
A		
Date: 5/03/2022	Sheet of	
File: C:\Users\...\Radio.SchDoc	Drawn By:	

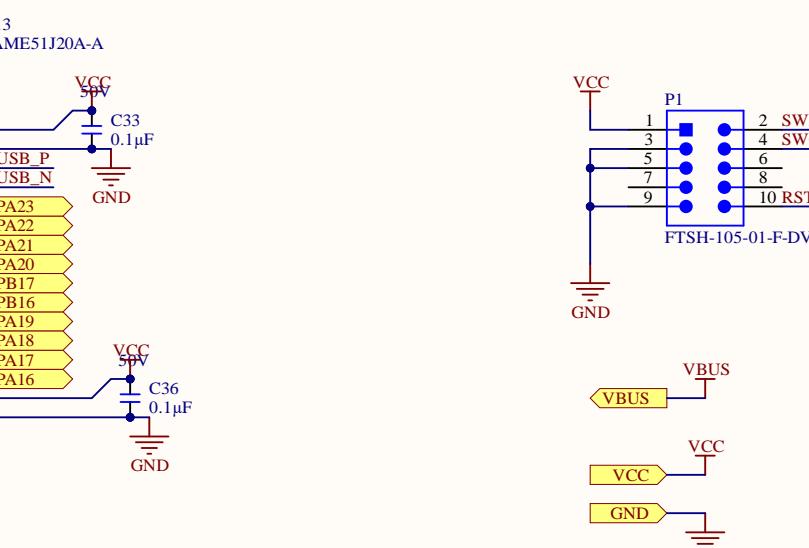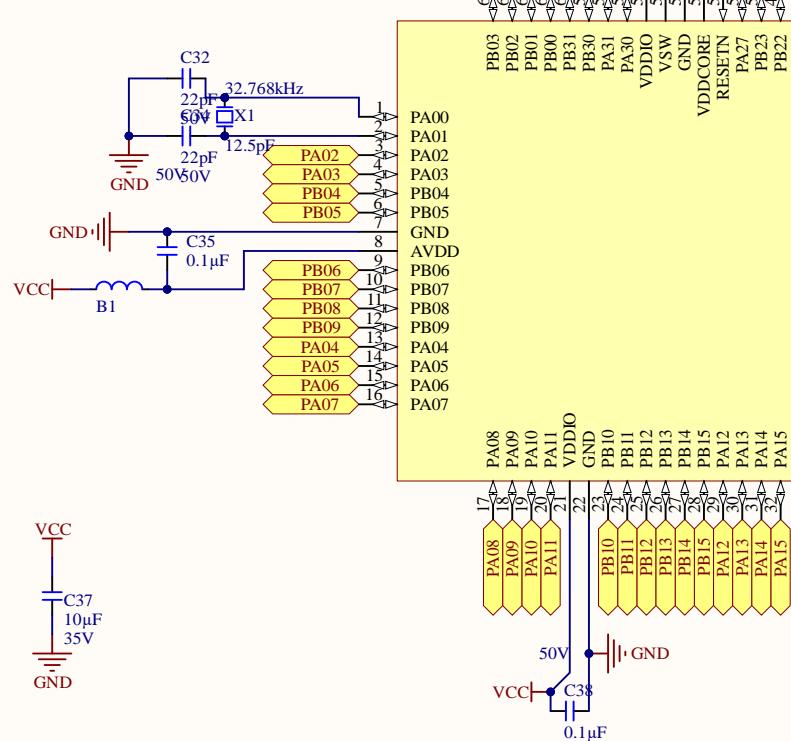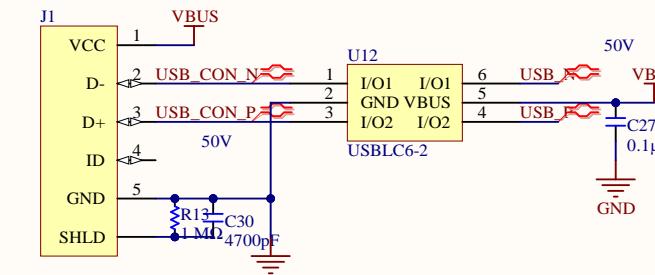

Title *		*	
Size: A4		Number:*	Revision:*
Date: 5/3/2022		Time: 12:26:11 AMSheet* of *	
File: C:\Users\flunn\Desktop\StratoChou\EE\SAMDS1.SchDoc			

