


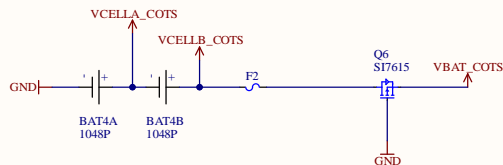
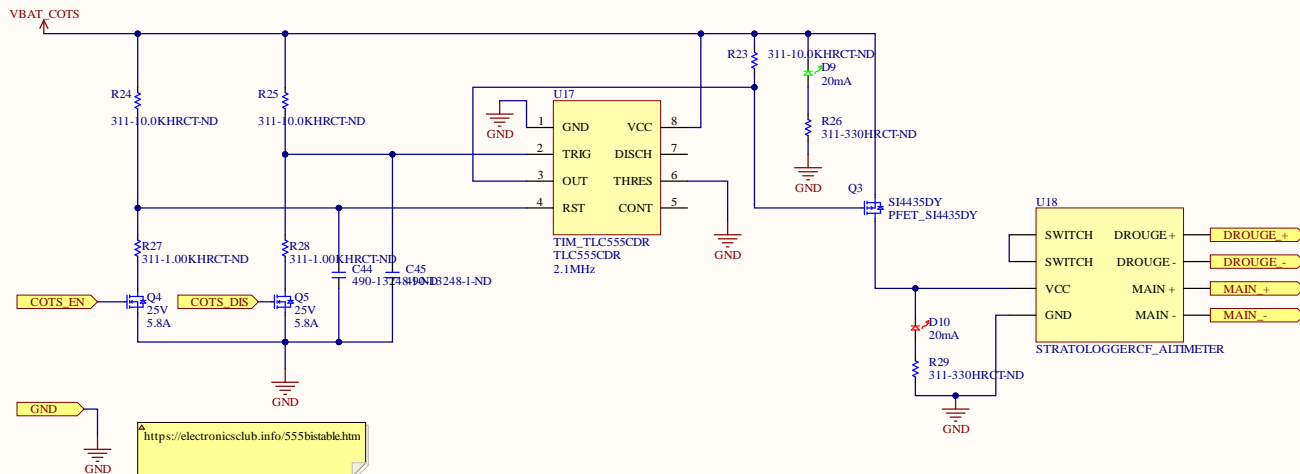
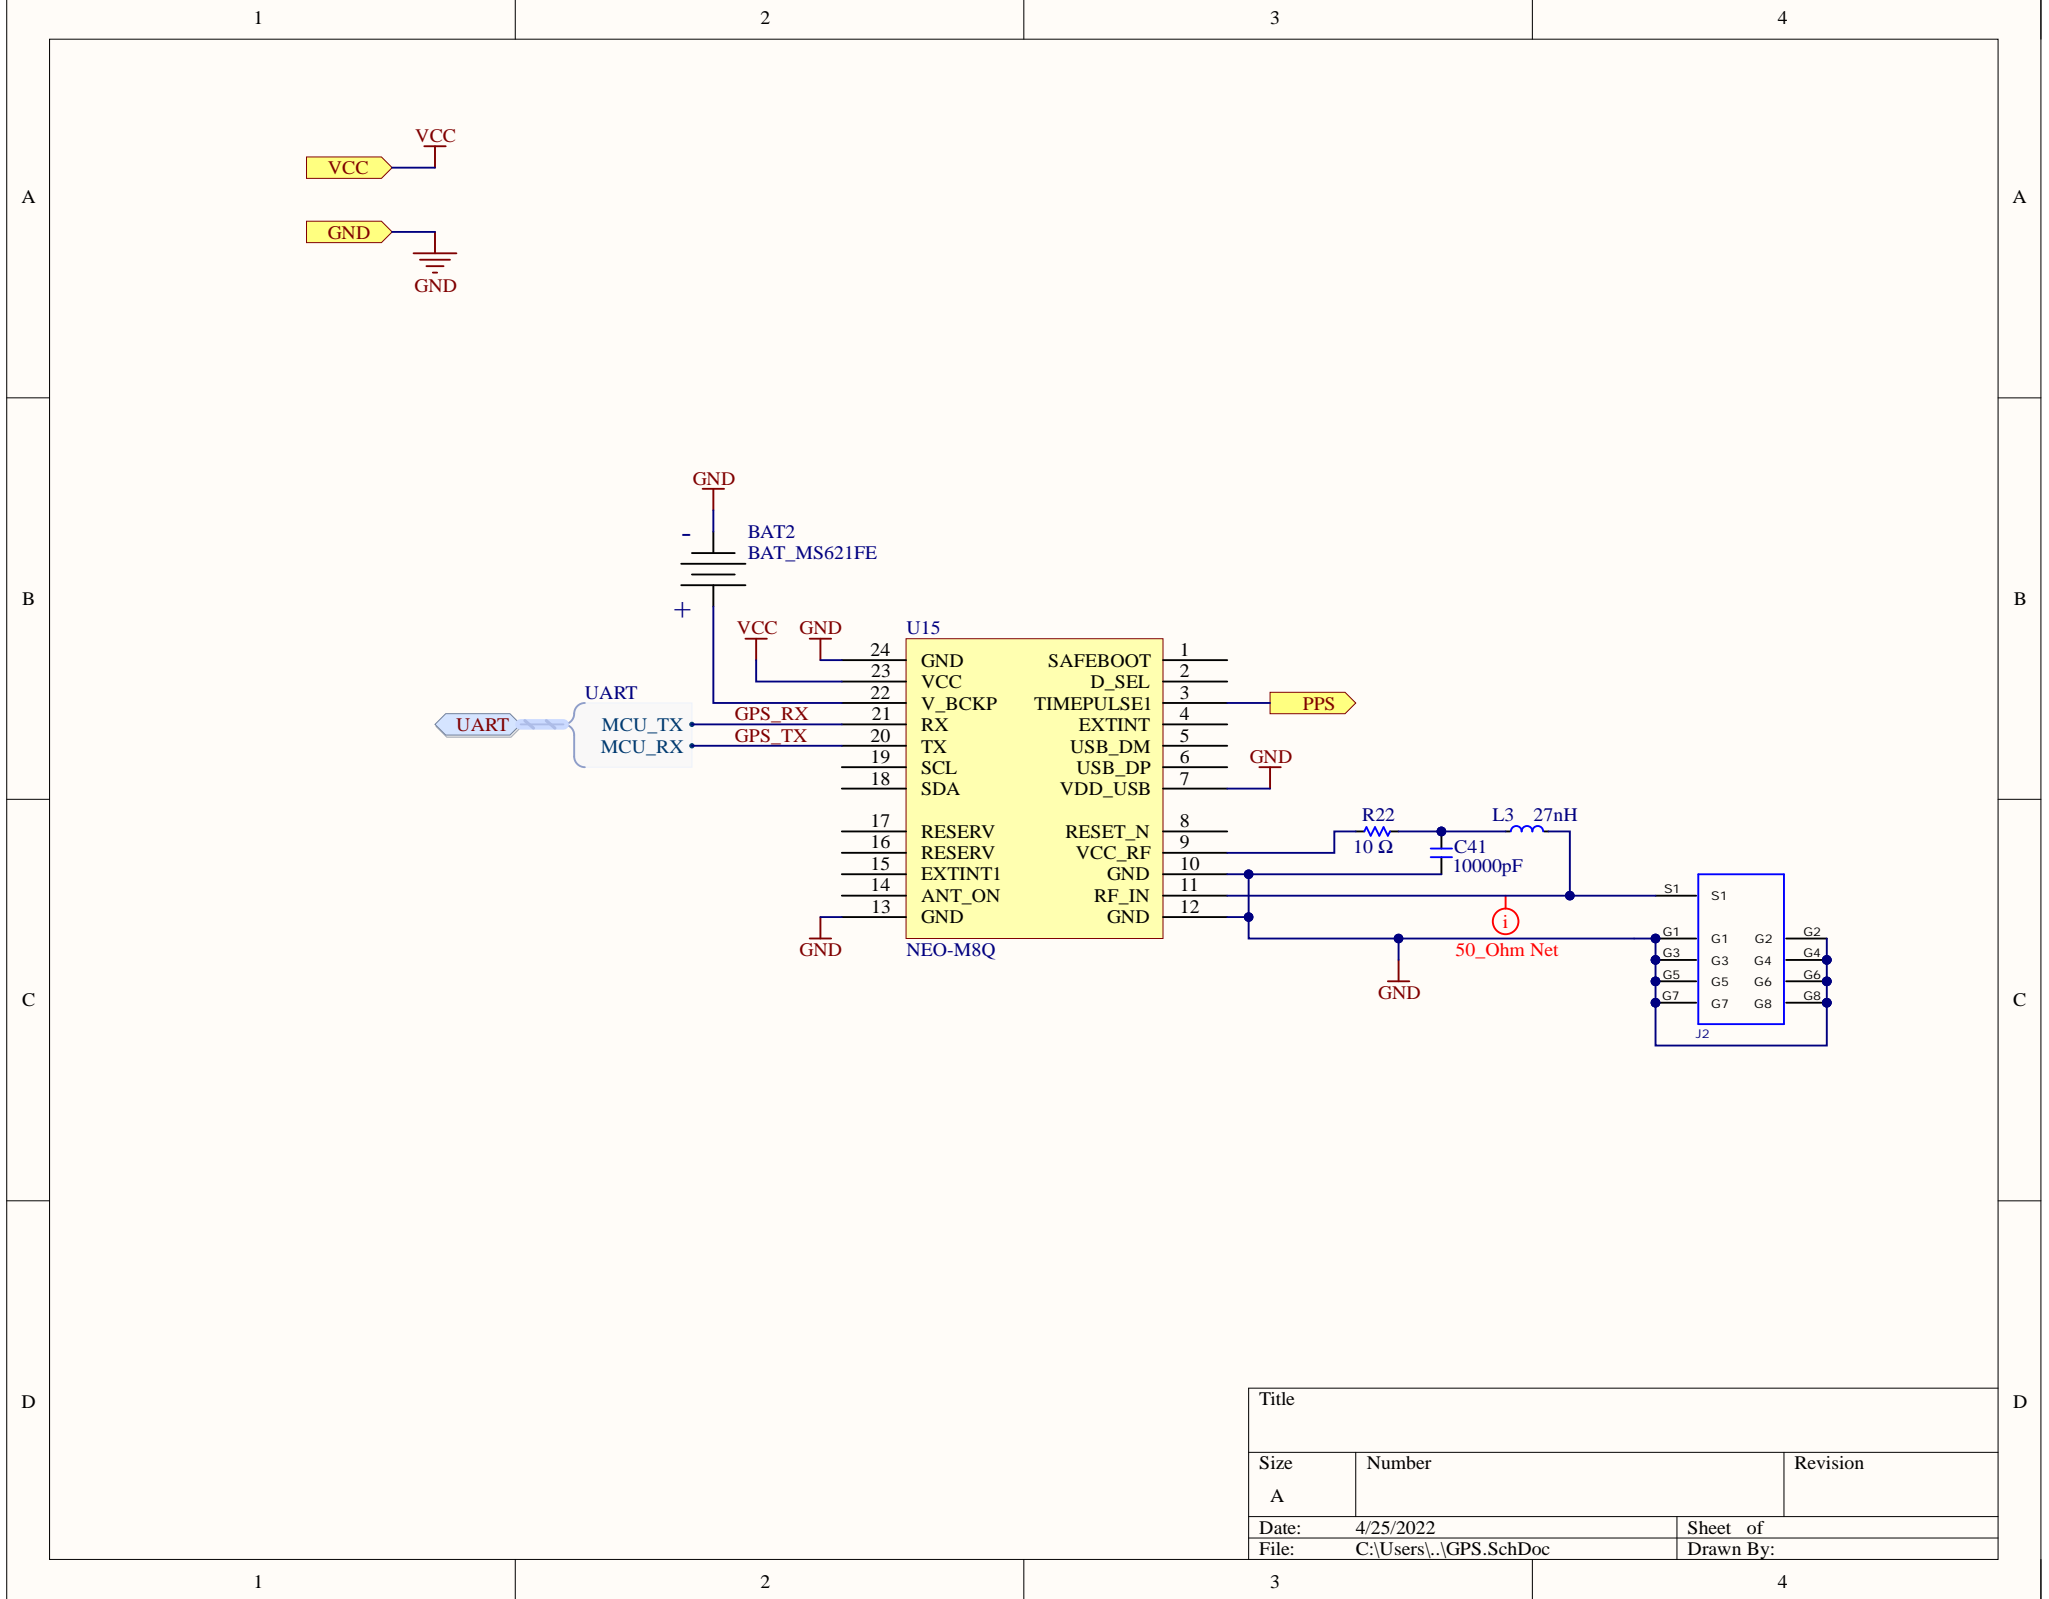



Title <i>External Indicators</i>			
Size: A4	Number:*	Revision:*	
Date: 4/25/2022	Time: 8:06:49 PM	Sheet5 of 6	
File: C:\Users\flynn\Desktop\StratoChovy-EE\Blink_Blink_Beep_Boop.SchDoc			









Title		
Size	Number	Revision
A		
Date:	4/25/2022	Sheet of
File:	C:\Users\...\GPS.SchDoc	Drawn By:

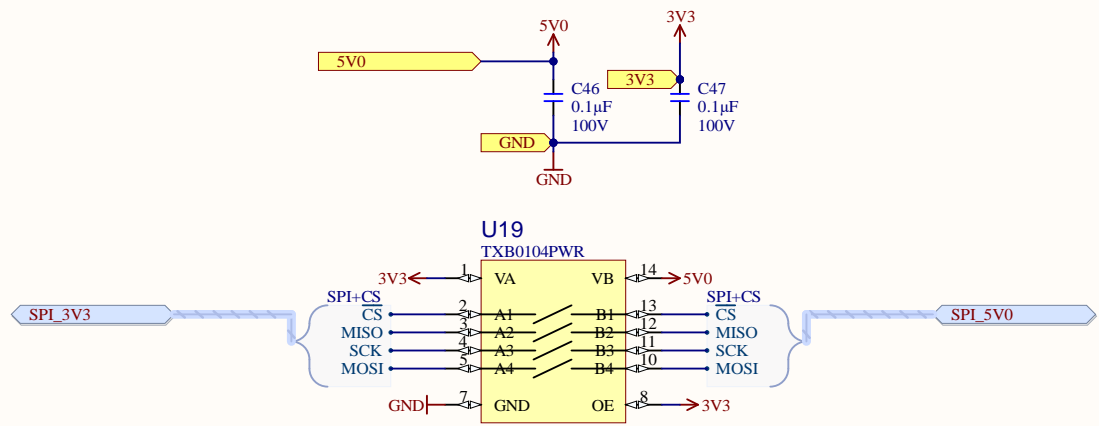


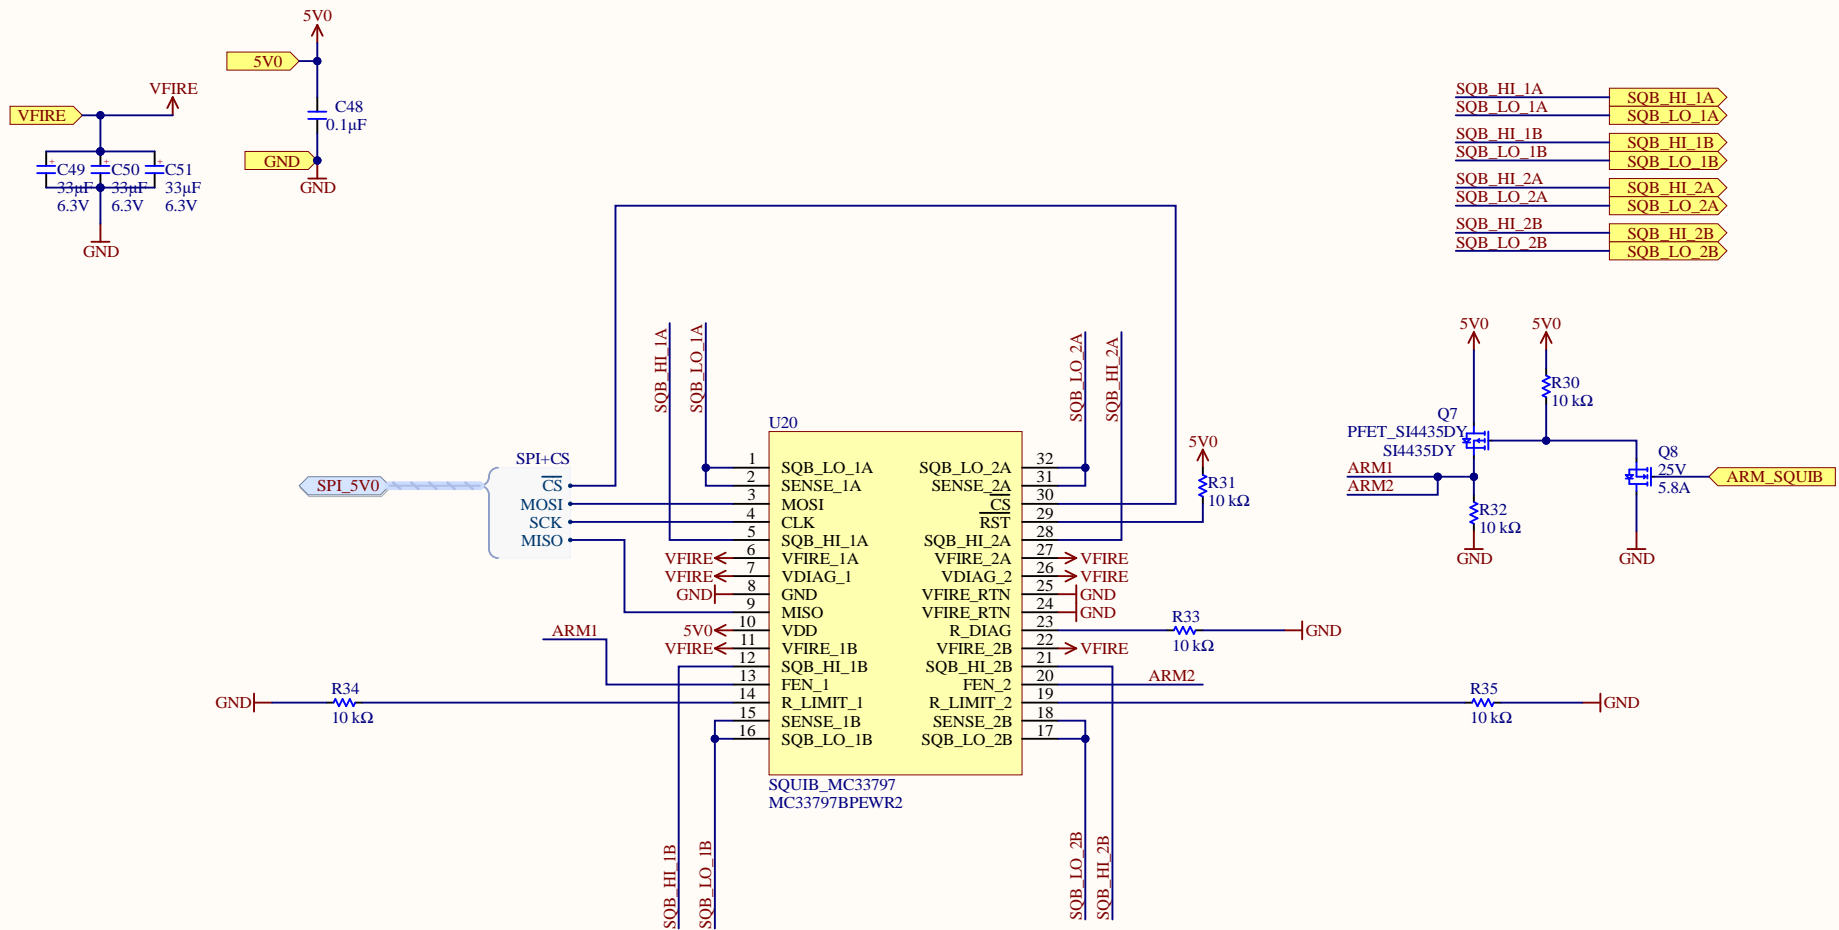


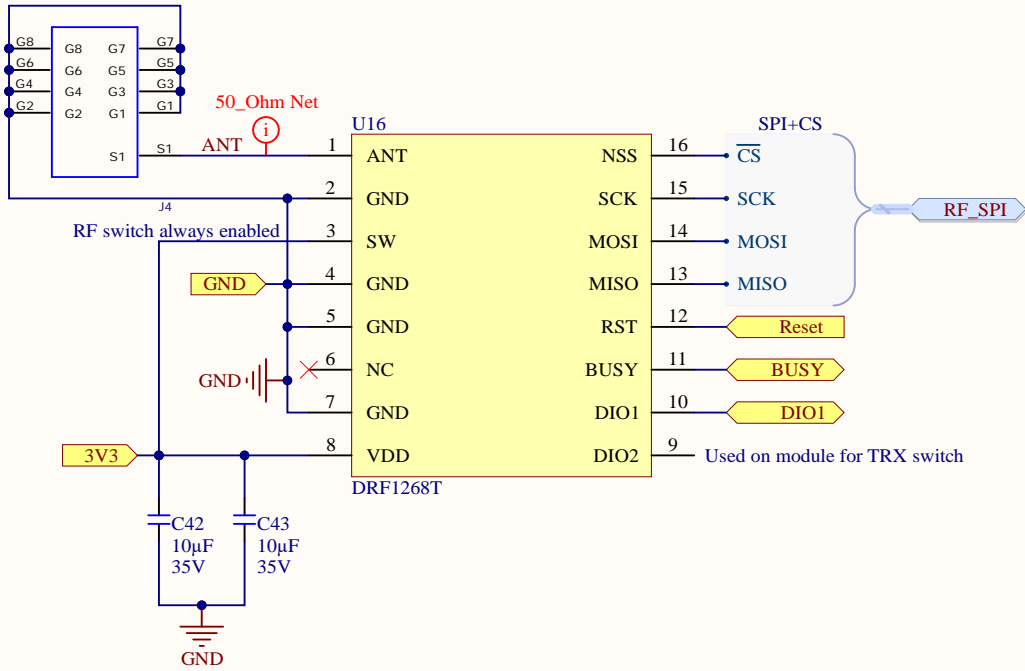


(G)FSK/4(G)FSK/LoRa Modulation
 433Mhz transceiver
 Max.22dBm output power
 -147dBm sensitivity
 Standard SPI interface
 Low RX current: 5.7 mA
 Automatic RF sense and CAD monitor
 Data Rate: <300 kbps
 Standby current: <1uA
 Supply voltage: 3.3V

Title		
Size A	Number	Revision
Date:	4/25/2022	Sheet of
File:	C:\Users\...\Radio.SchDoc	Drawn By:

[illegible]

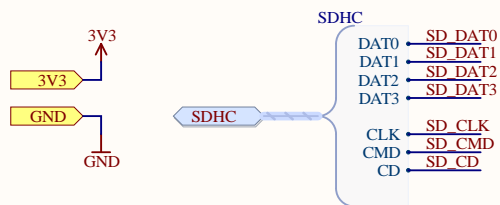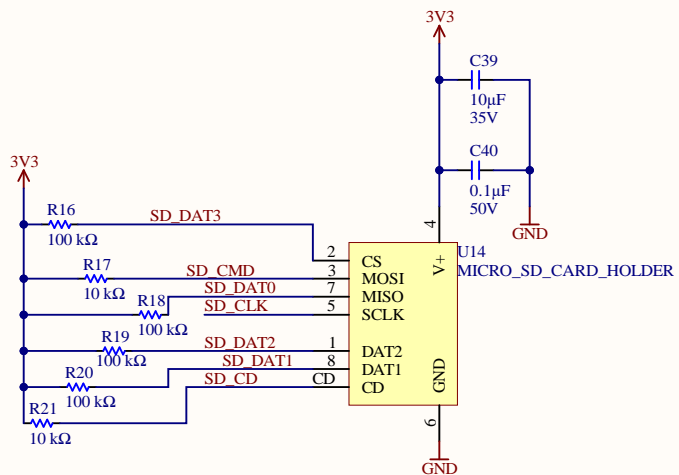

Title *			
Size: A4	Number:*	Revision:*	
Date: 4/25/2022	Time: 8:06:52 PM	Sheet* of *	
File: C:\Users\flynn\Desktop\StratoChovy-EE\SD.SchDoc			

