


DM42n, time per call

One bar per run, oldest on the left, marked with the time it was taken. Logarithmic. A bar at the bottom of the scale is at or below 0.01 ms, the tick resolution rather than a measurement. Case 01 is the empty control and is subtracted from the rest.
1 bar left out: that case number named a different case in an older run

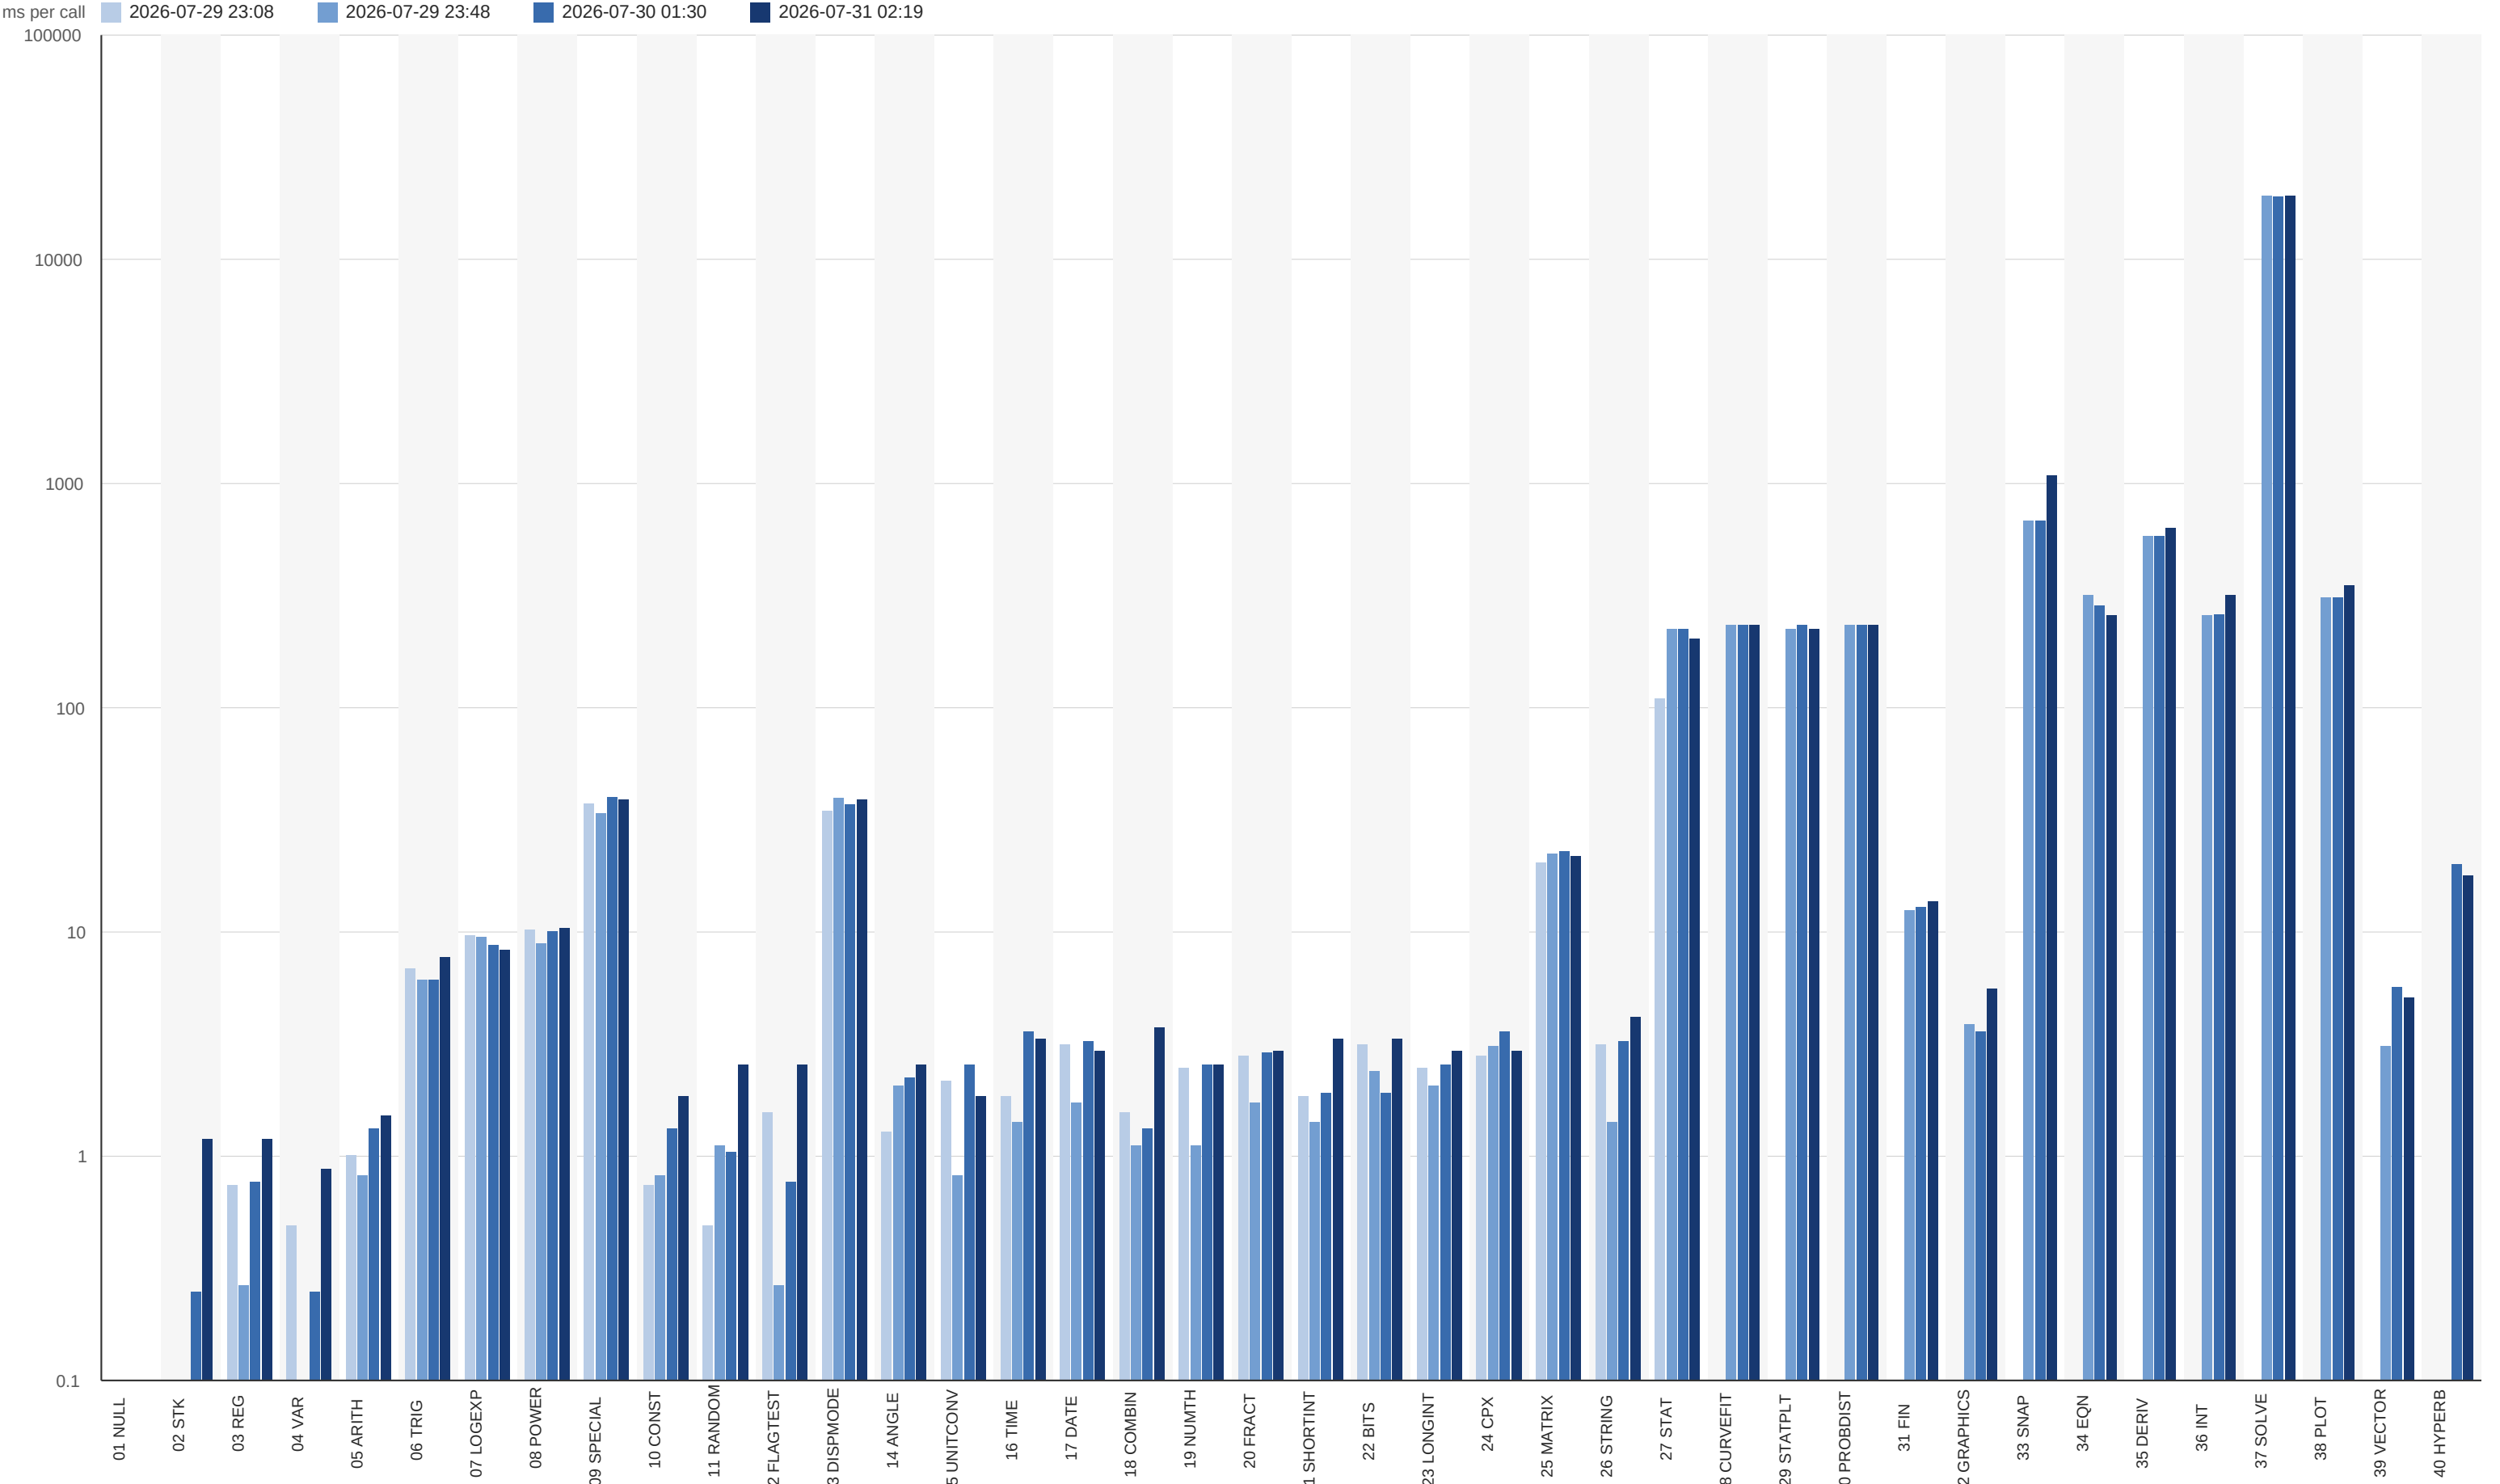

DM42n, working memory used

One bar per run, oldest on the left, marked with the time it was taken. Bytes below the reference point, from one call. Only a reading with STCKST 0 is drawn, so a missing bar is a case that run could not resolve.


1 bar left out: that case number named a different case in an older run

bytes

2026-07-29 23:08


2026-07-29 23:48

2026-07-30 01:30

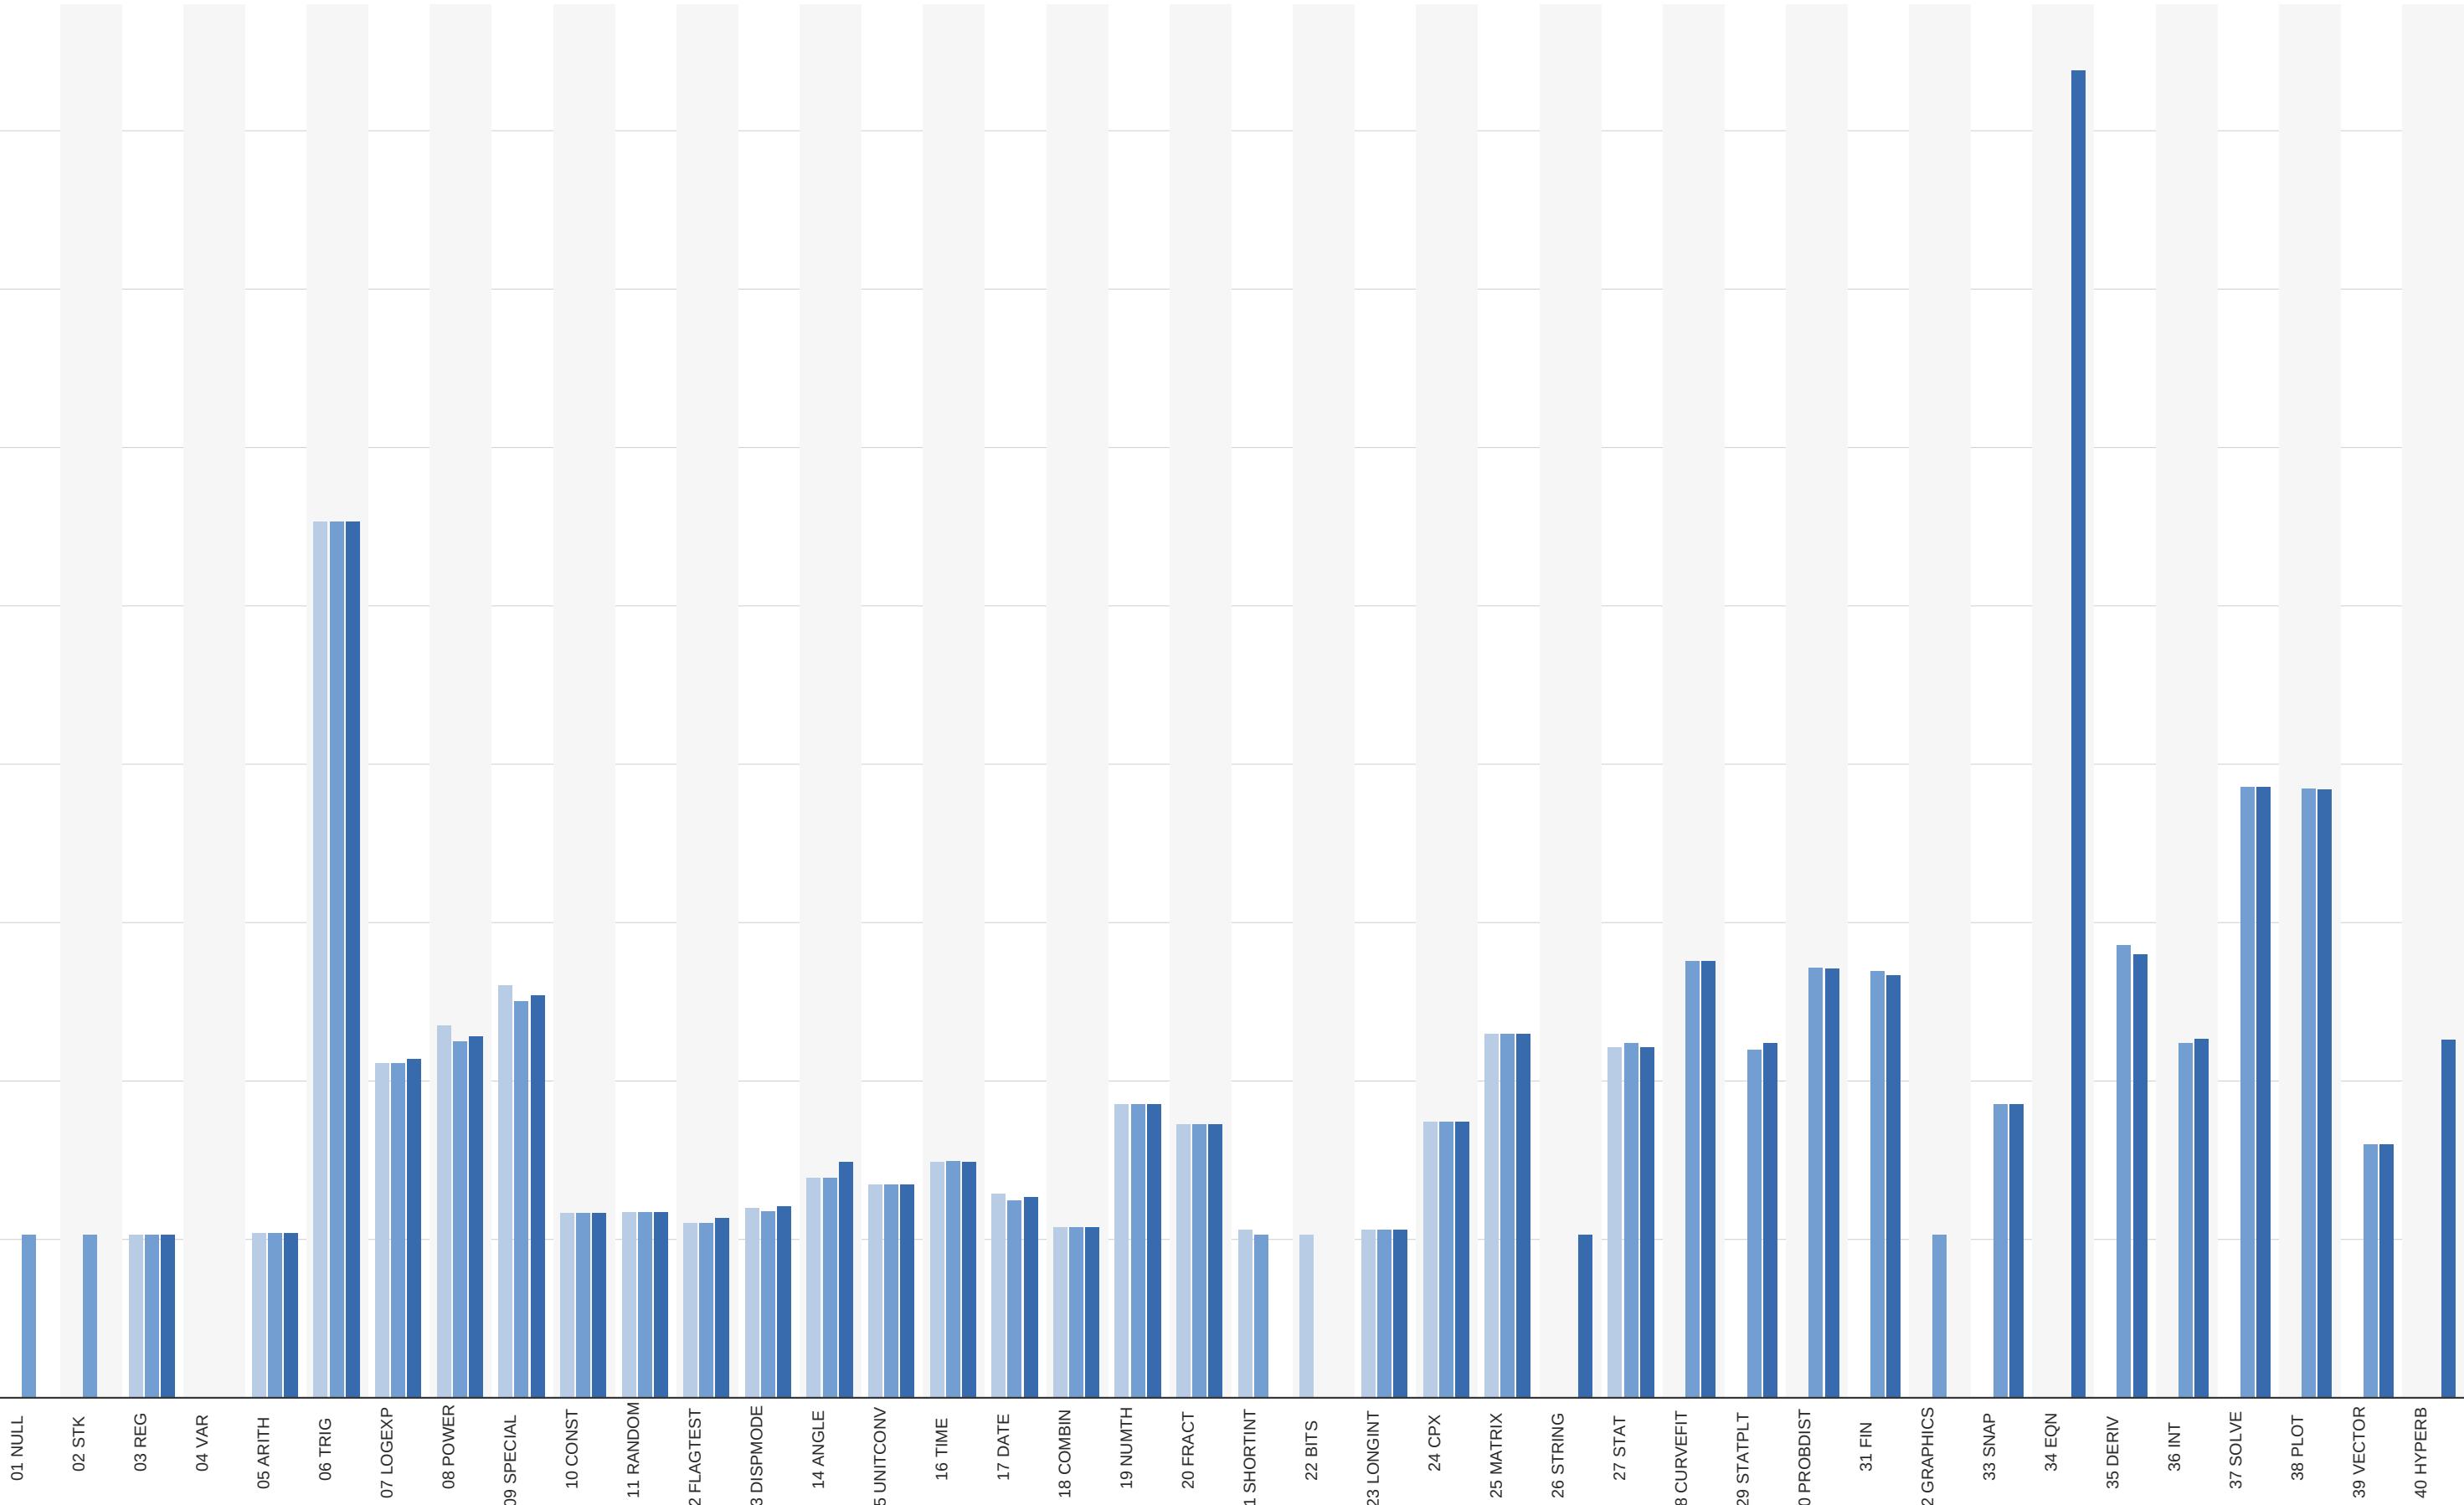


DM42, time per call

One bar per run, oldest on the left, marked with the time it was taken. Logarithmic. A bar at the bottom of the scale is at or below 0.01 ms, the tick resolution rather than a measurement. Case 01 is the empty control and is subtracted from the rest.

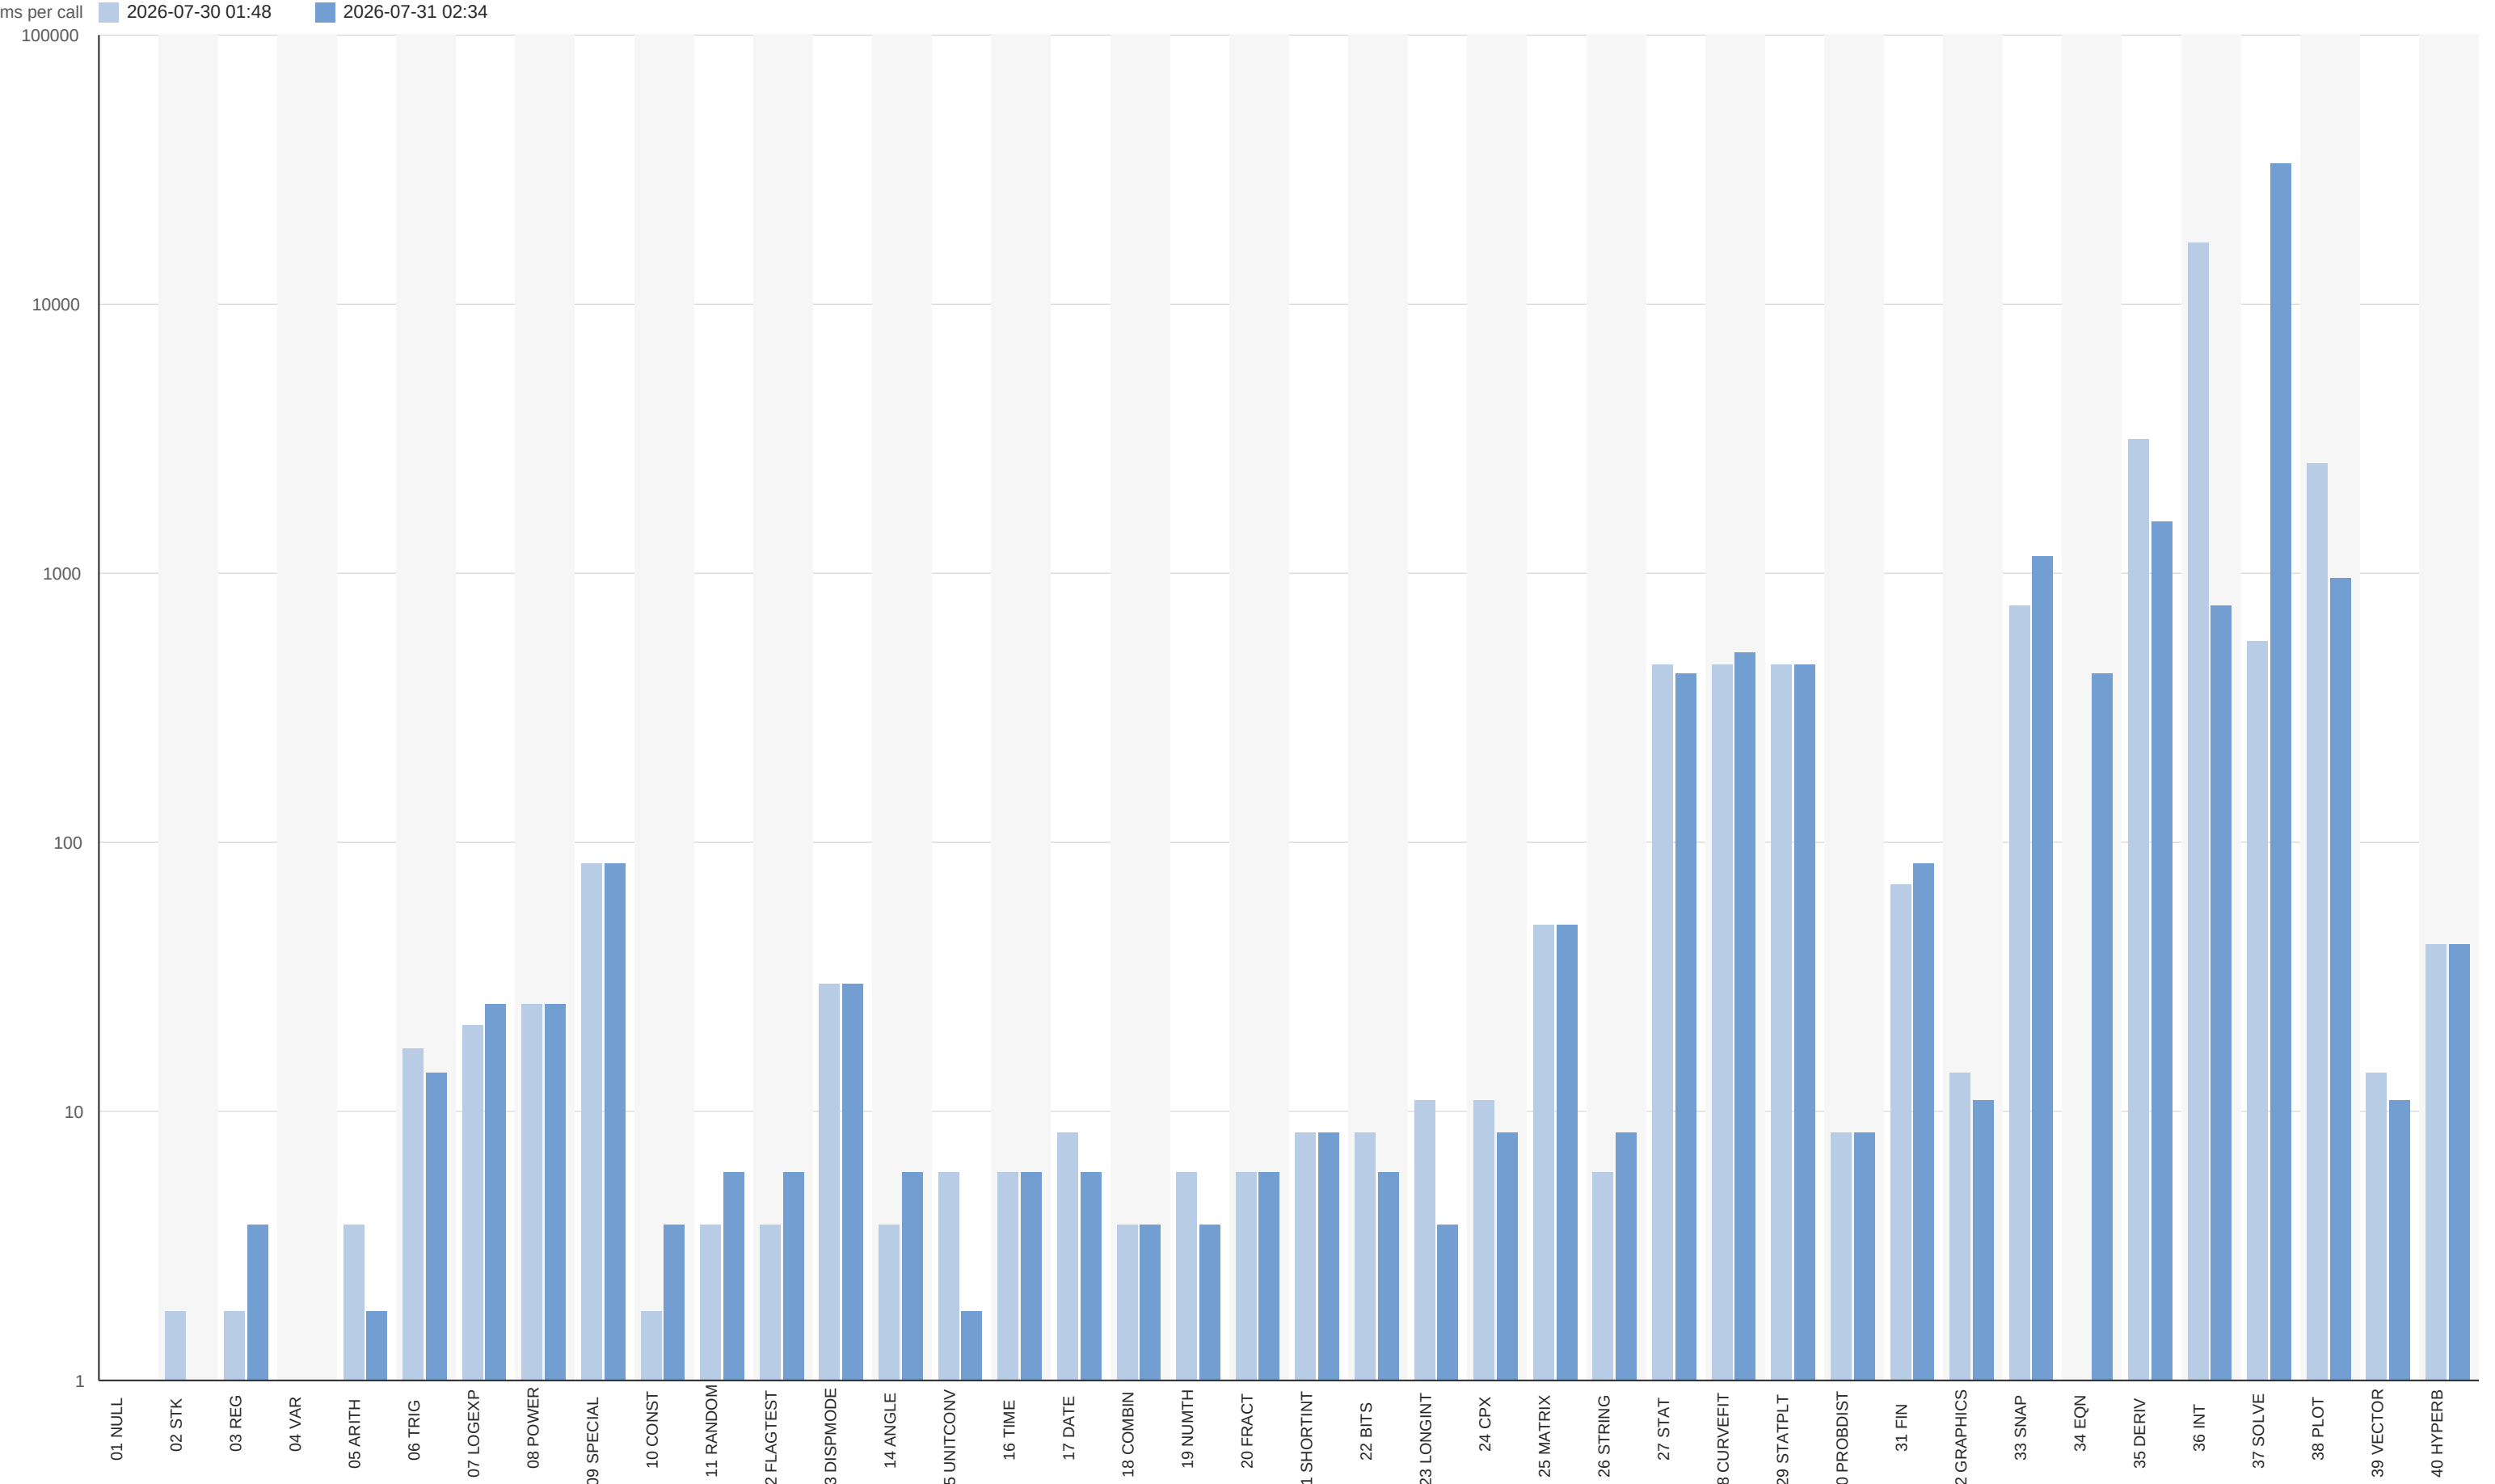

DM42, working memory used


One bar per run, oldest on the left, marked with the time it was taken. Bytes below the reference point, from one call. Only a reading with STCKST 0 is drawn, so a missing bar is a case that run could not resolve.

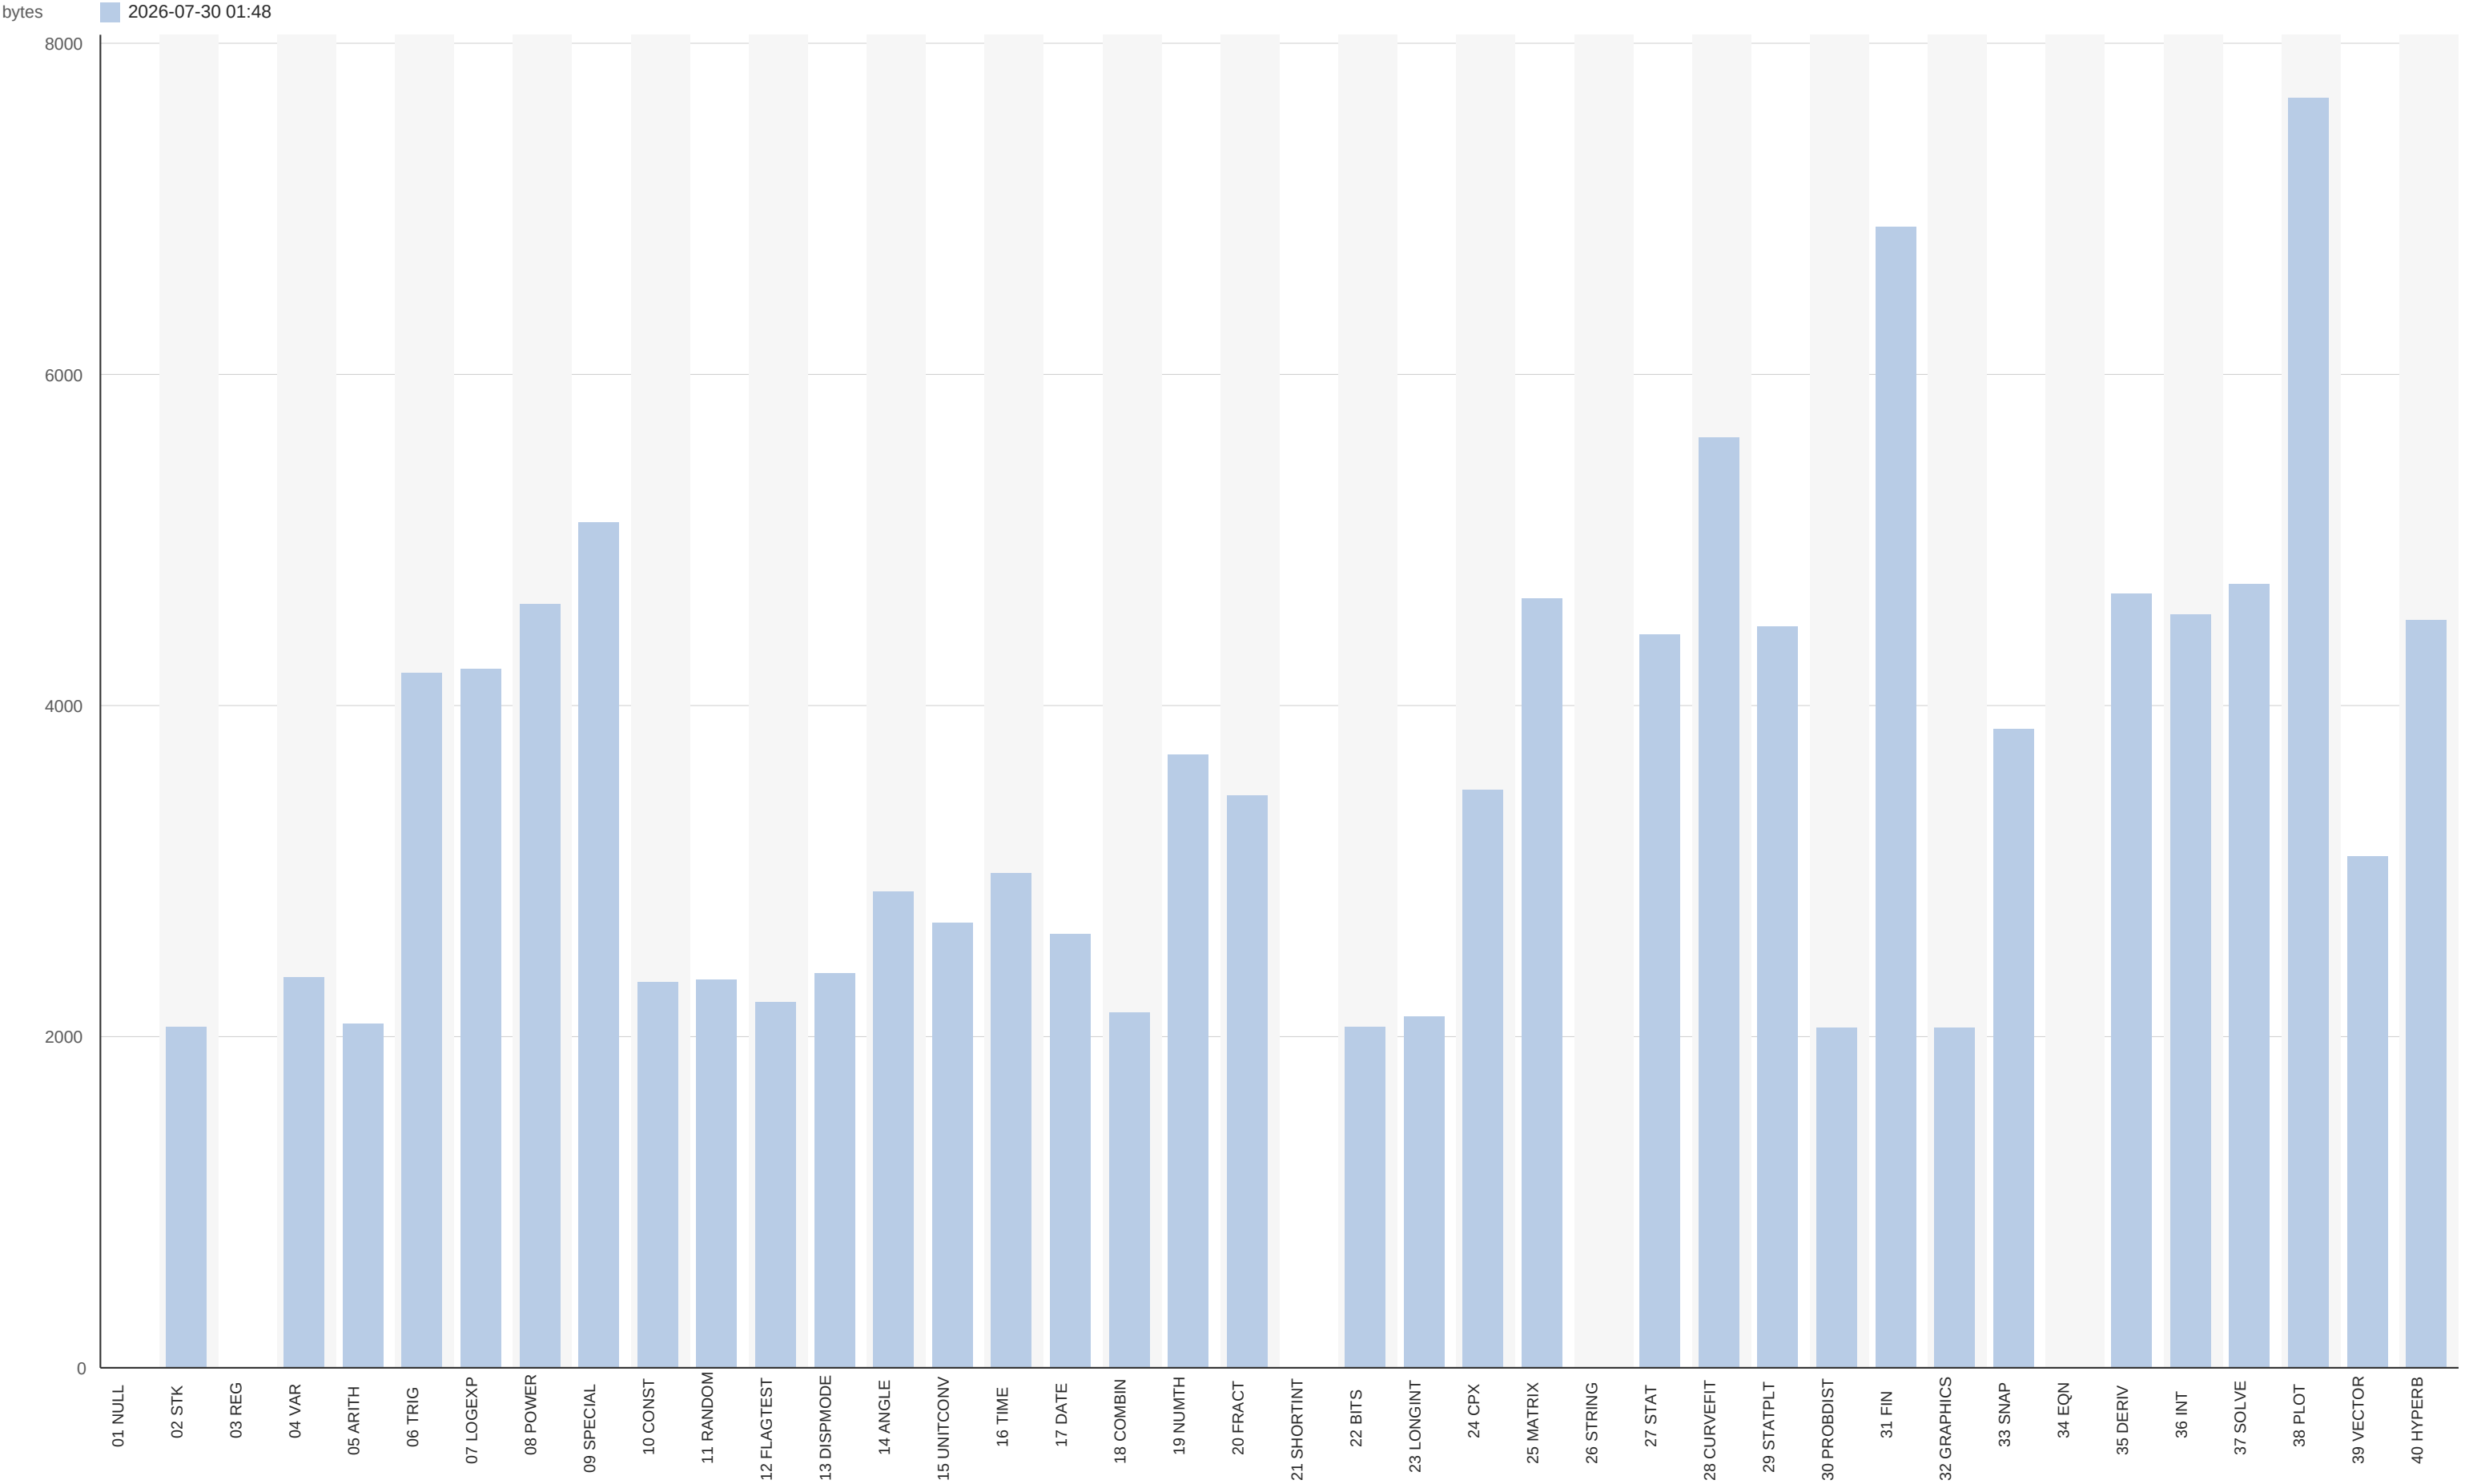

SIM, time per call

One bar per run, oldest on the left, marked with the time it was taken. Logarithmic. A bar at the bottom of the scale is at or below 0.01 ms, the tick resolution rather than a measurement. Case 01 is the empty control and is subtracted from the rest.

ms per call 2026-07-30 02:47

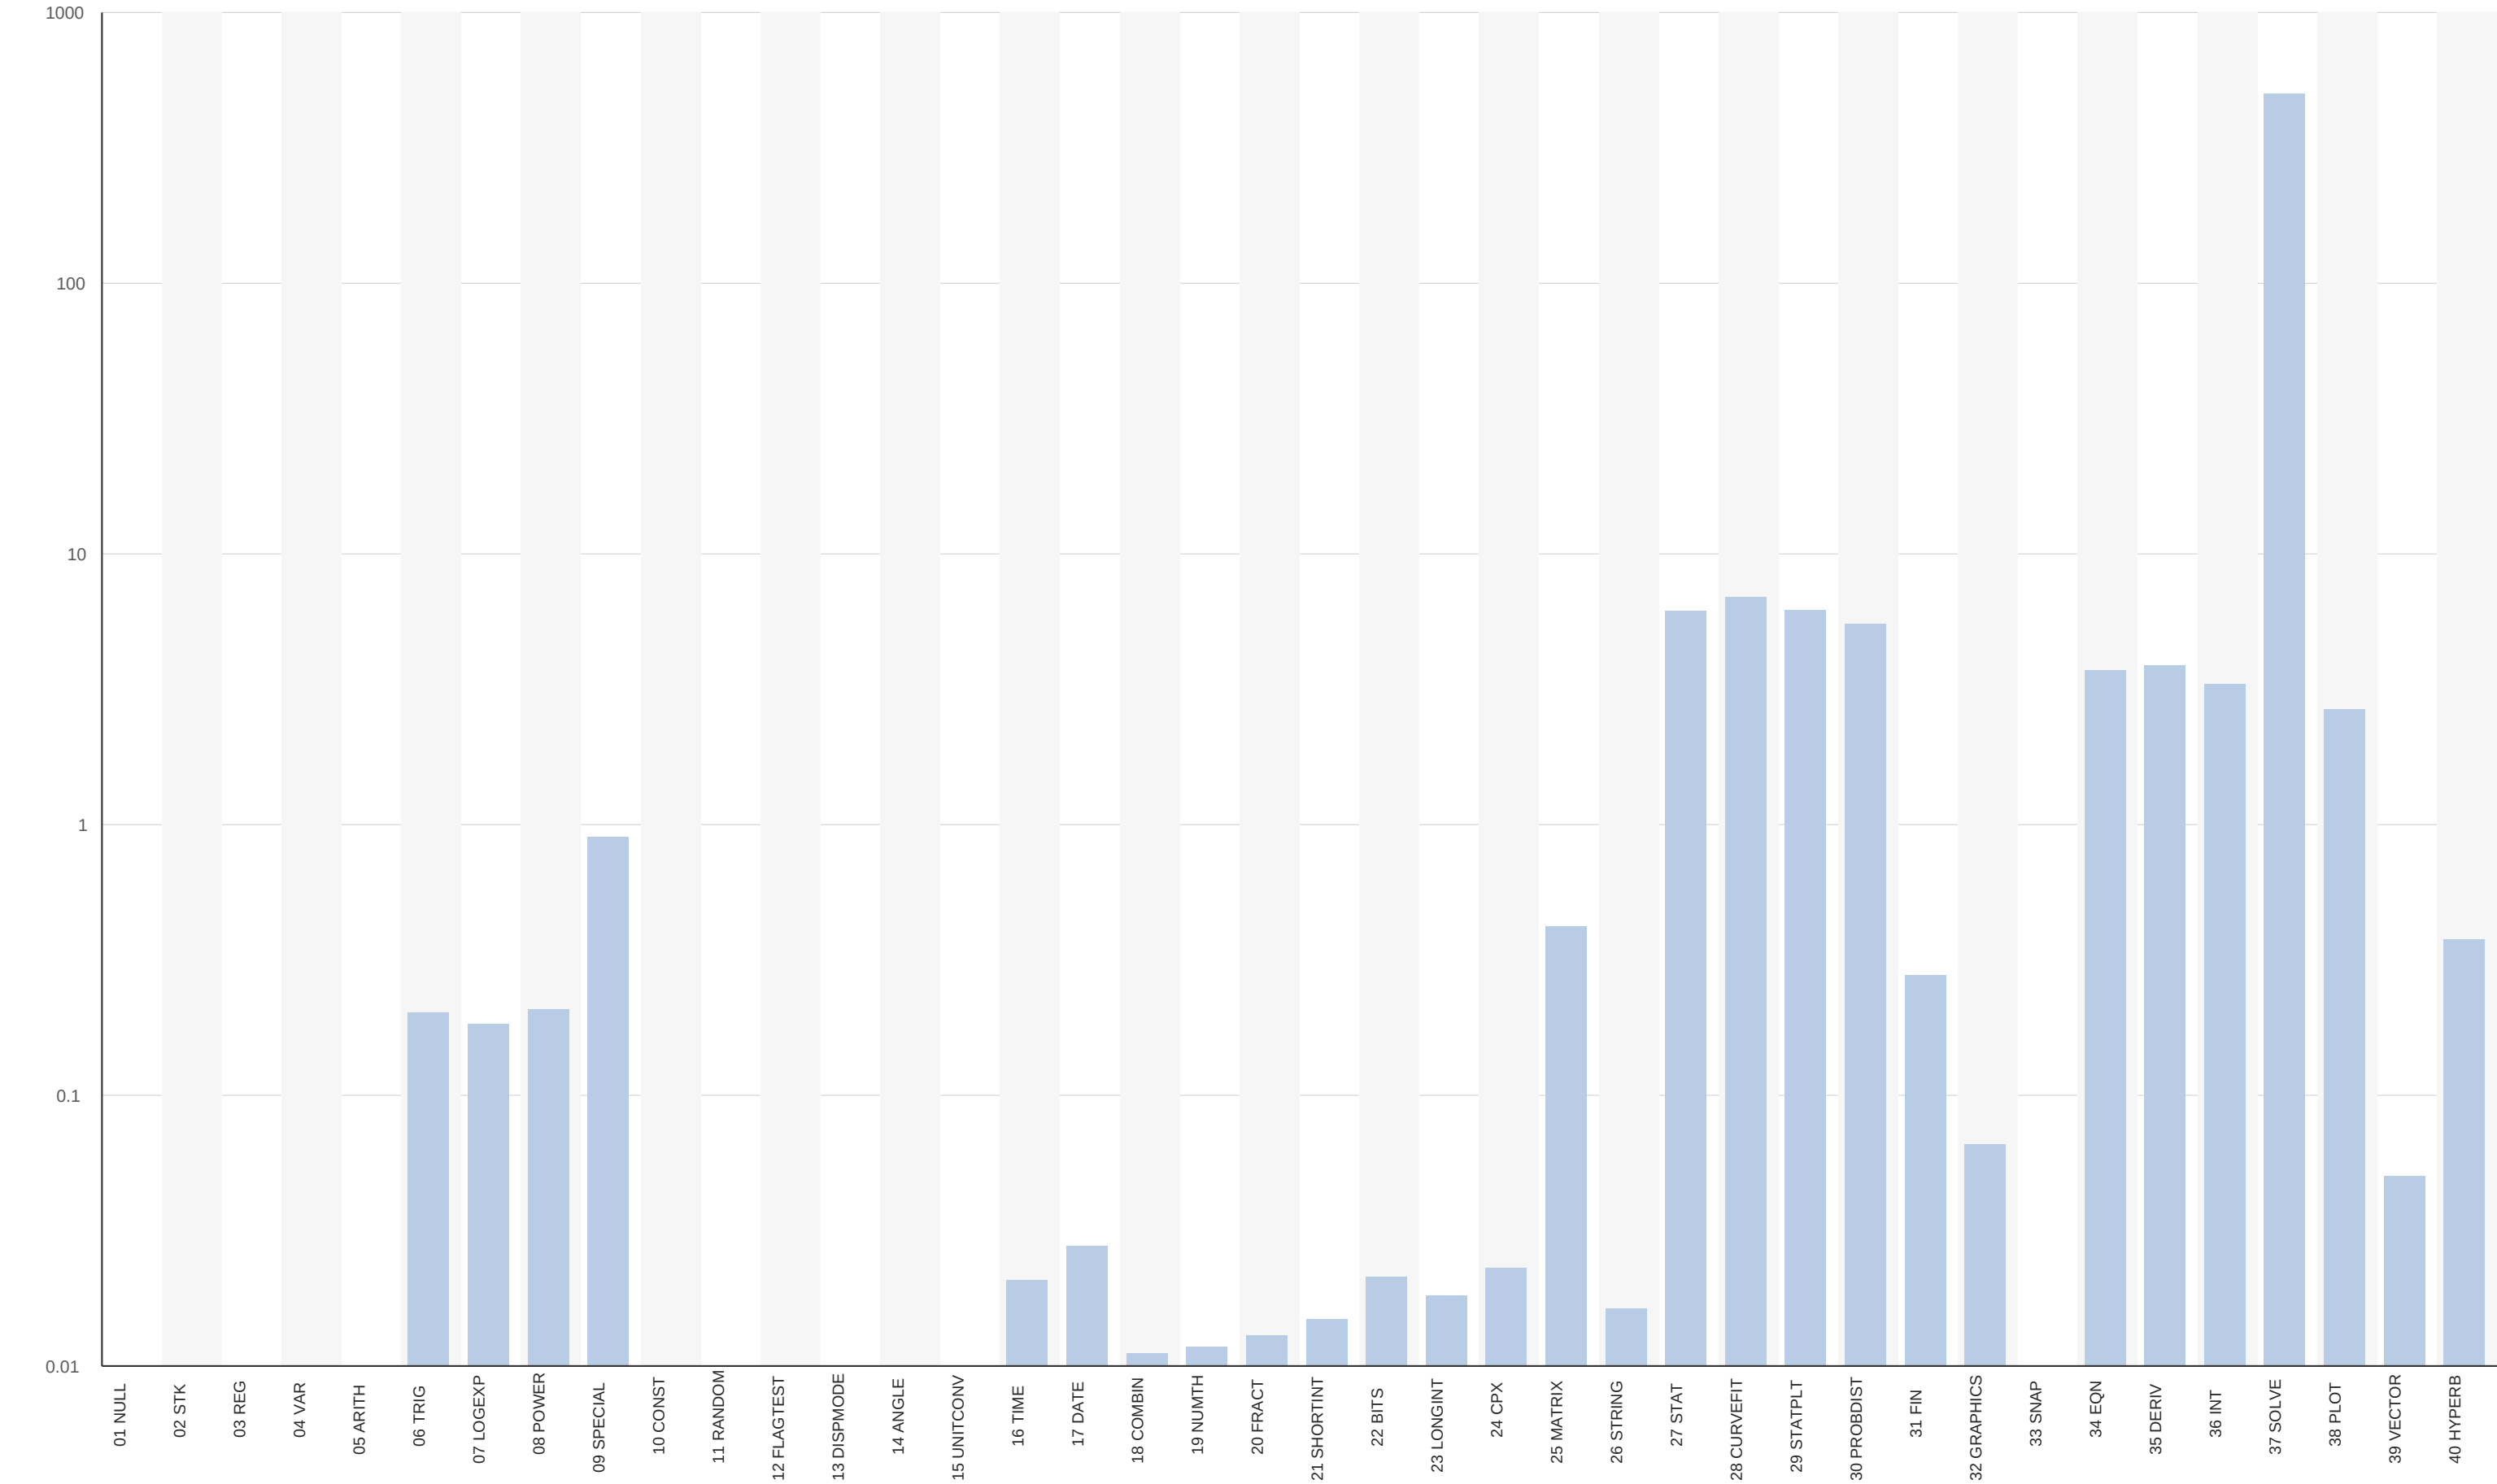

SIM, working memory used

One bar per run, oldest on the left, marked with the time it was taken. Bytes below the reference point, from one call. Only a reading with STCKST 0 is drawn, so a missing bar is a case that run could not resolve.

