

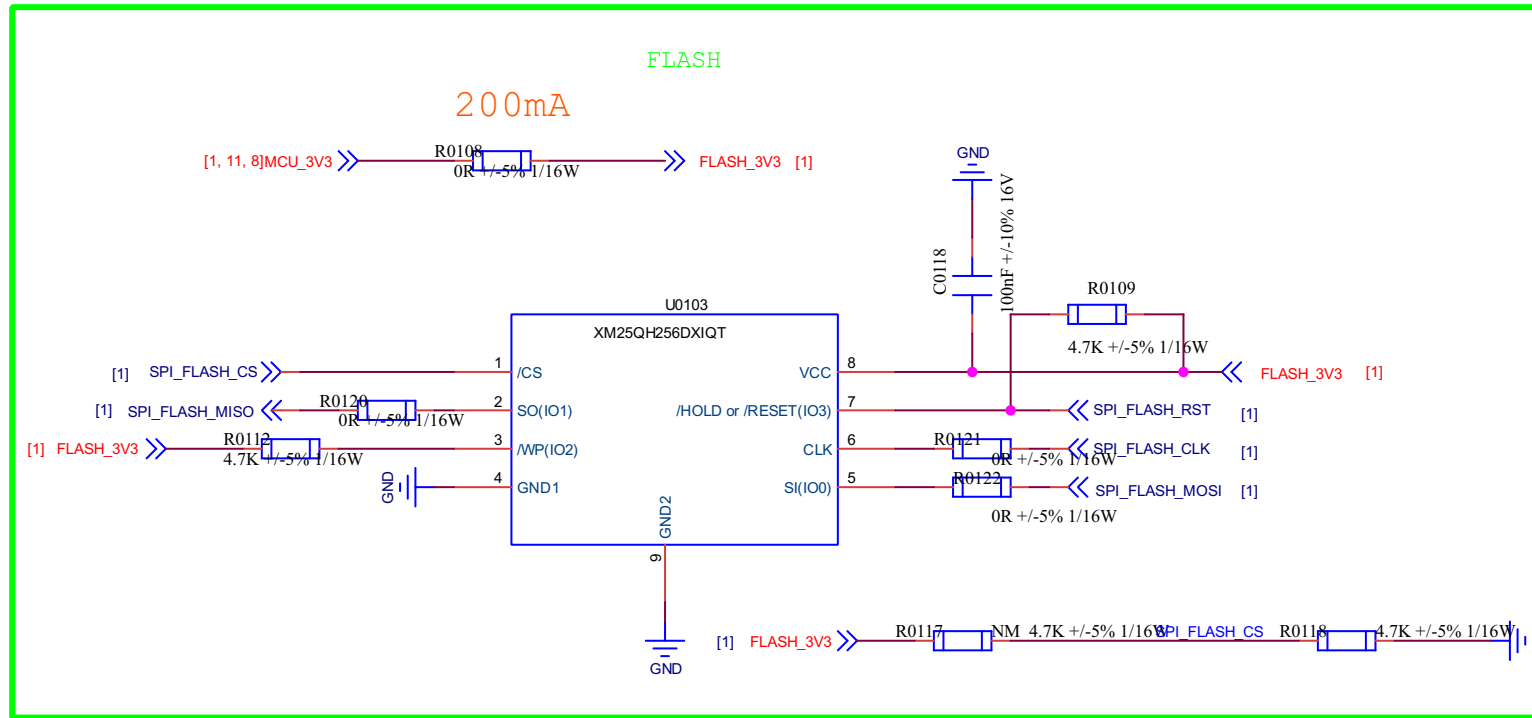
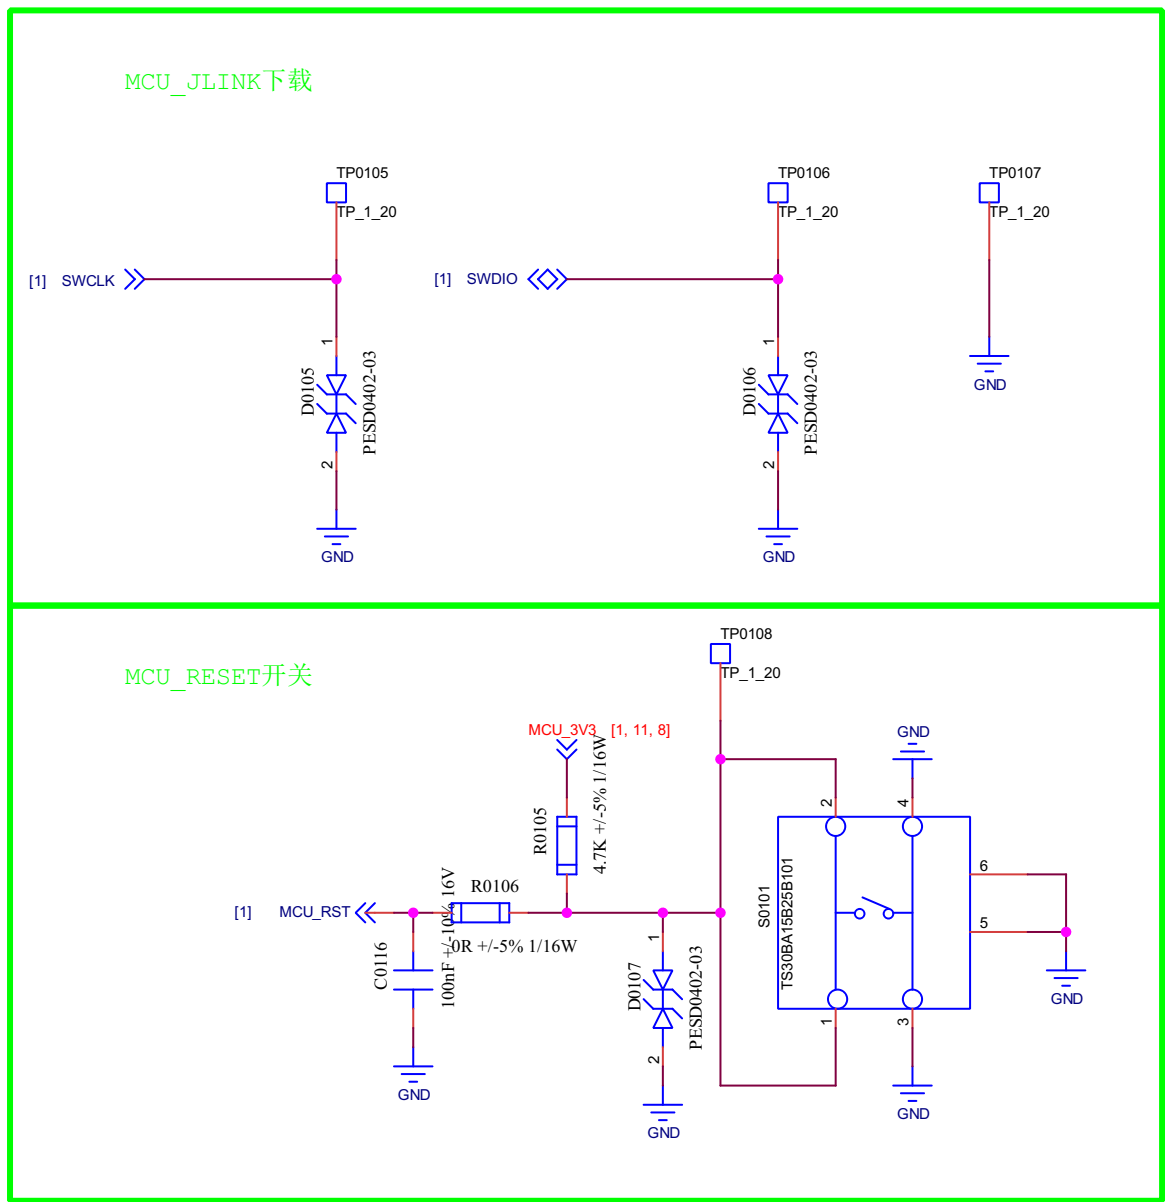
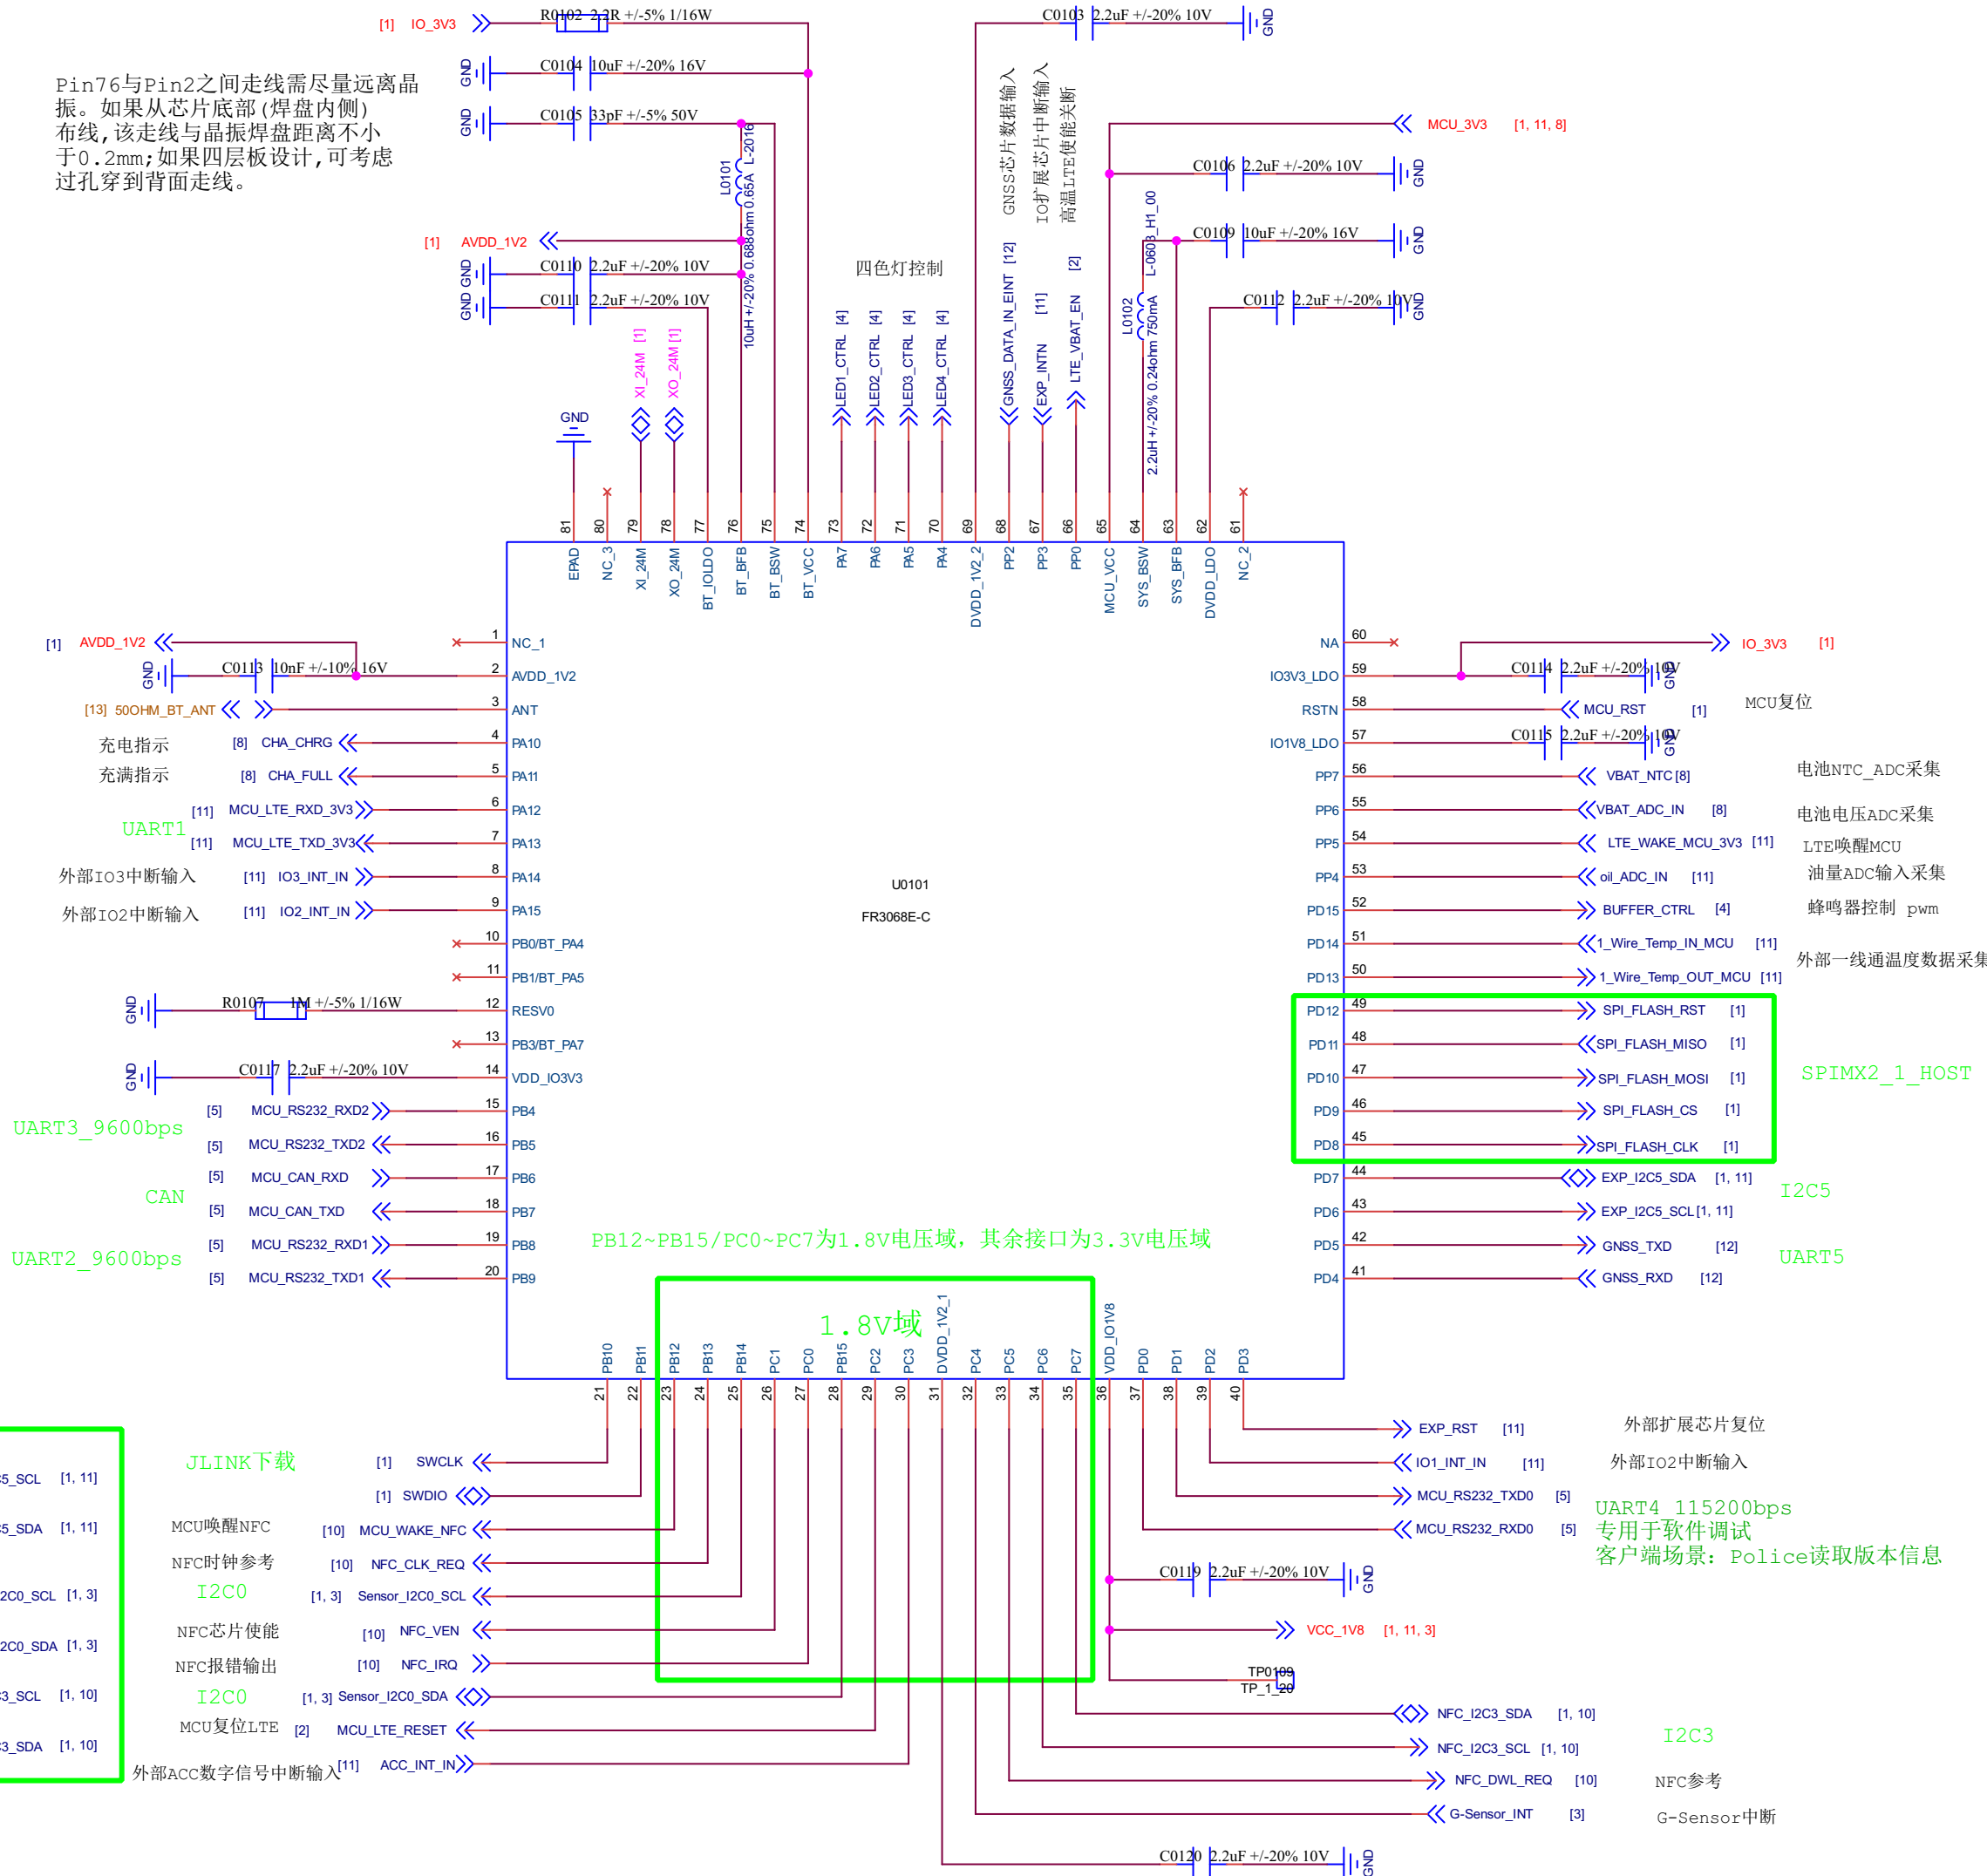



Pin76与Pin2之间走线需尽量远离晶振。如果从芯片底部(焊盘内侧)布线,该走线与晶振焊盘距离不小于0.2mm;如果四层板设计,可考虑过孔穿到背面走线。

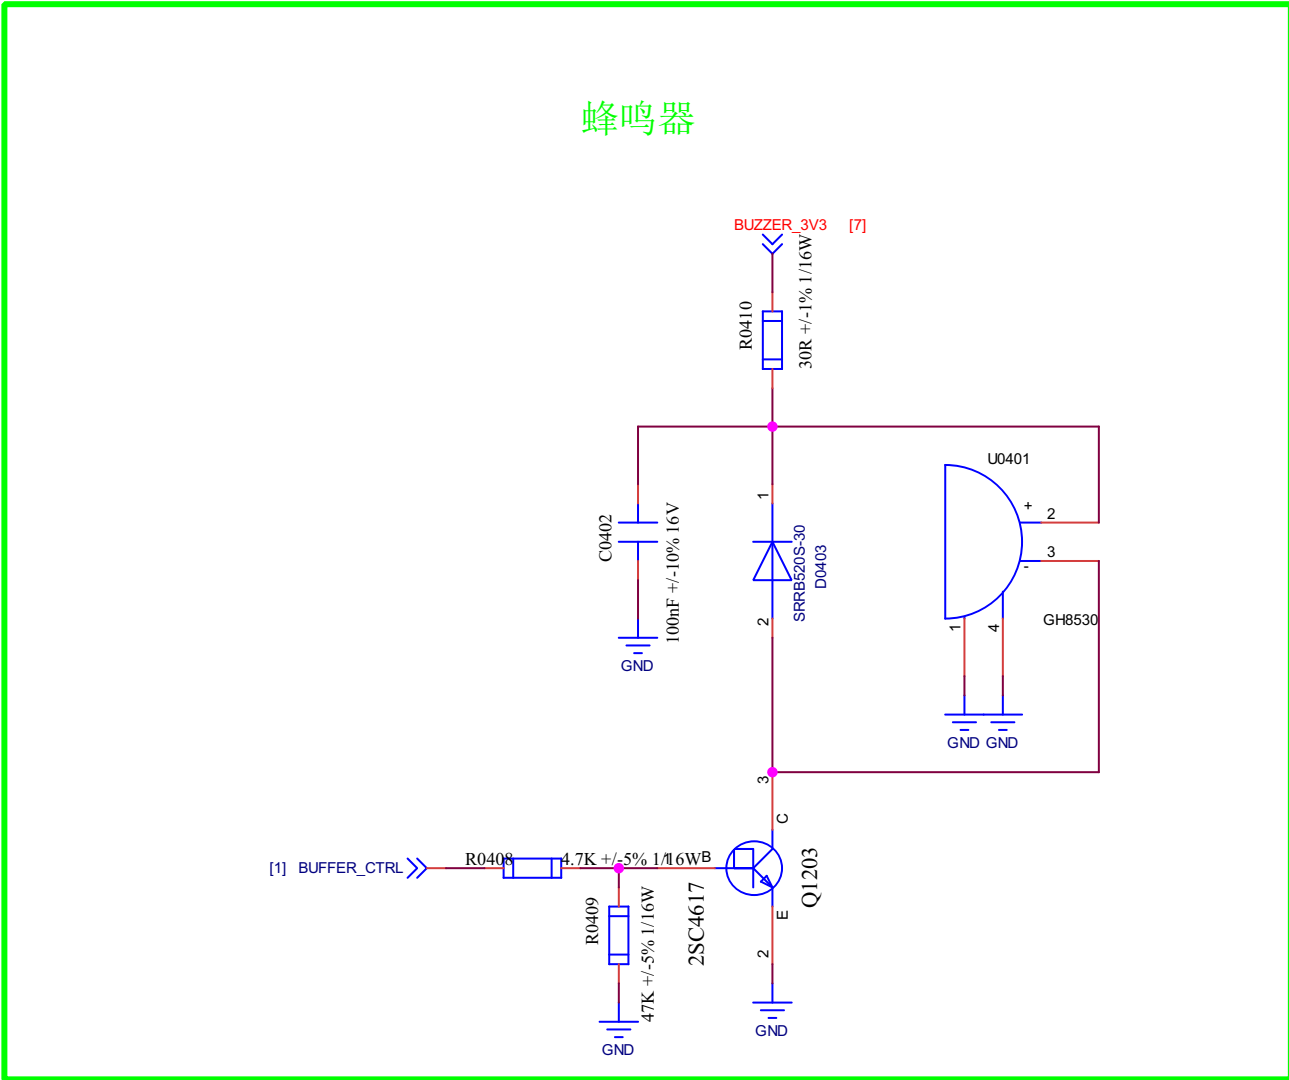


Quectel Wireless Solutions				
PROJECT QEM800QA-FYN01AA-MB_SCH_V1.1_20260923				VER V1.1
DRAWN BY Black			CHECKED BY Harry	
SIZE A2	DATE 2026-09-23	SHEET 1	OF 15	

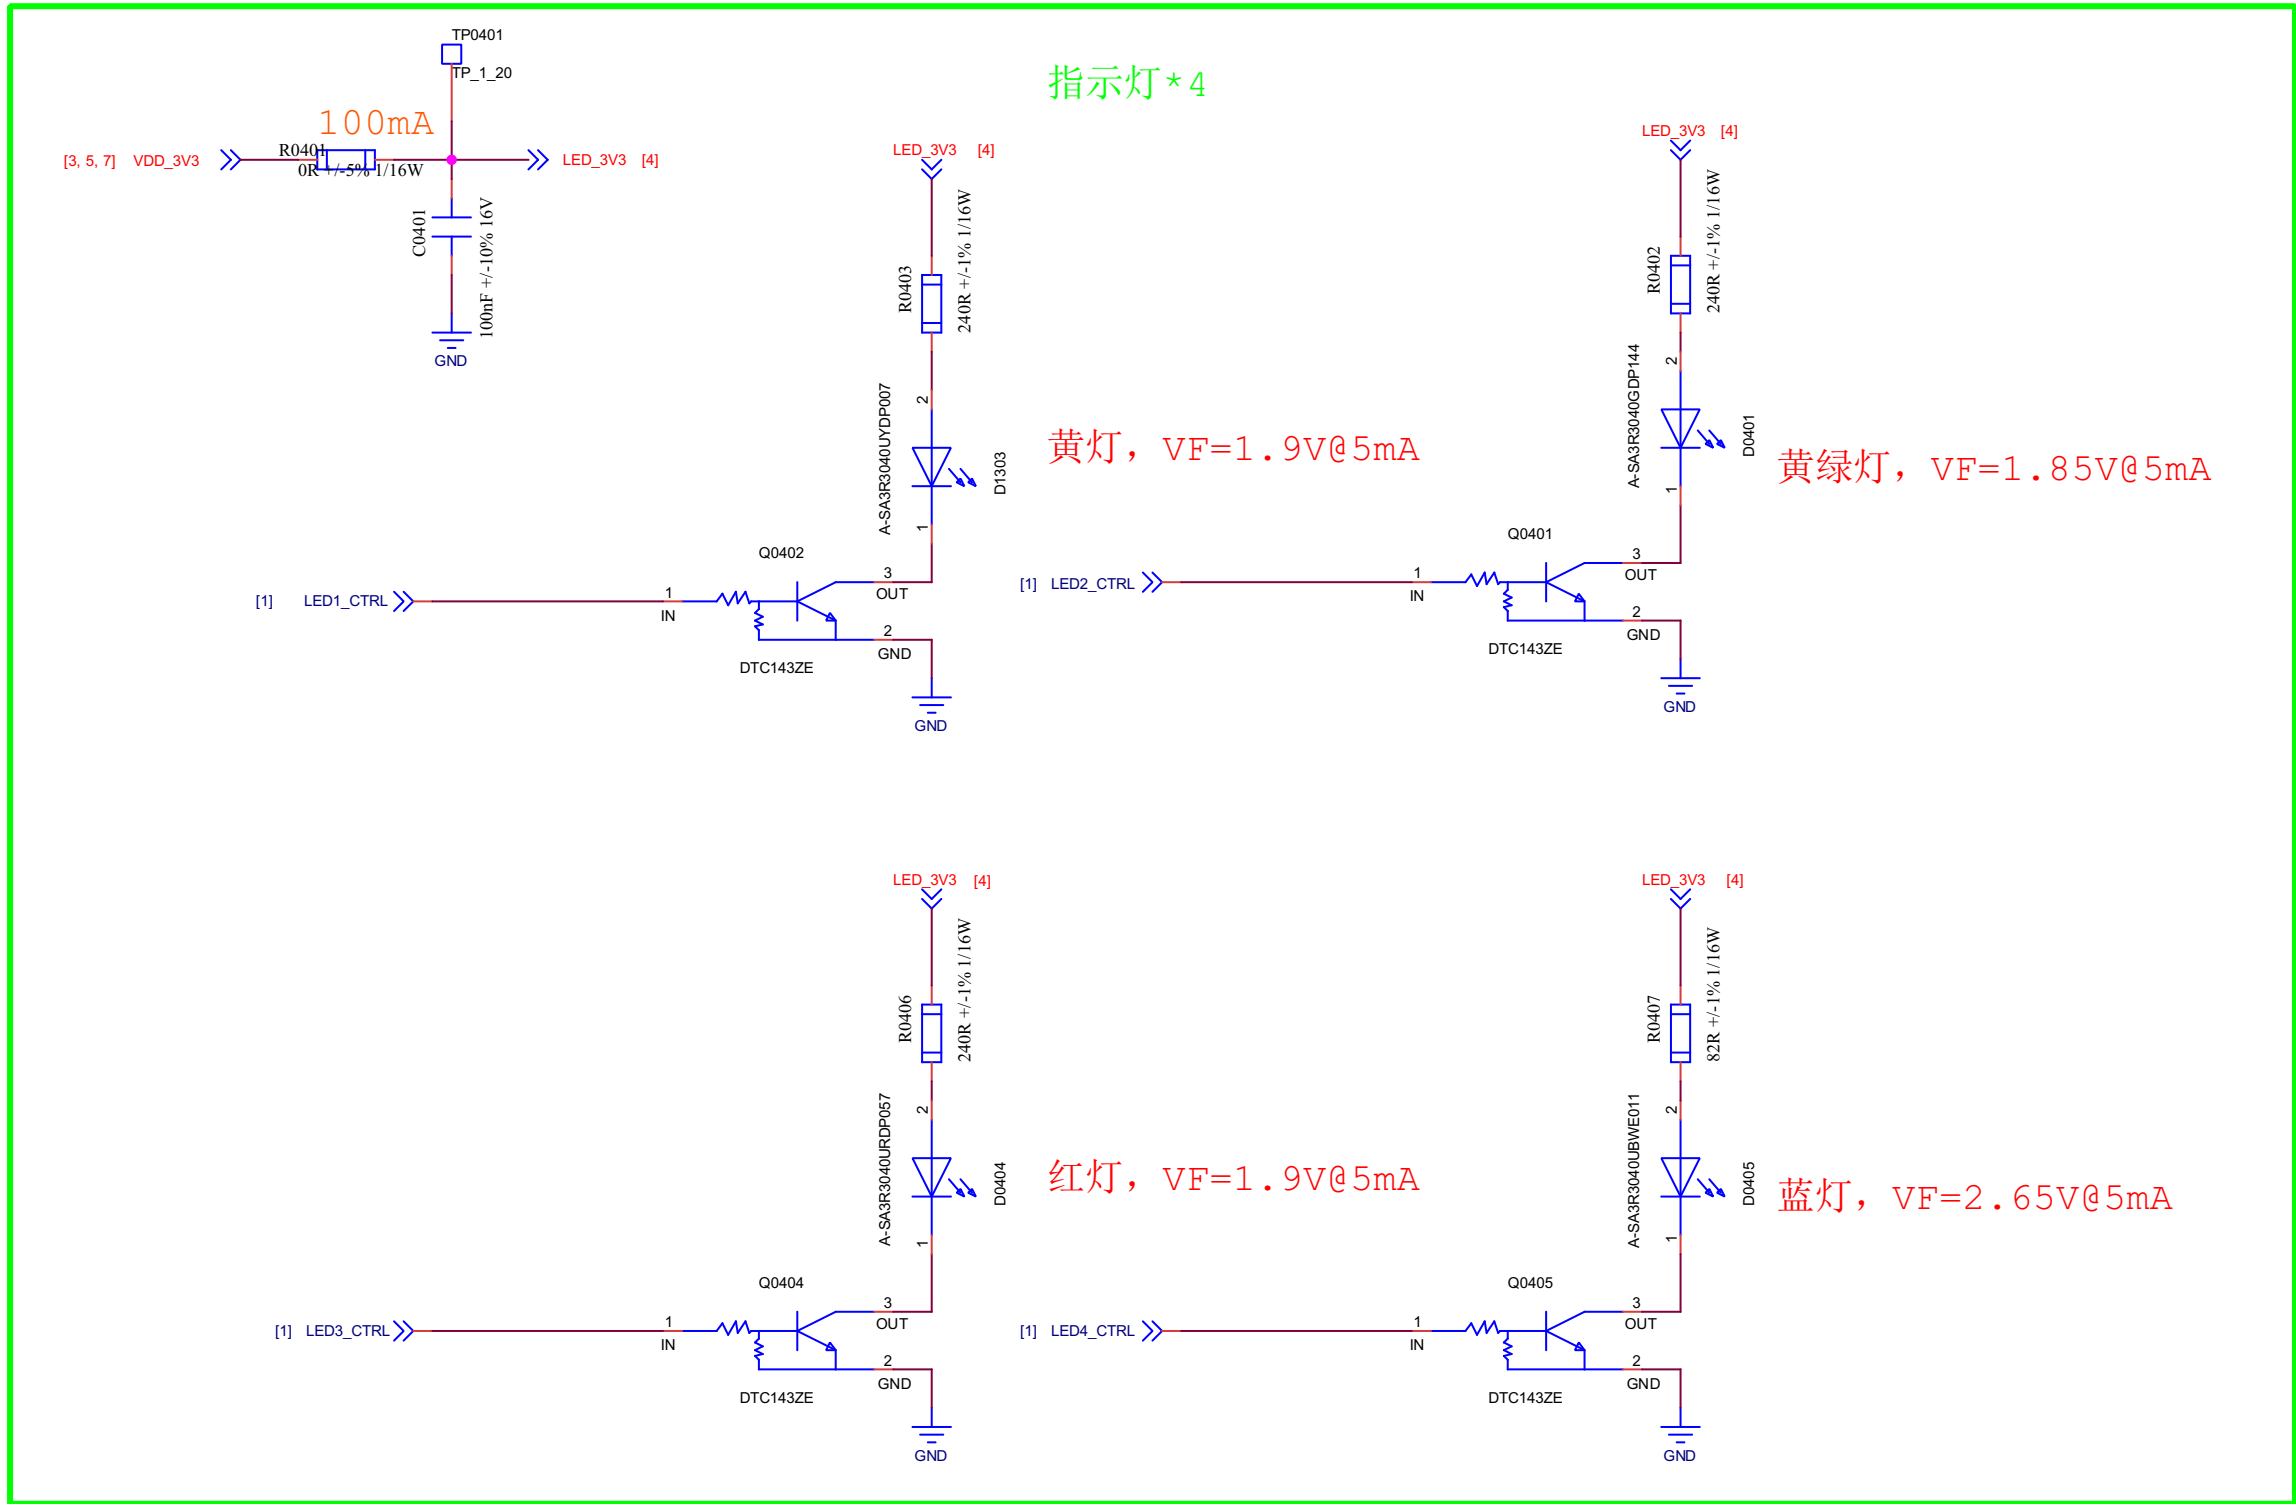


RS232*3

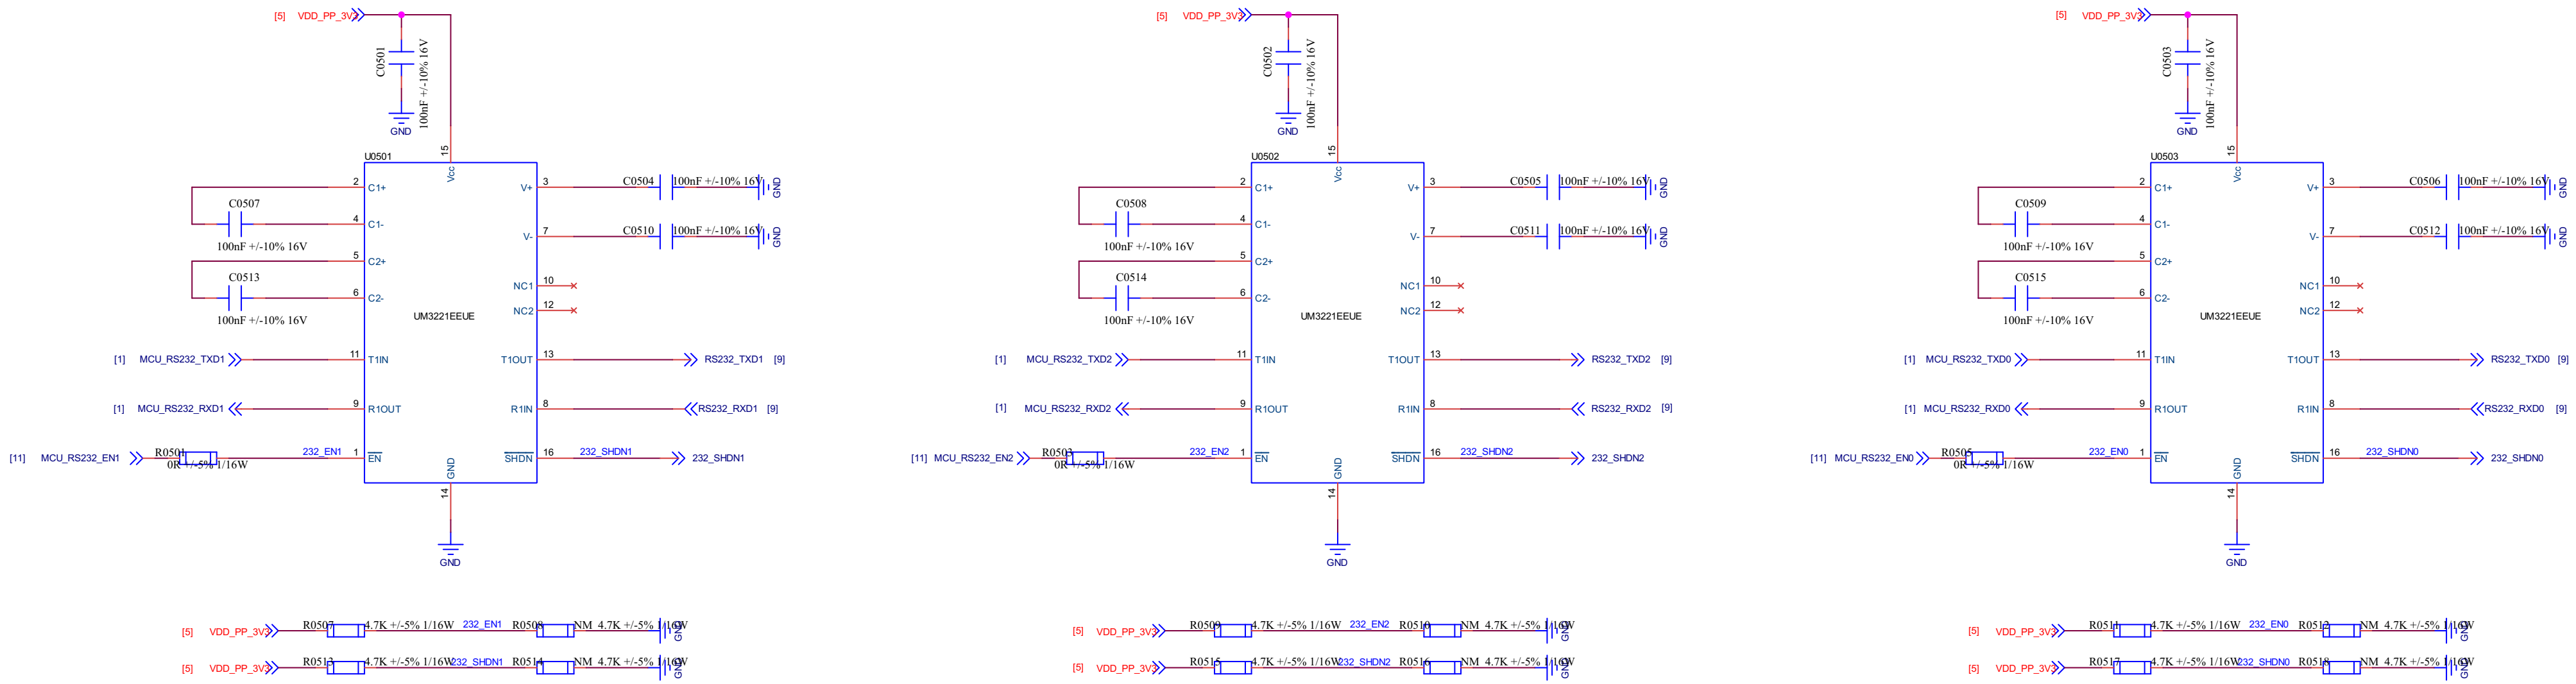


RS232_3V3电源开关

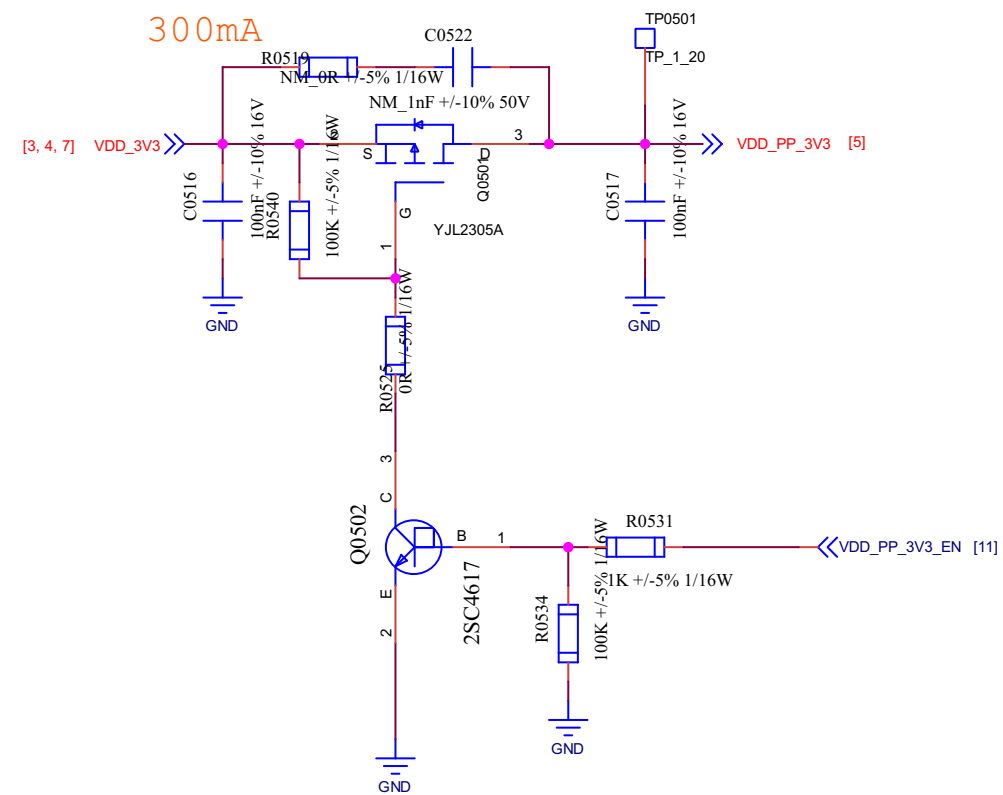

CAN转换器


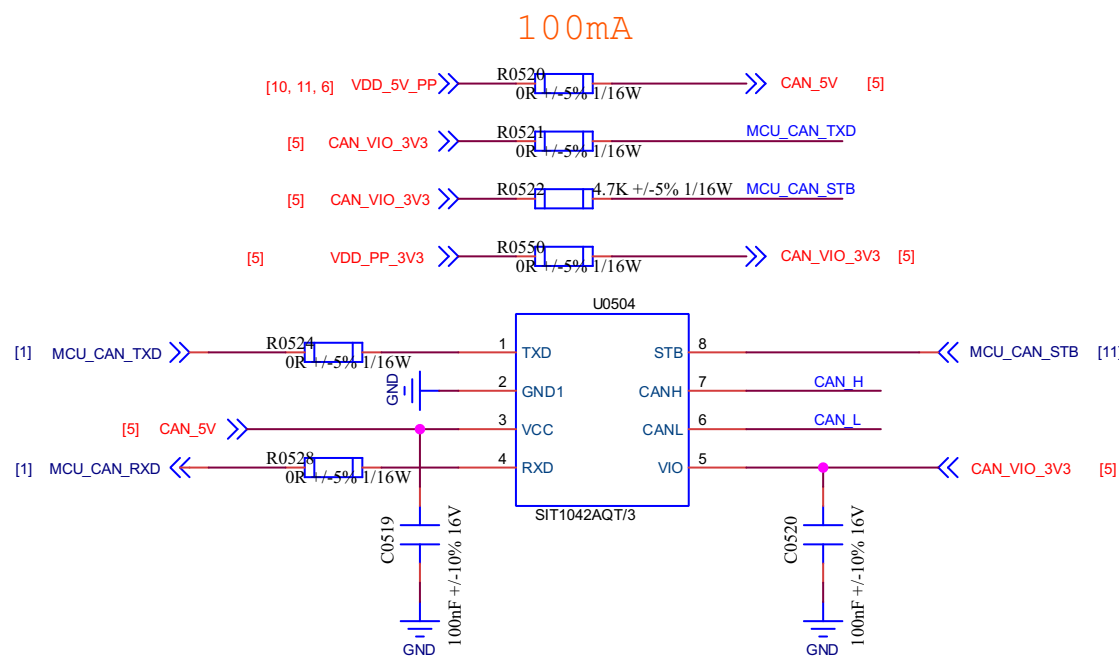



差分走线



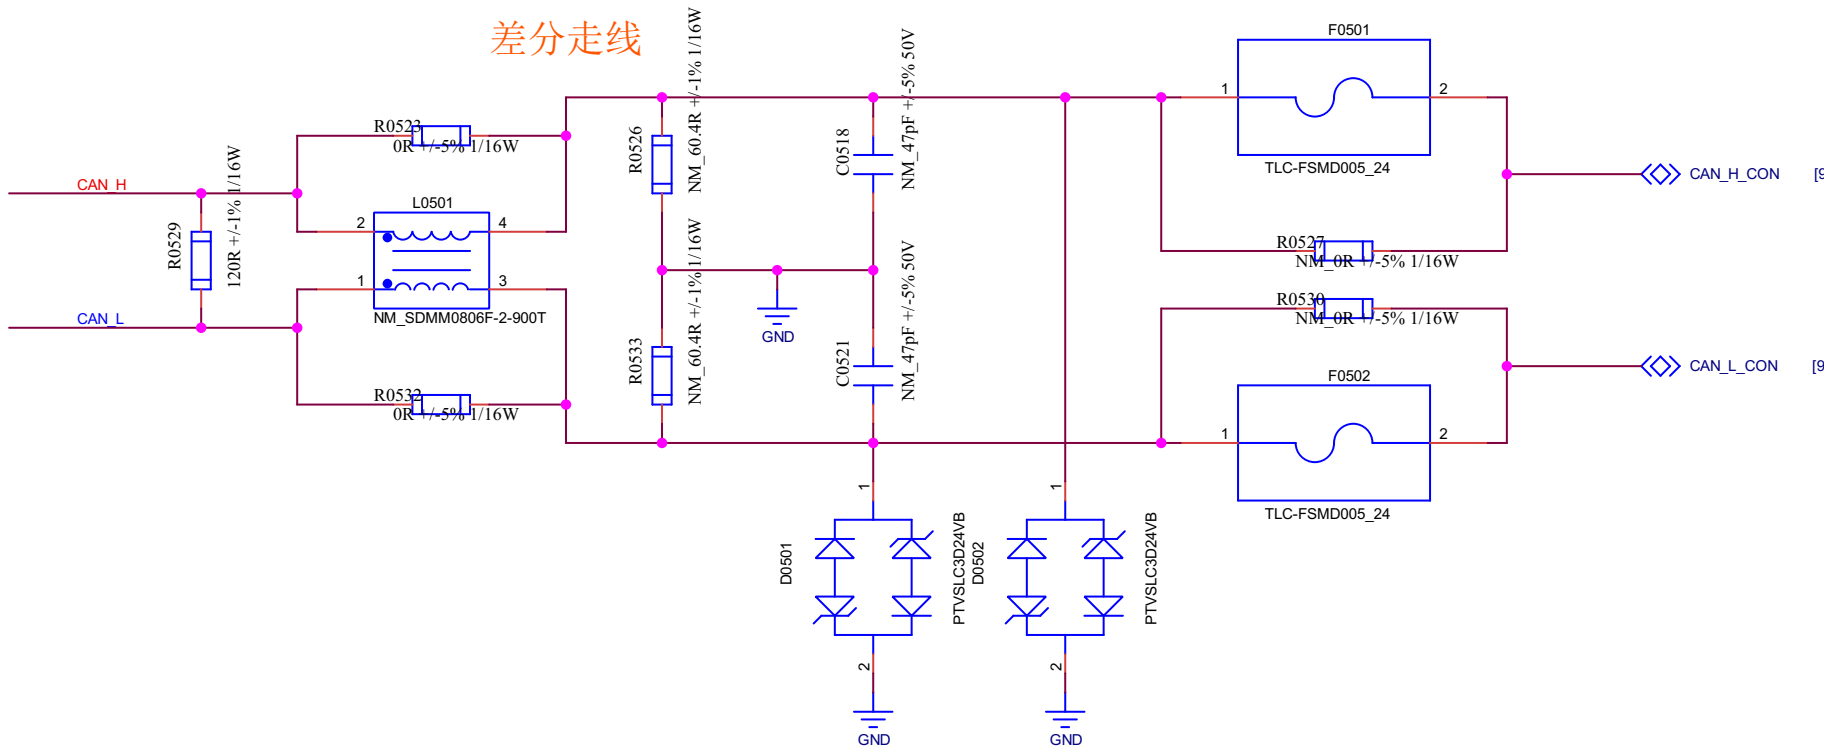



Quectel Wireless Solutions

PROJECT		VER	
QEM800QA-FYN01AA-MB_SCH_V1.1_20260923		V1.1	
DRAWN BY		CHECKED BY	
Black		Harry	
SIZE	A2	DATE	2026-09-23
SHEET	5	OF	15

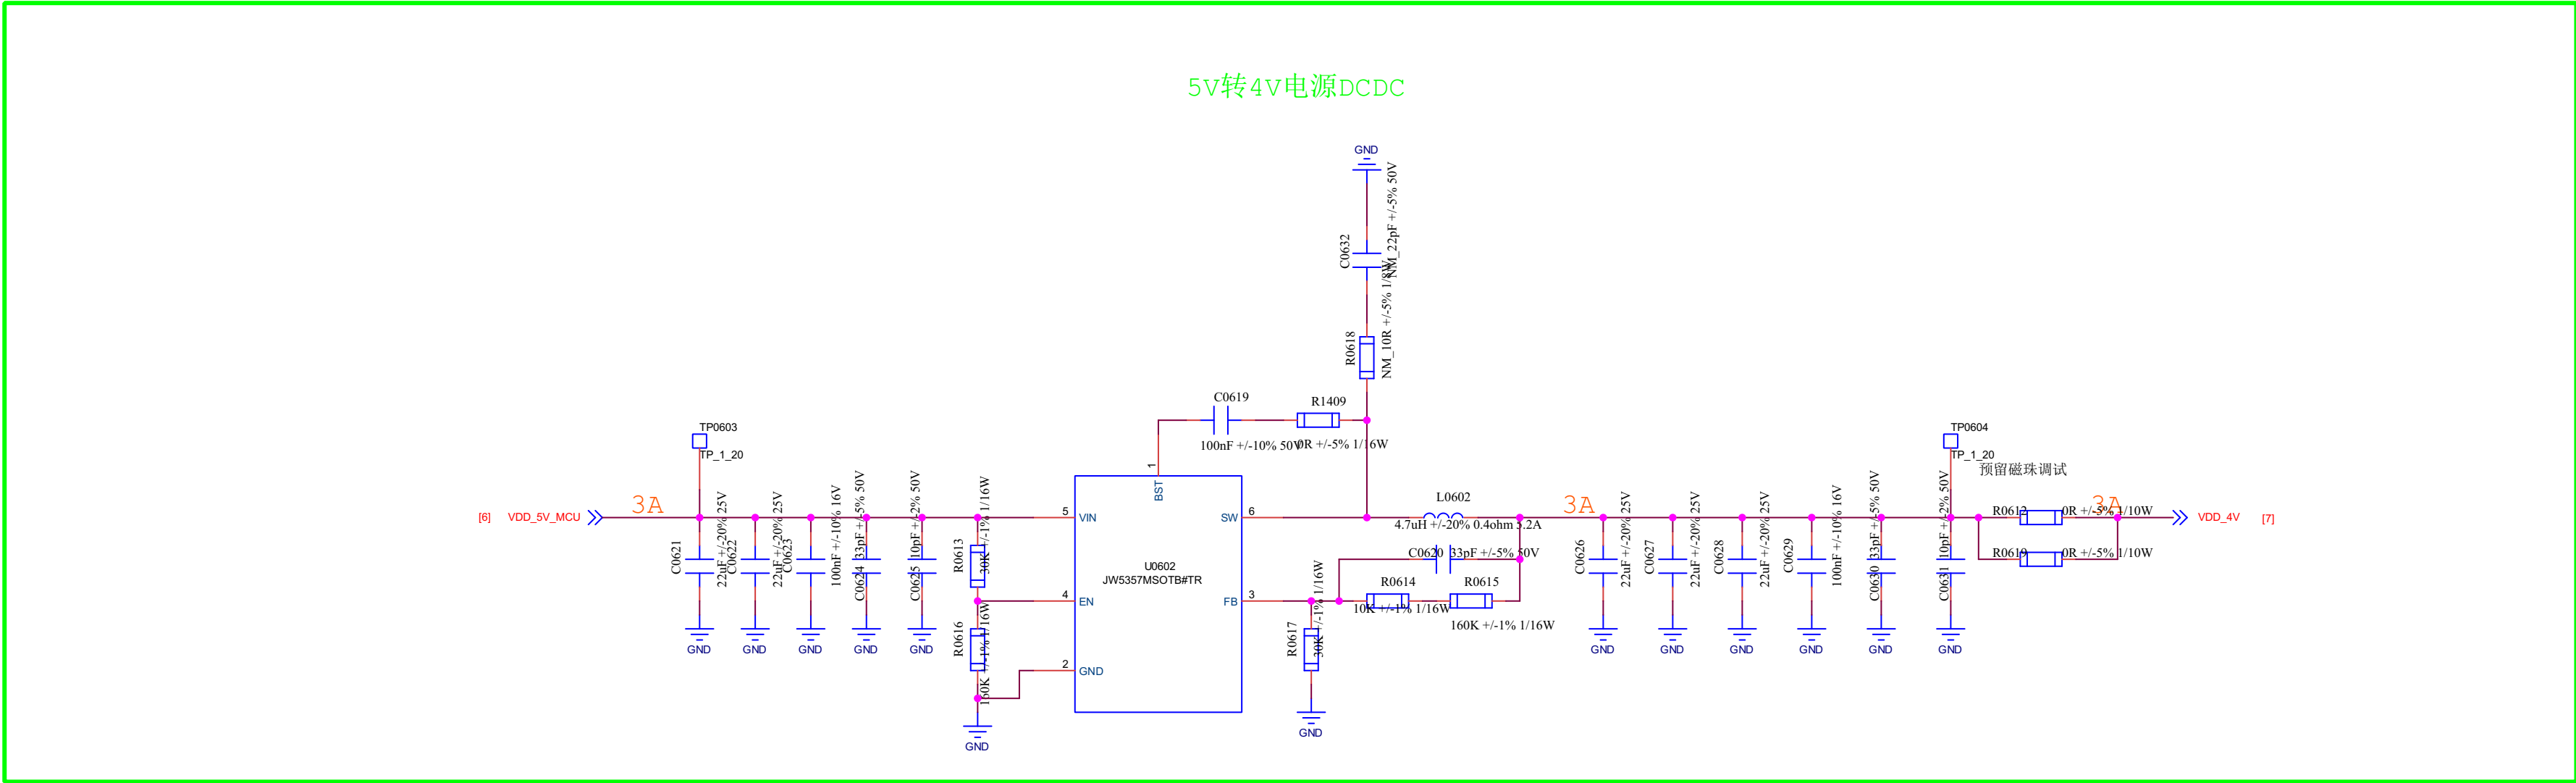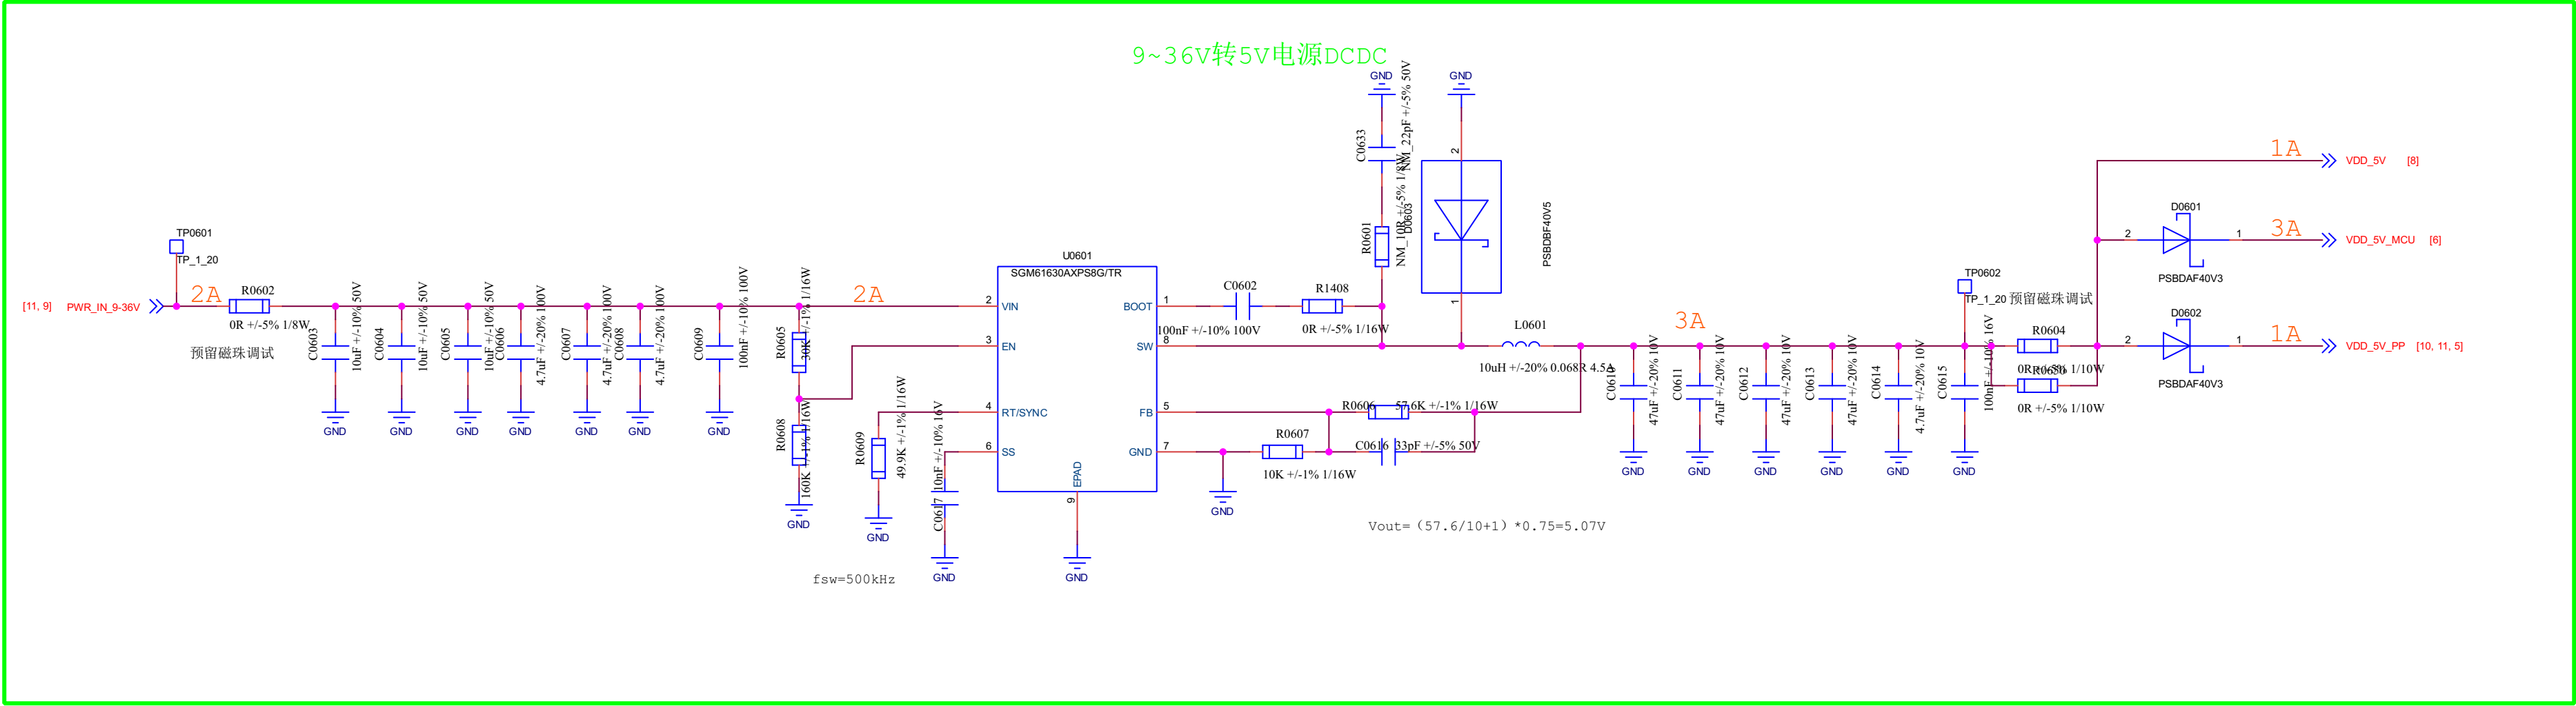


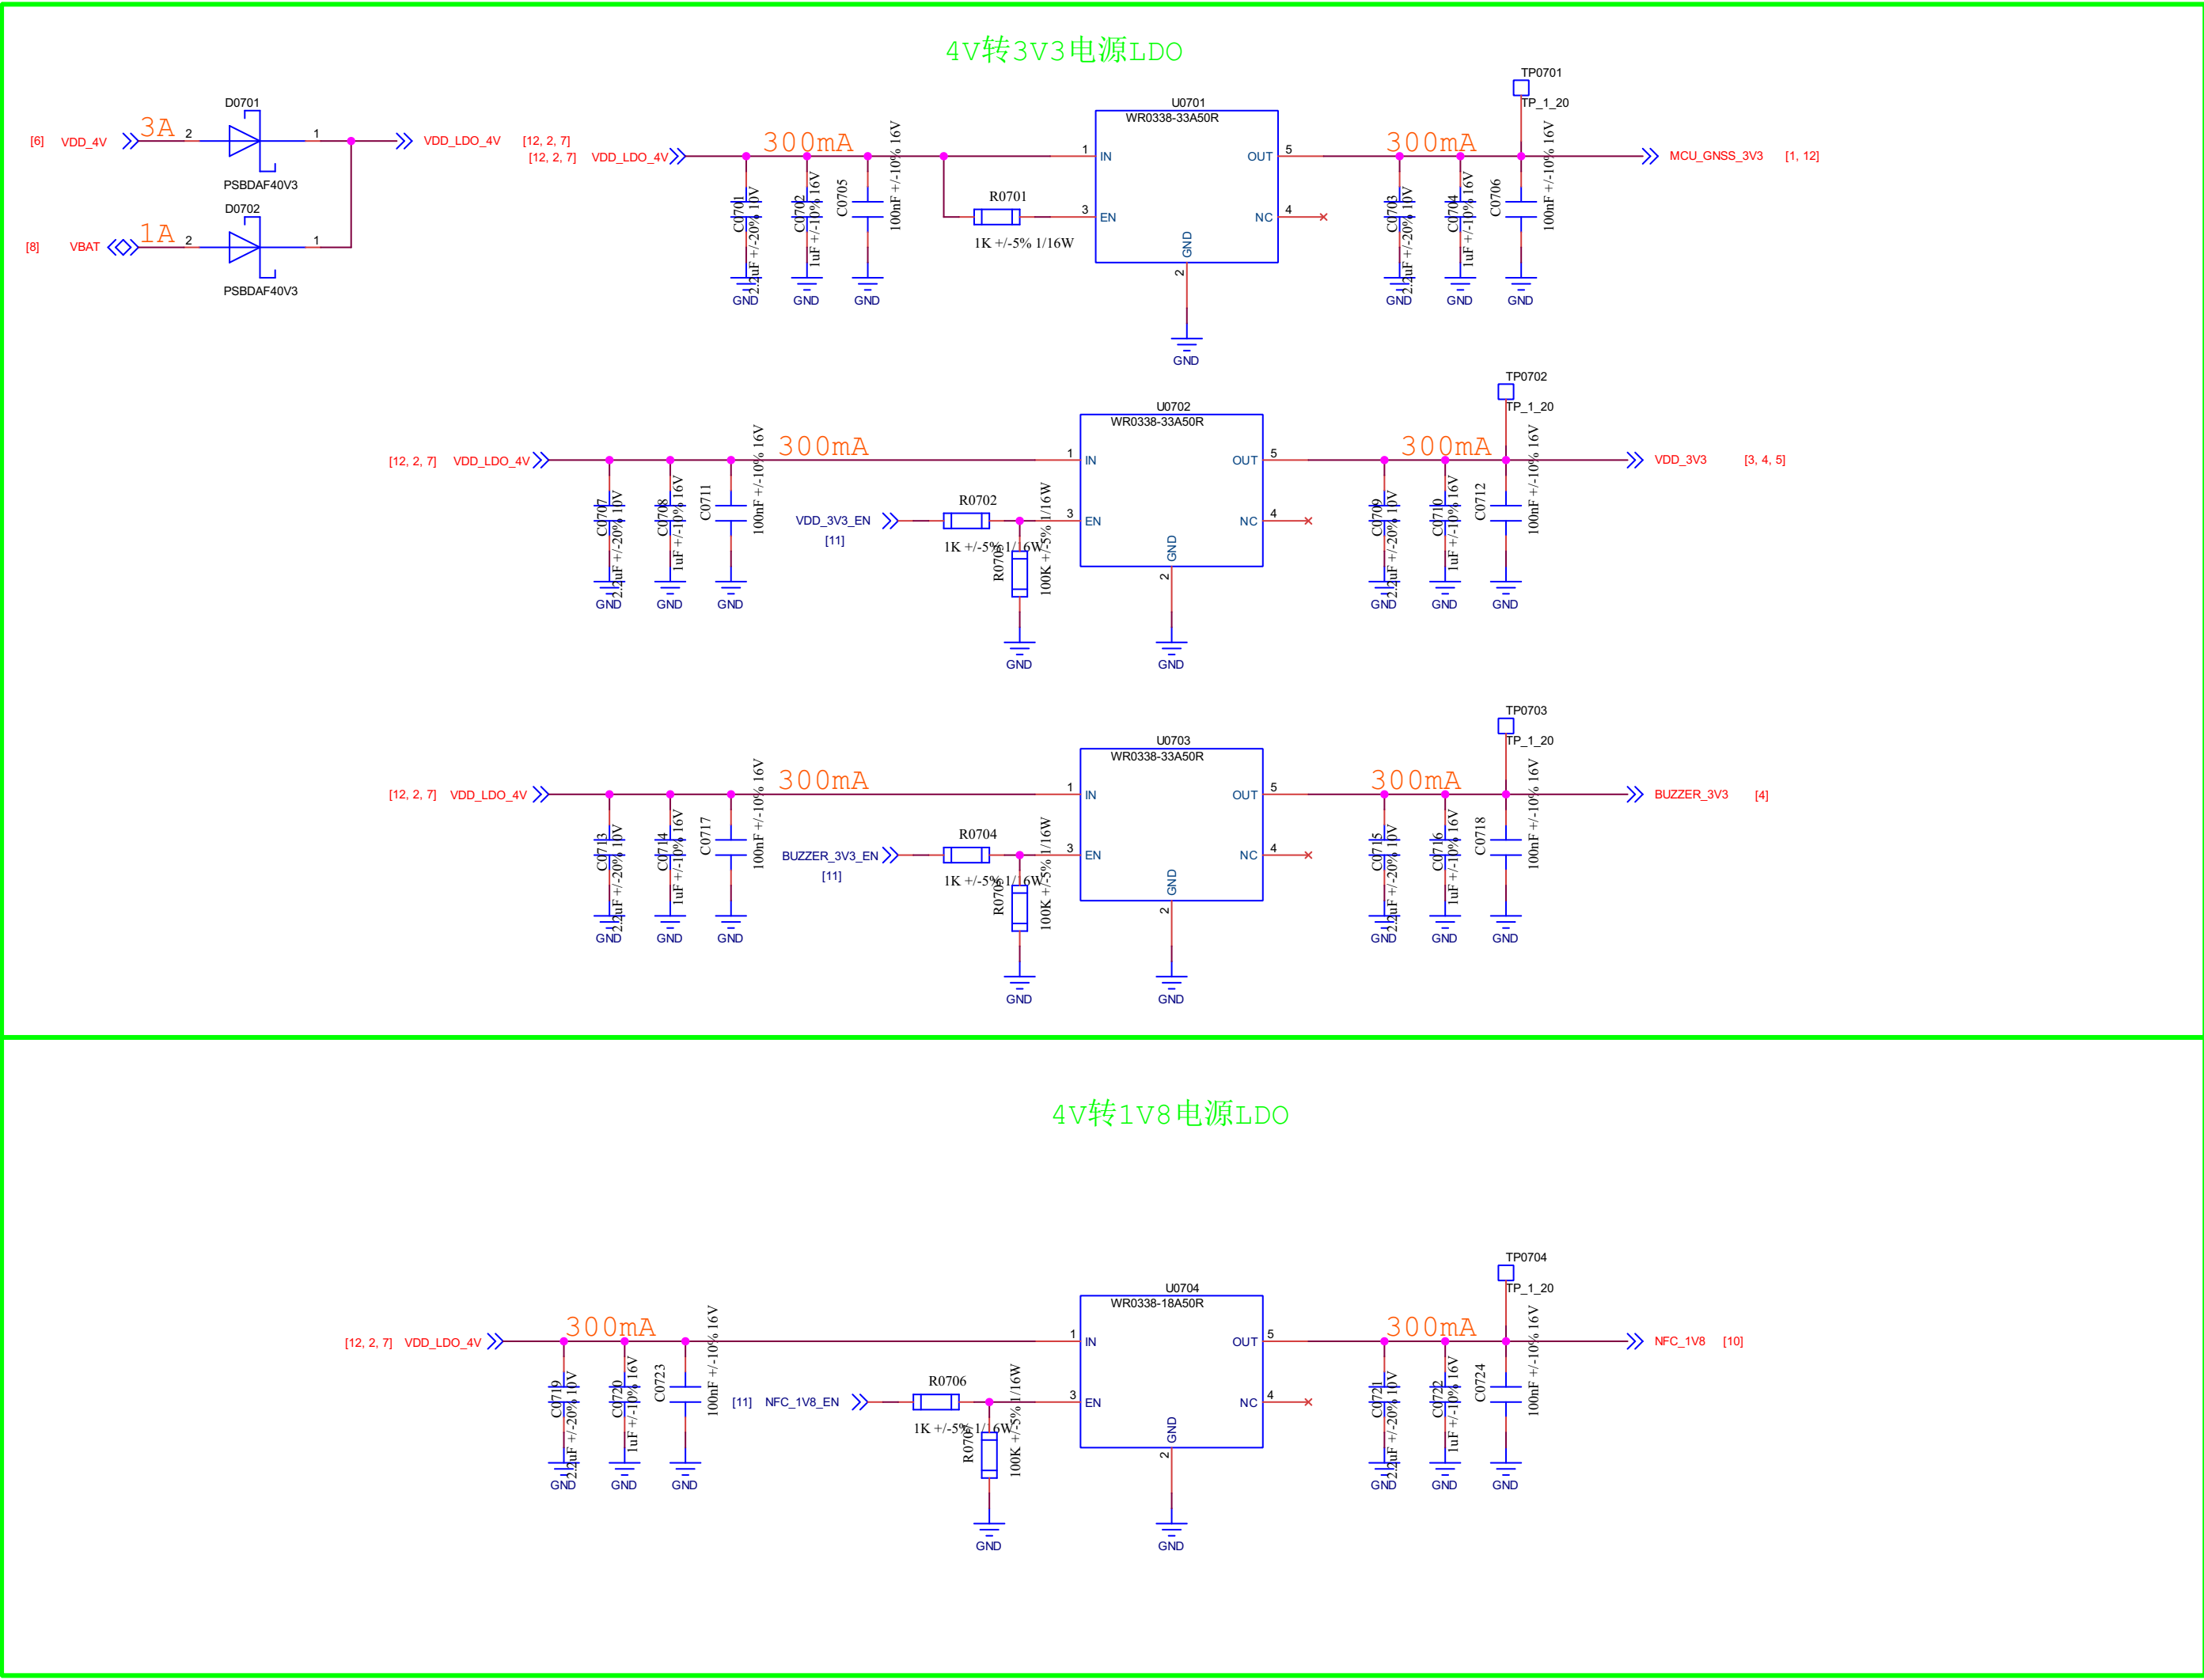

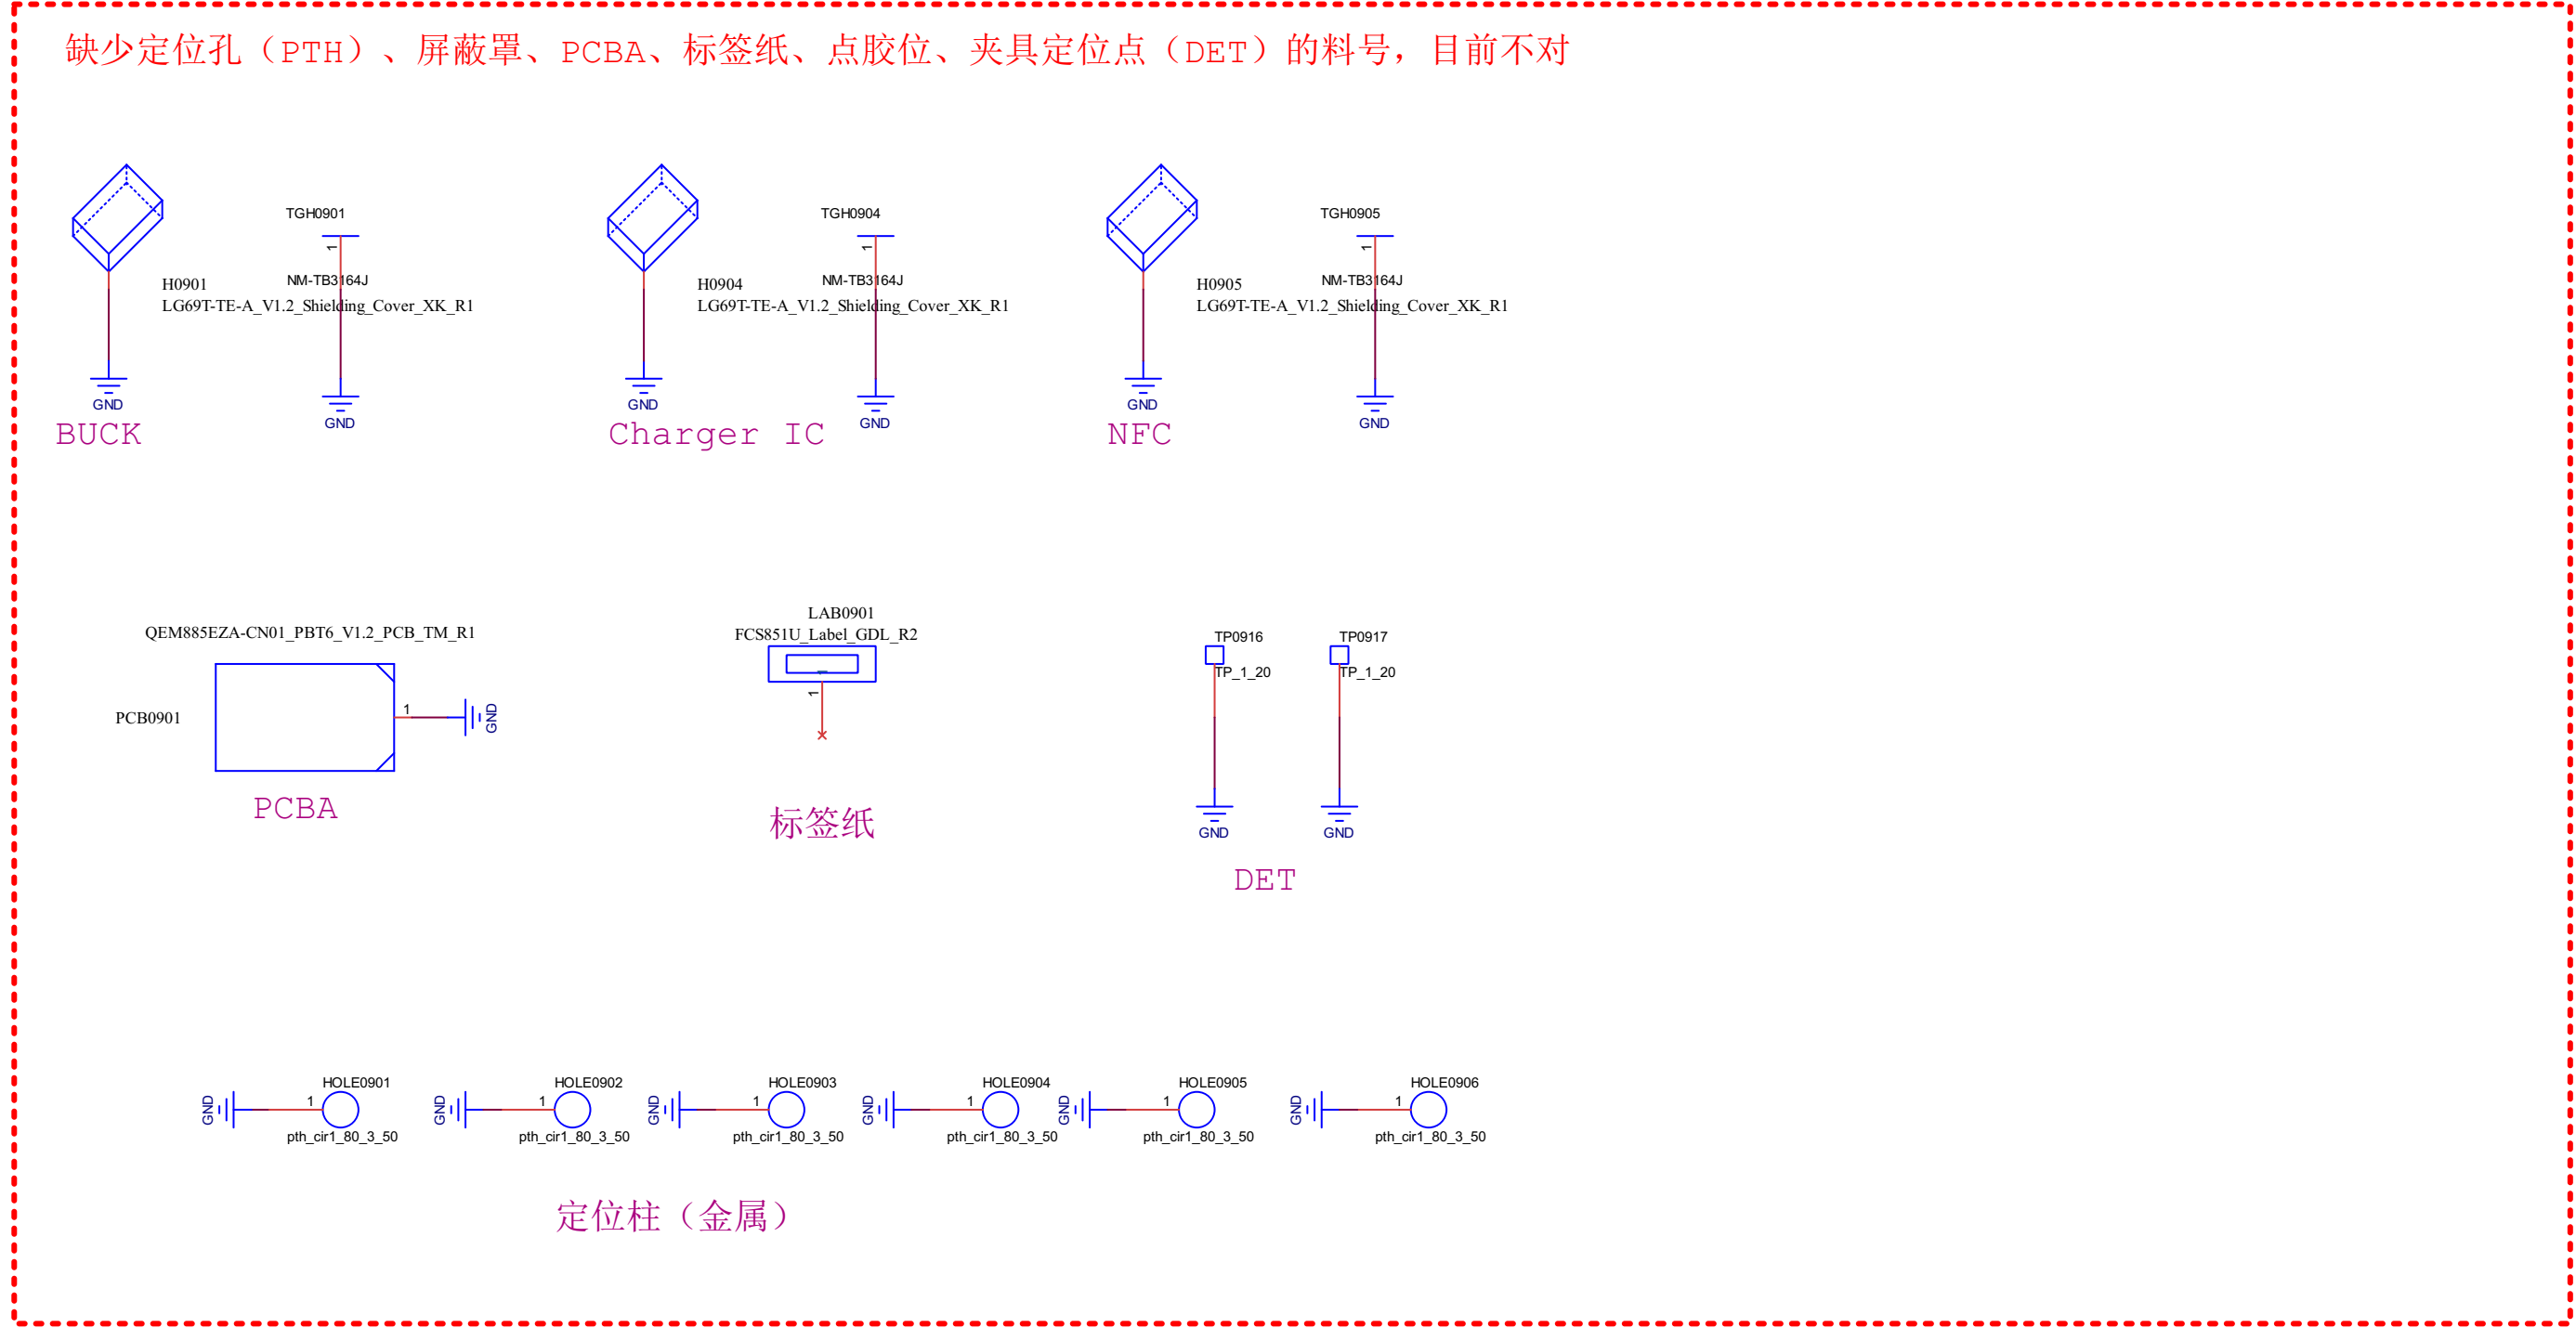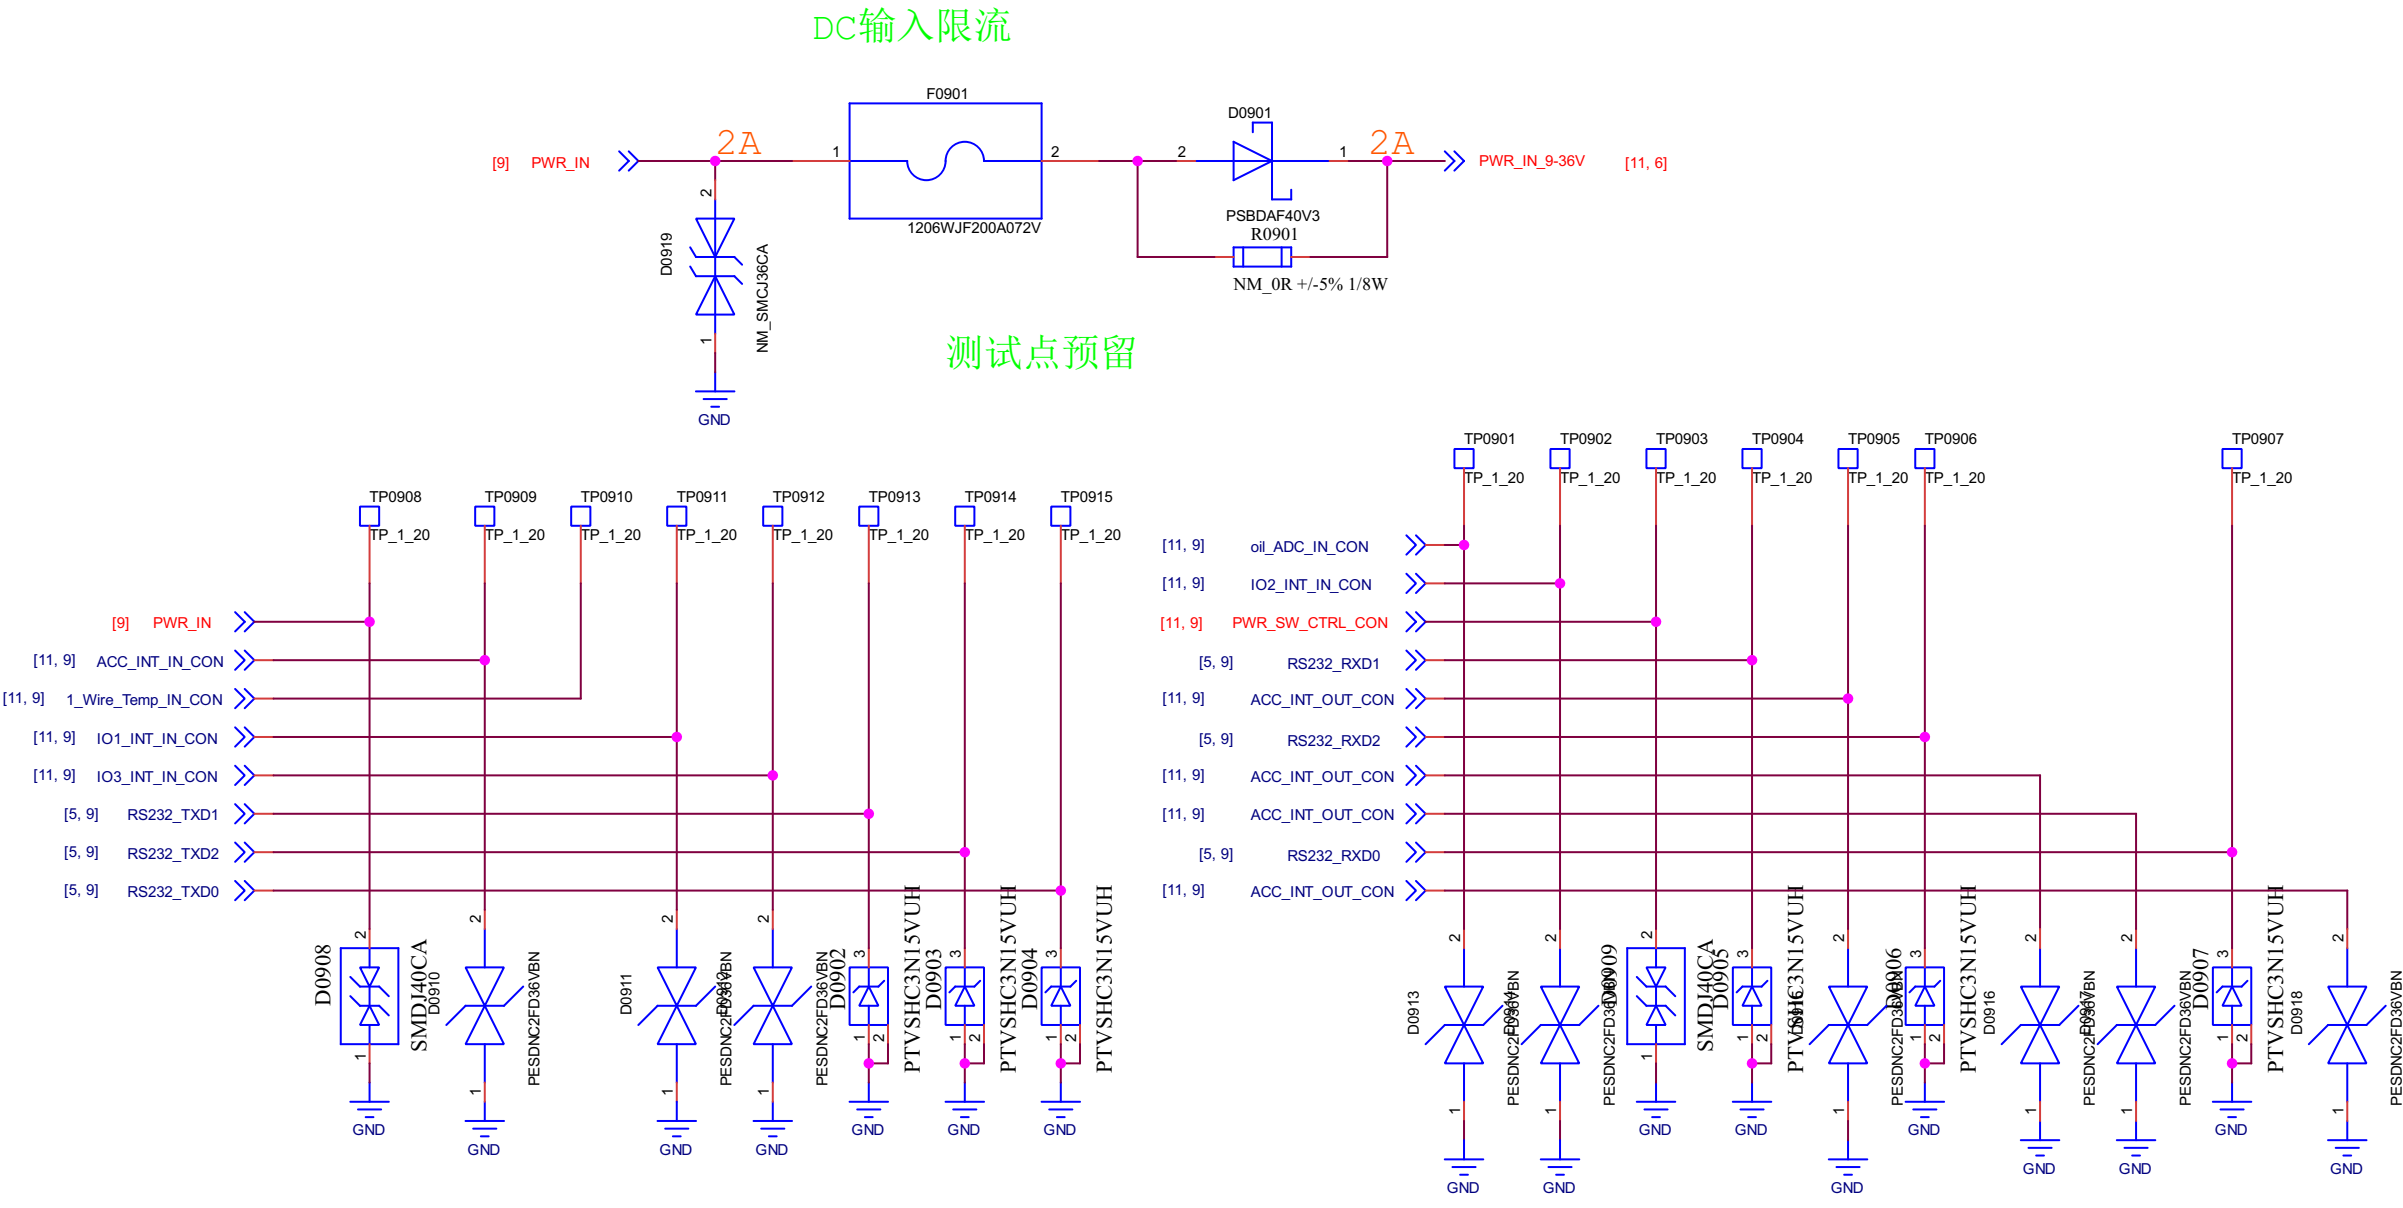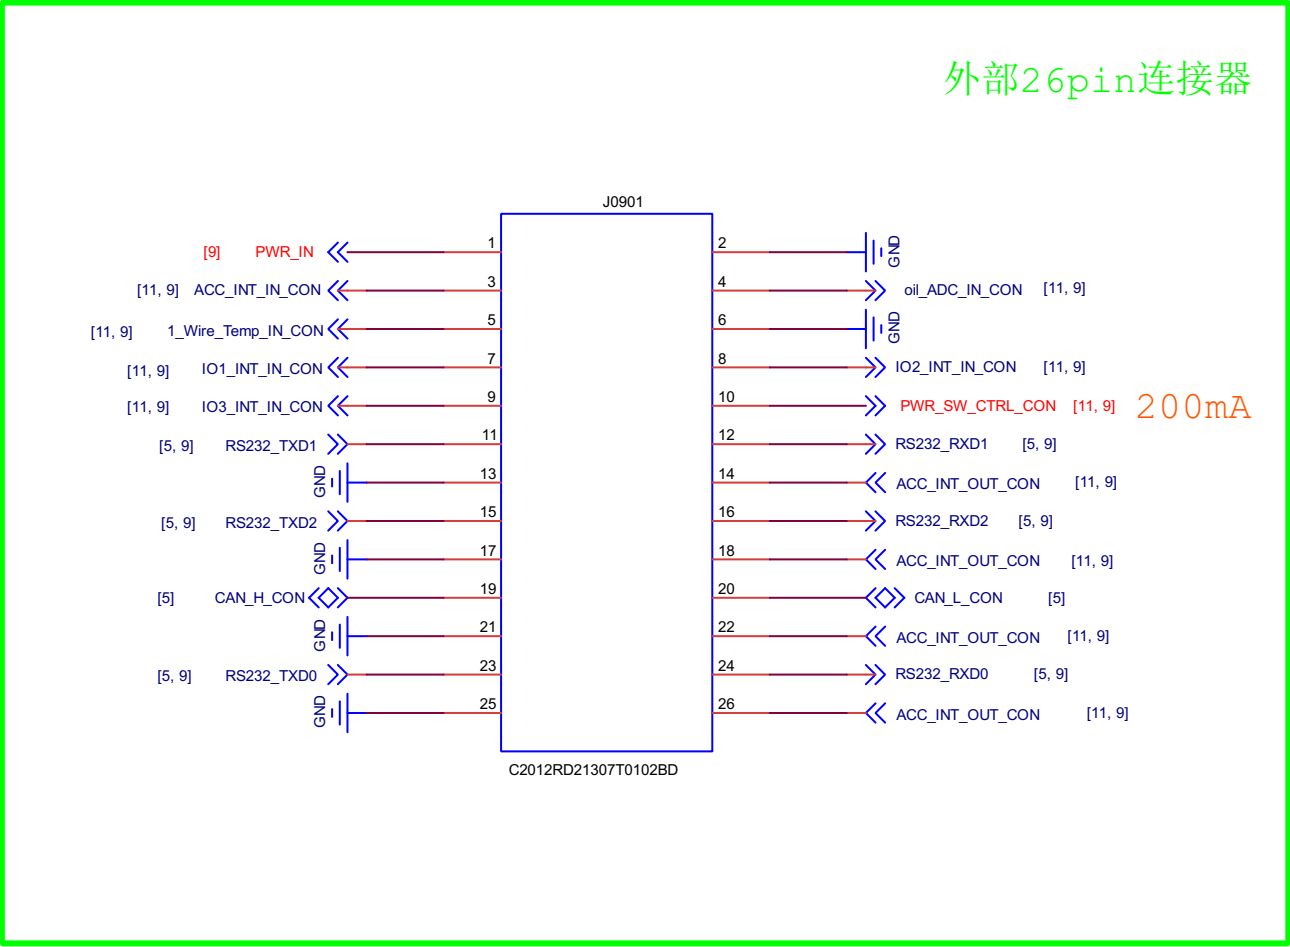


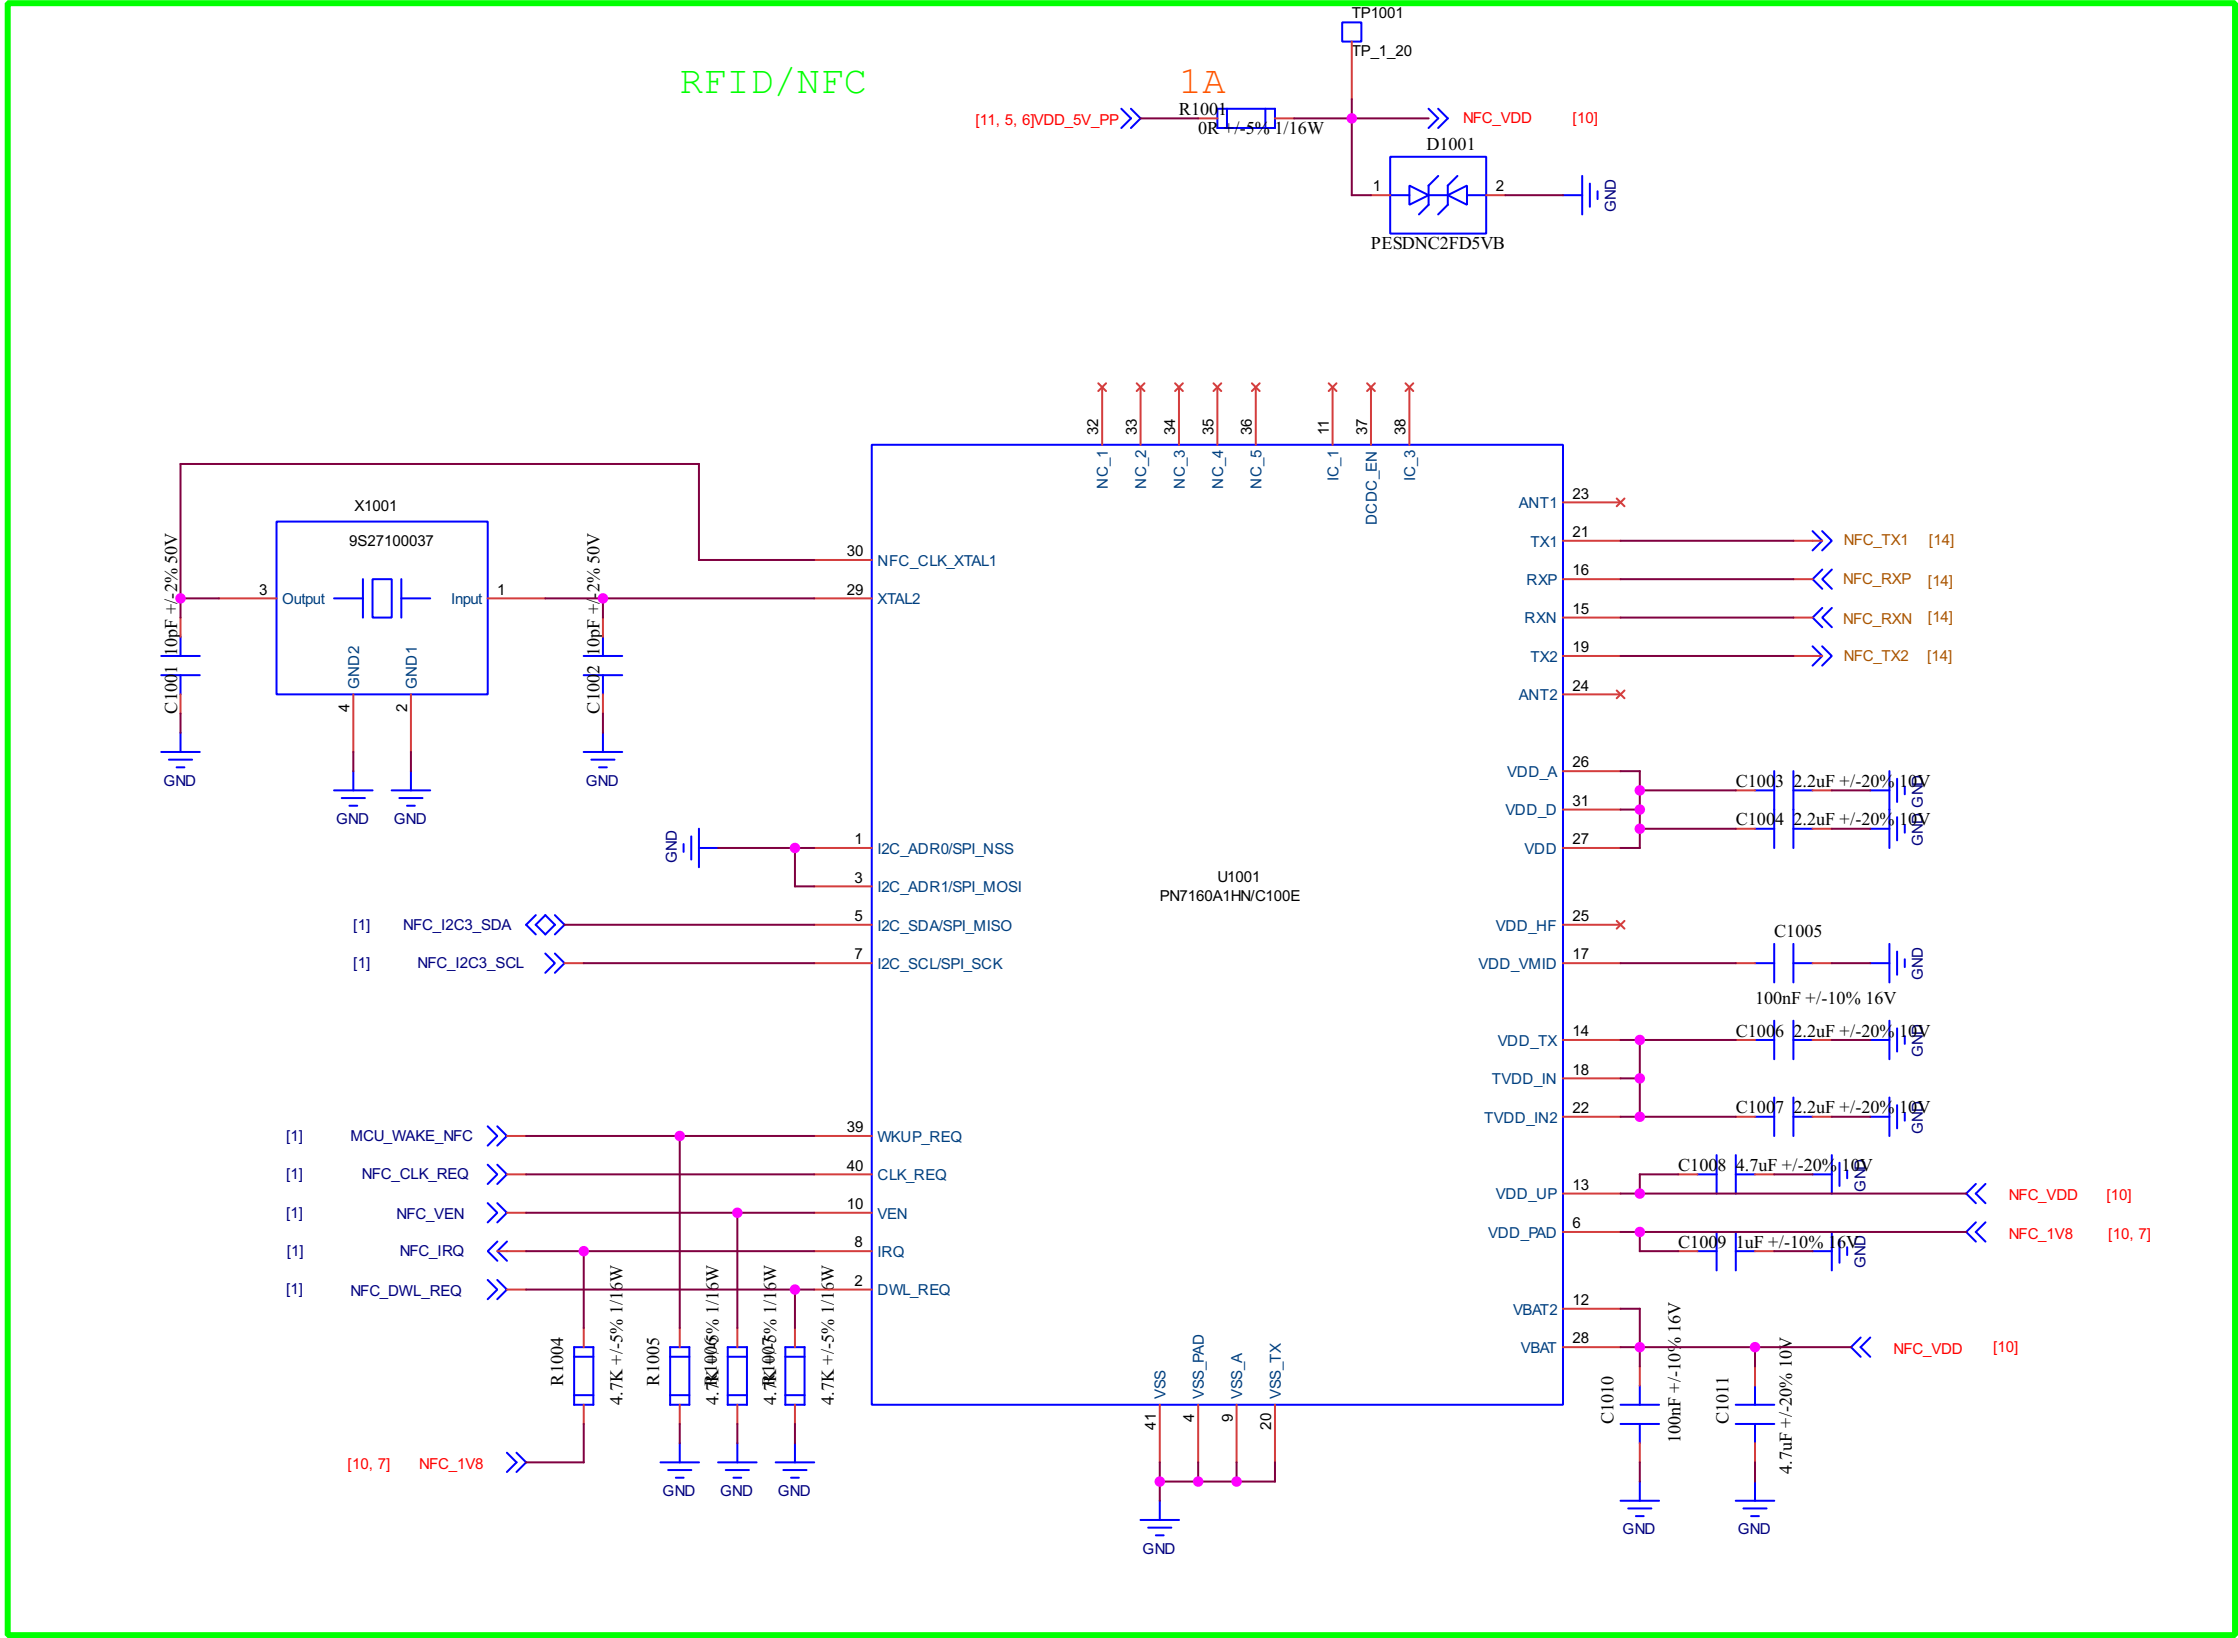


MCU_LTE 电平转换

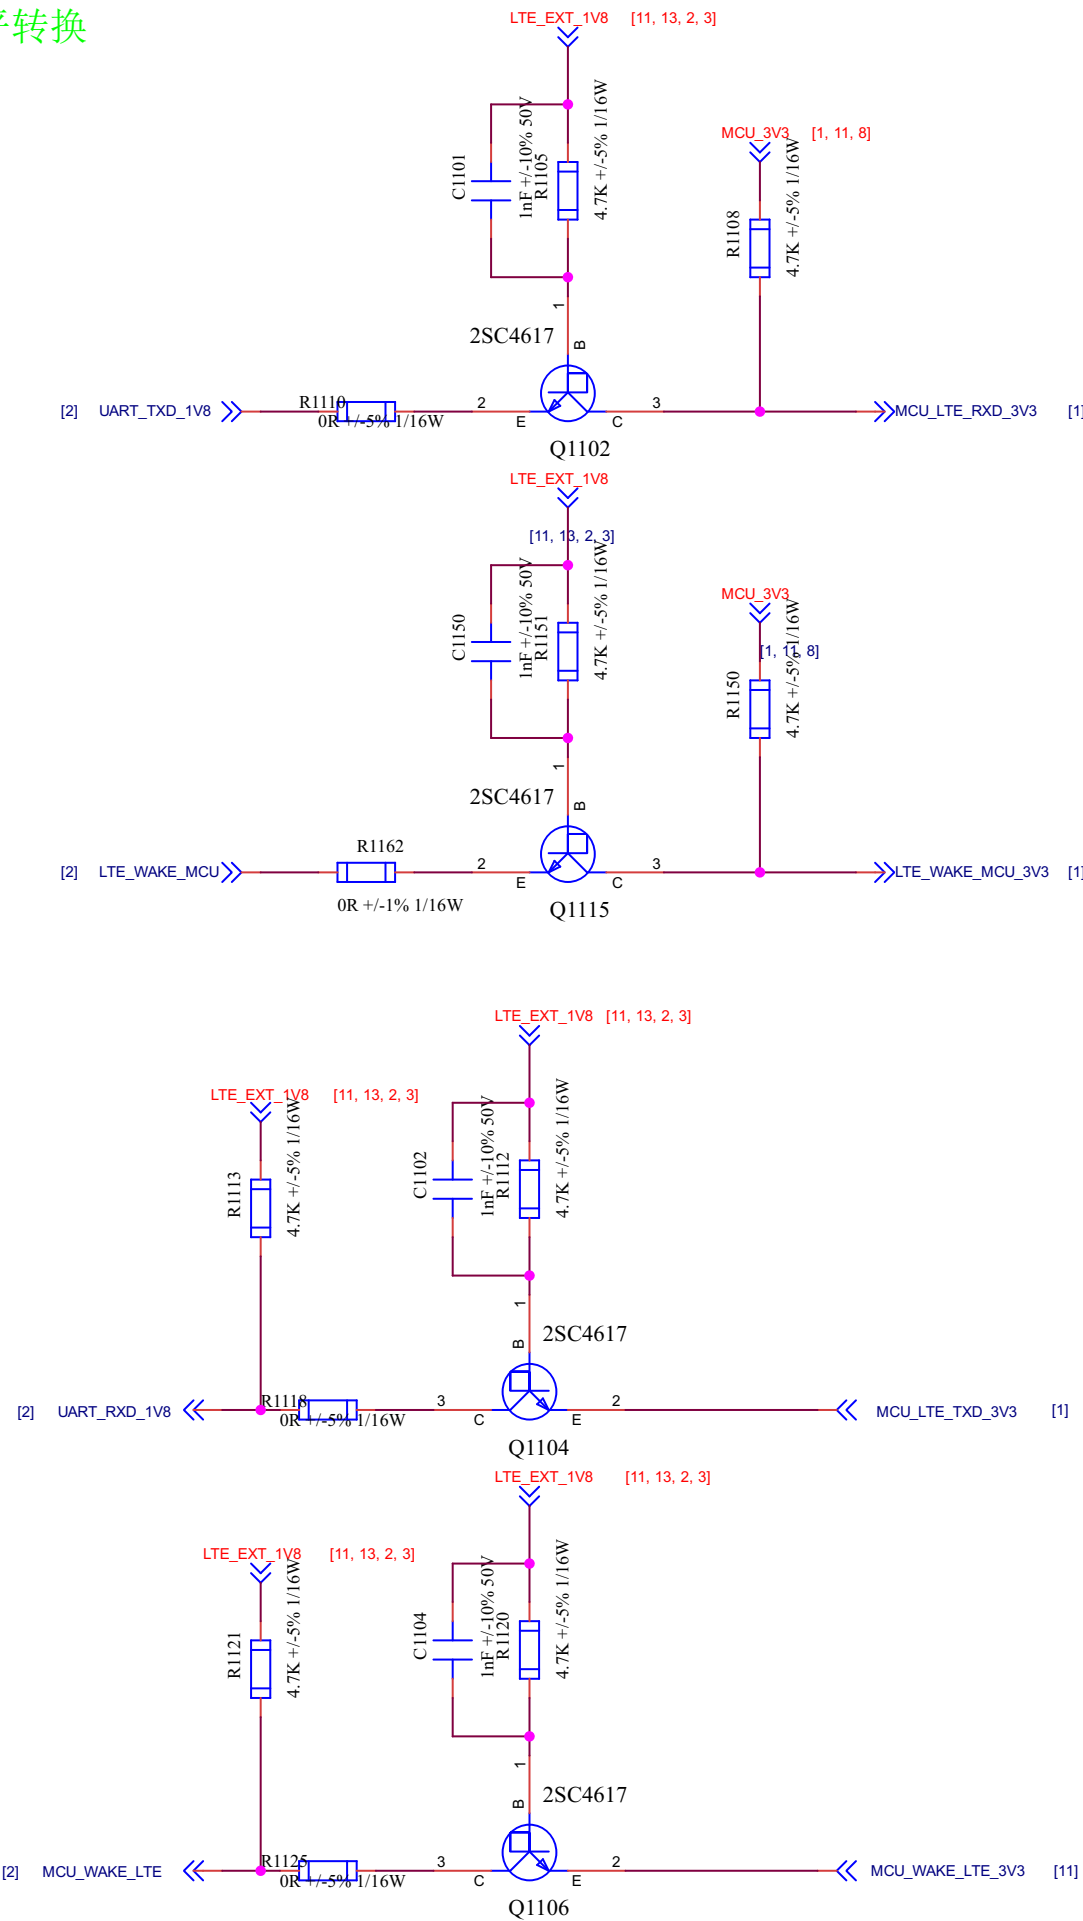


MCU_IO扩展

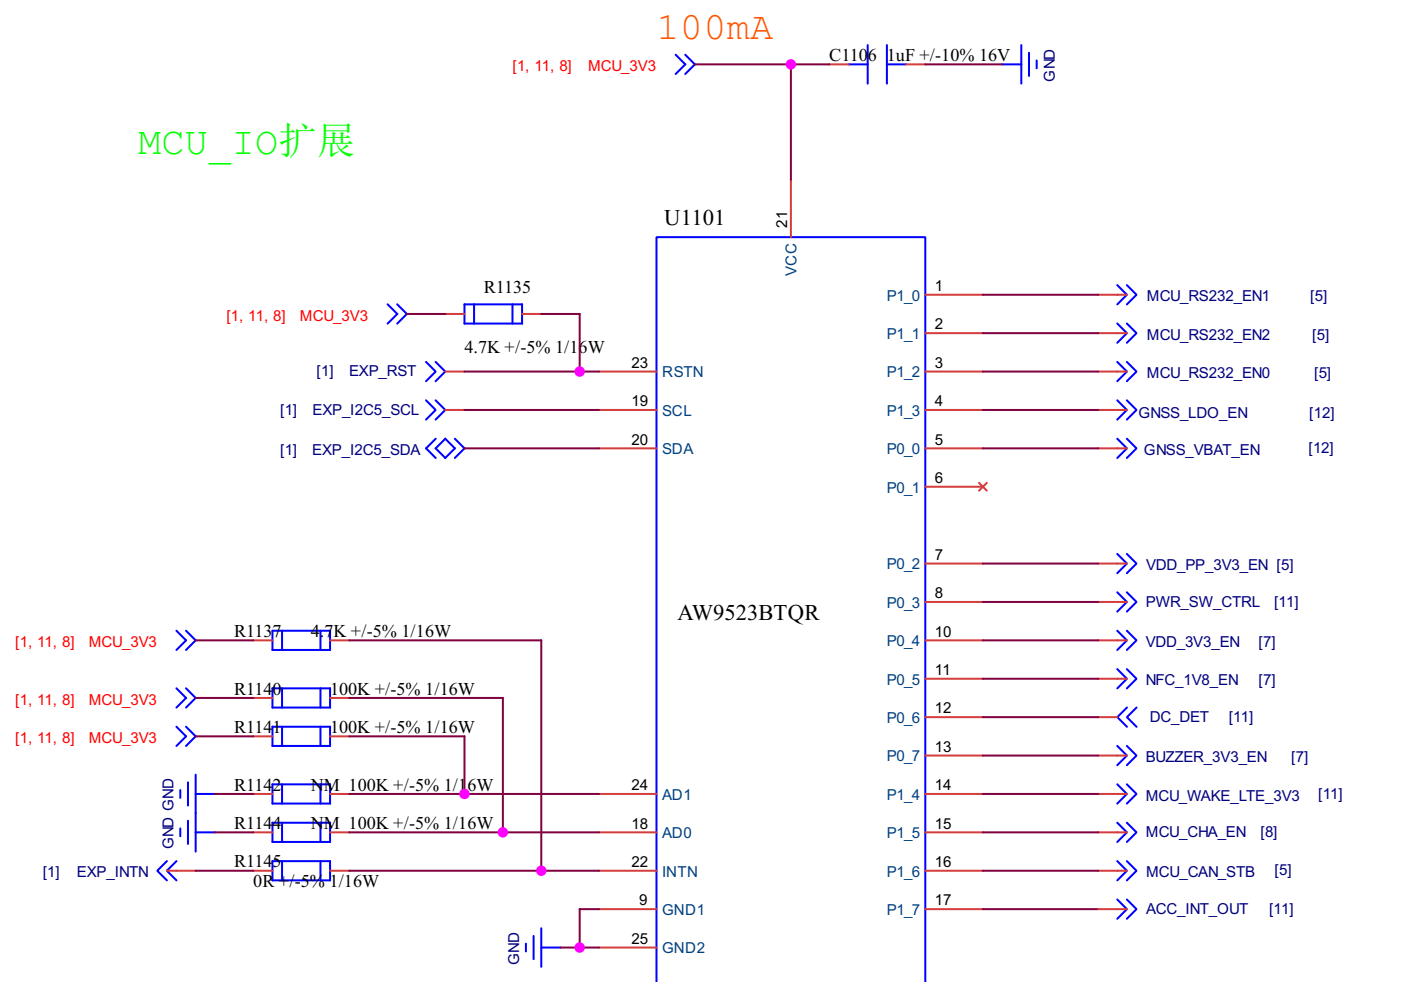


外部ACC中断输入检测

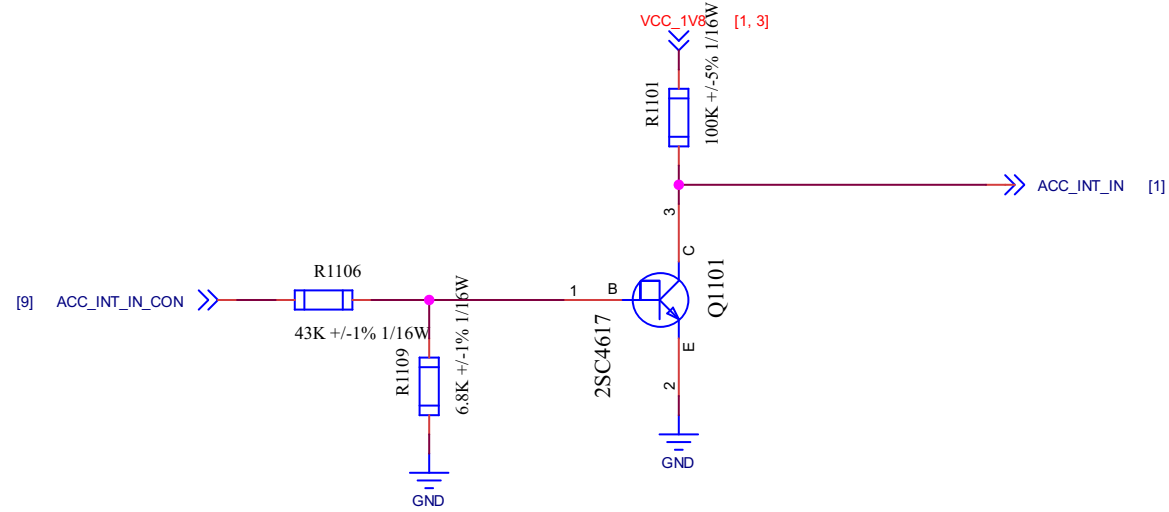


外部IO*3中断输入检测

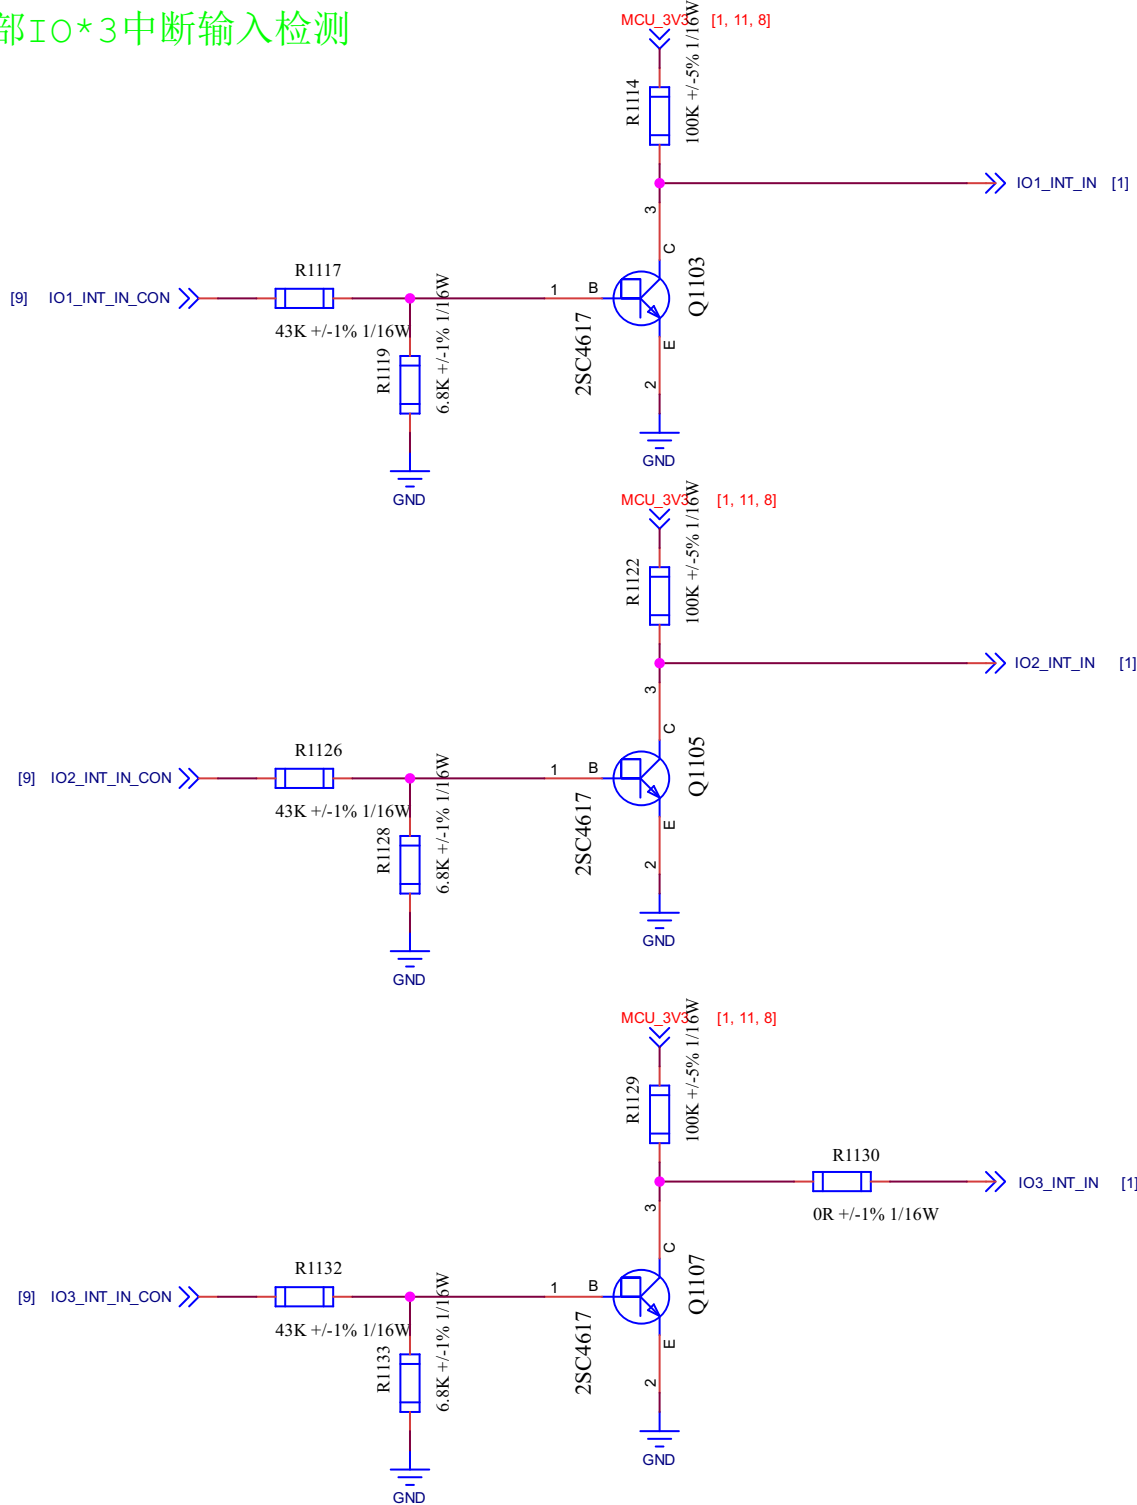


外部DC电源输入检测

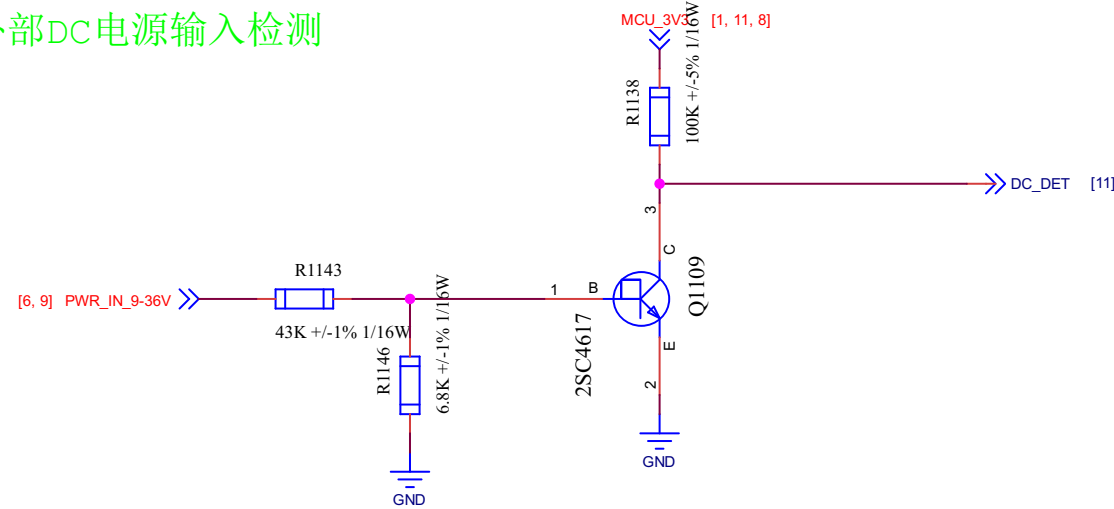


油量ADC输入采集

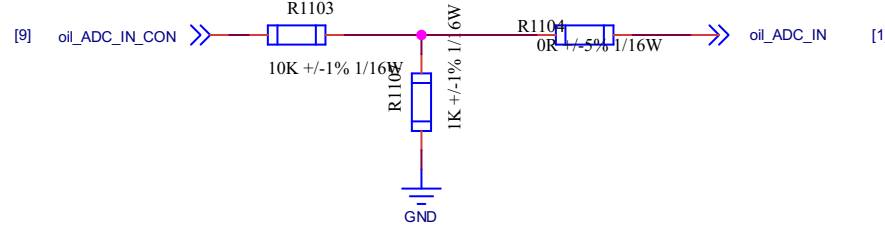


一线温度数据采集

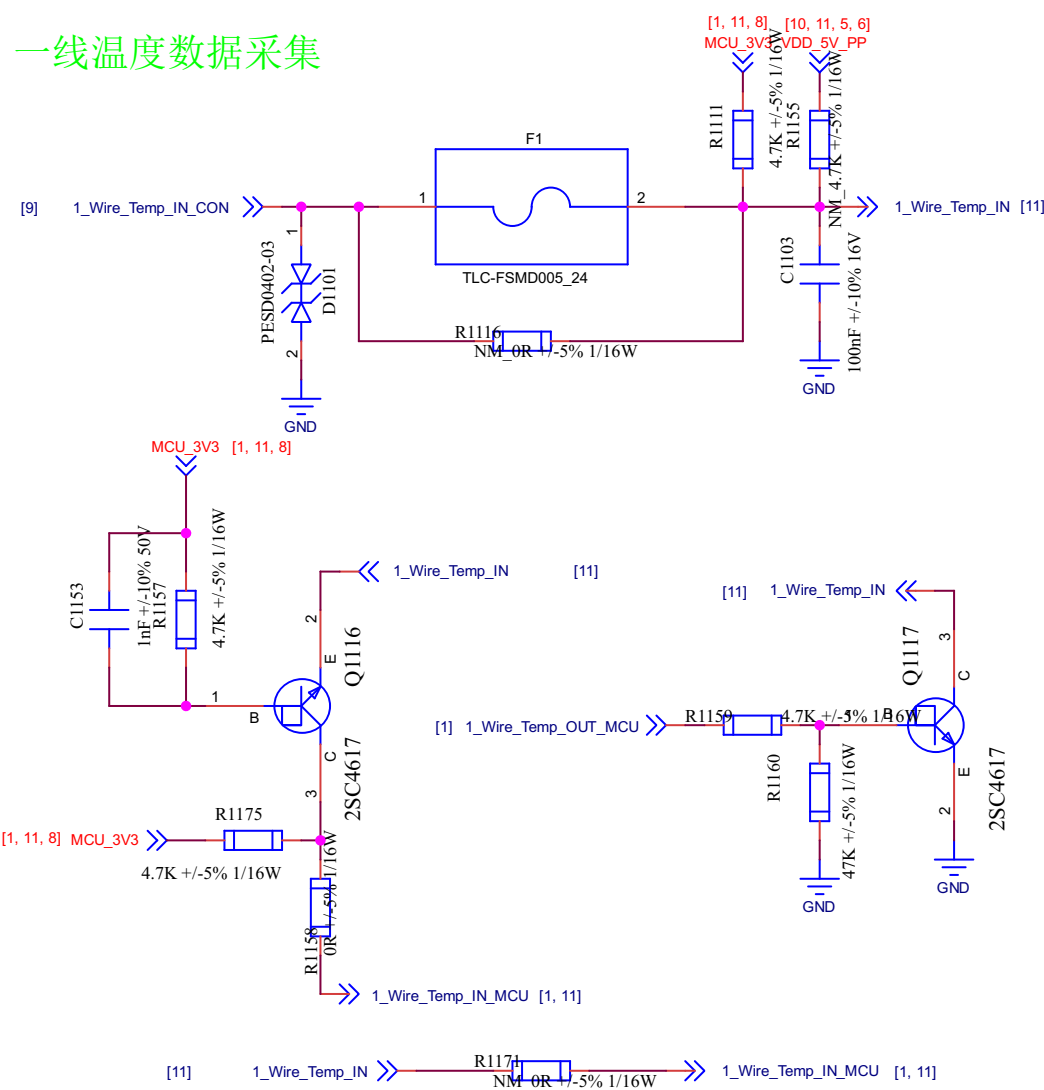

对外ACC信号输出

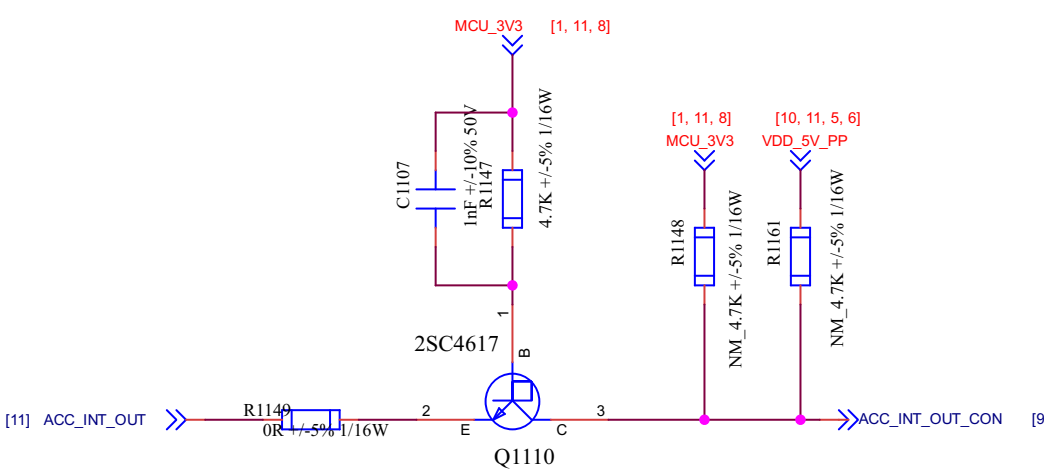





外部电源输入开关控制

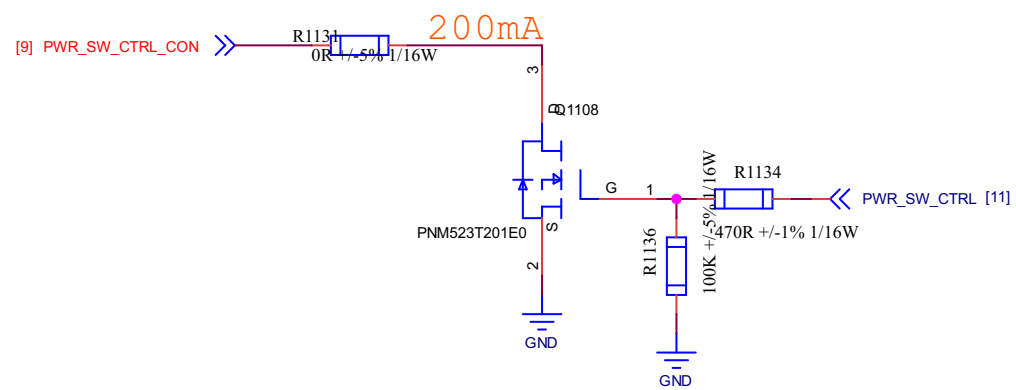

Quectel Wireless Solutions

PROJECT QEM800QA-FYN01AA-MB_SCH_V1.1_20260923		VER V1.1	
DRAWN BY Black		CHECKED BY Harry	
SIZE A2	DATE 2026-09-23	SHEET 11	OF 15


小板GNSS接口

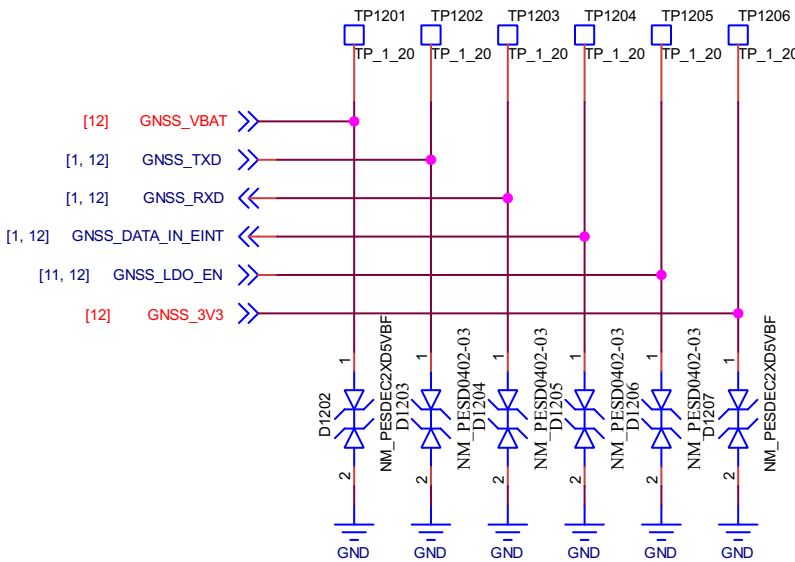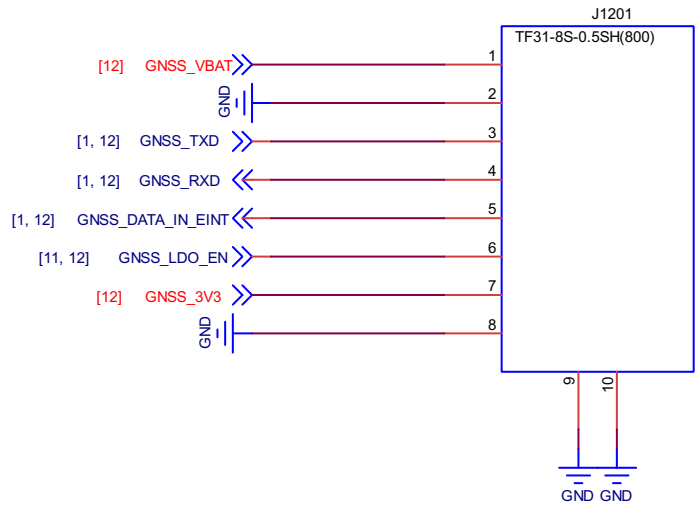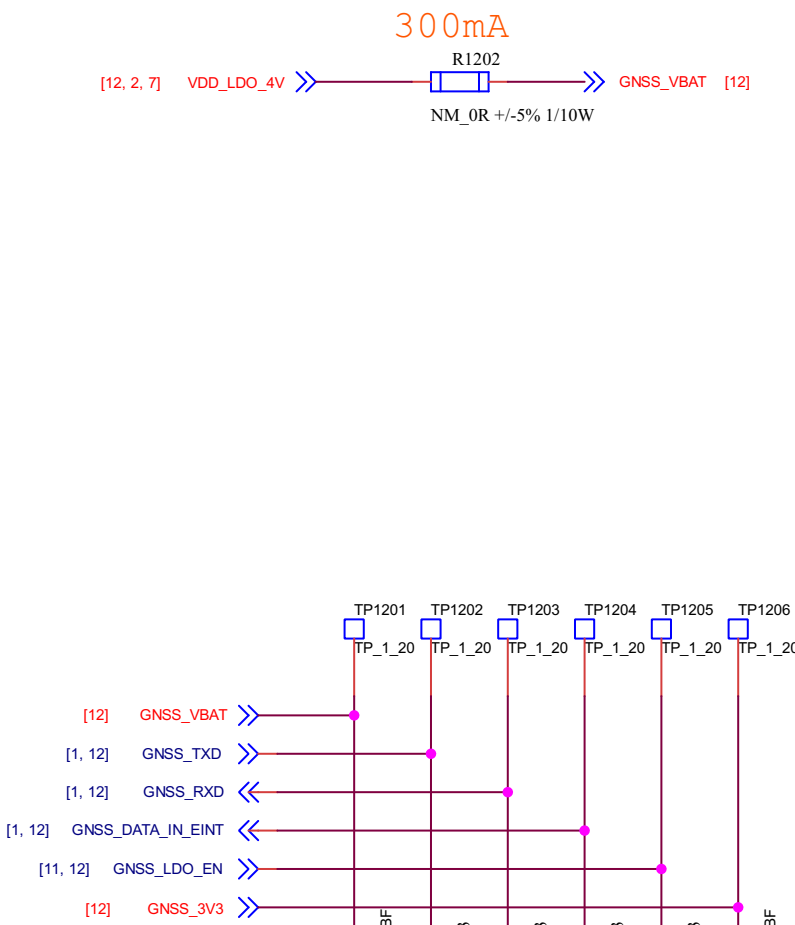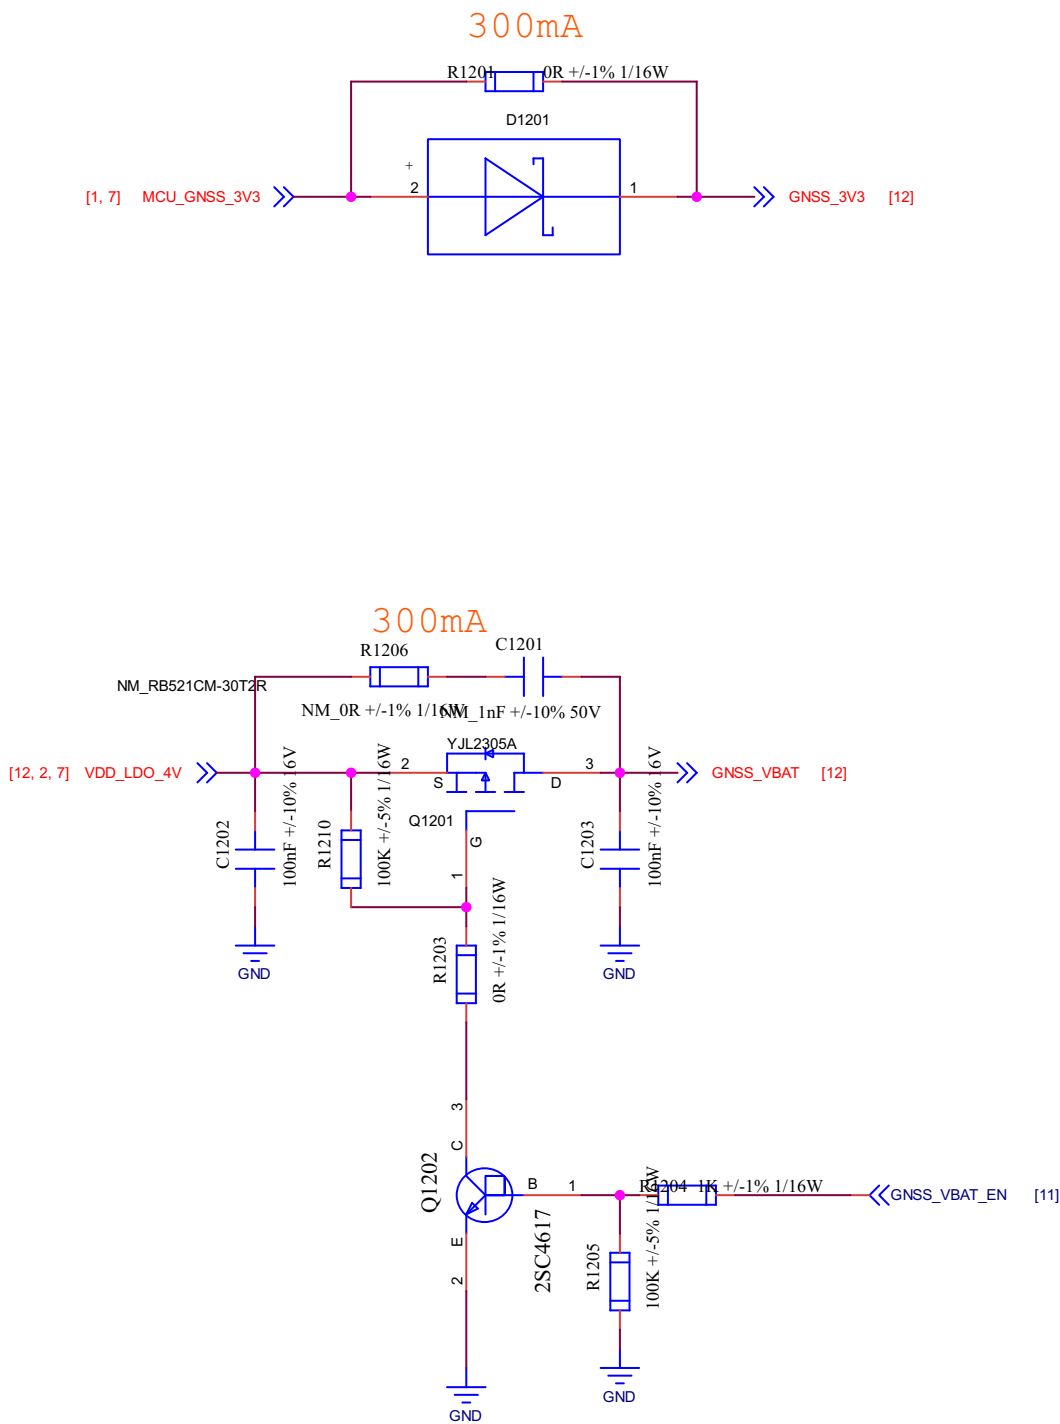


Quectel Wireless Solutions

PROJECT			VER		
QEM800QA-FYN01AA-MB_SCH_V1.1_20260923			V1.1		
DRAWN BY			CHECKED BY		
Black			Harry		
SIZE	A2	DATE	2026-09-23	SHEET	12 OF 15

钢片天线

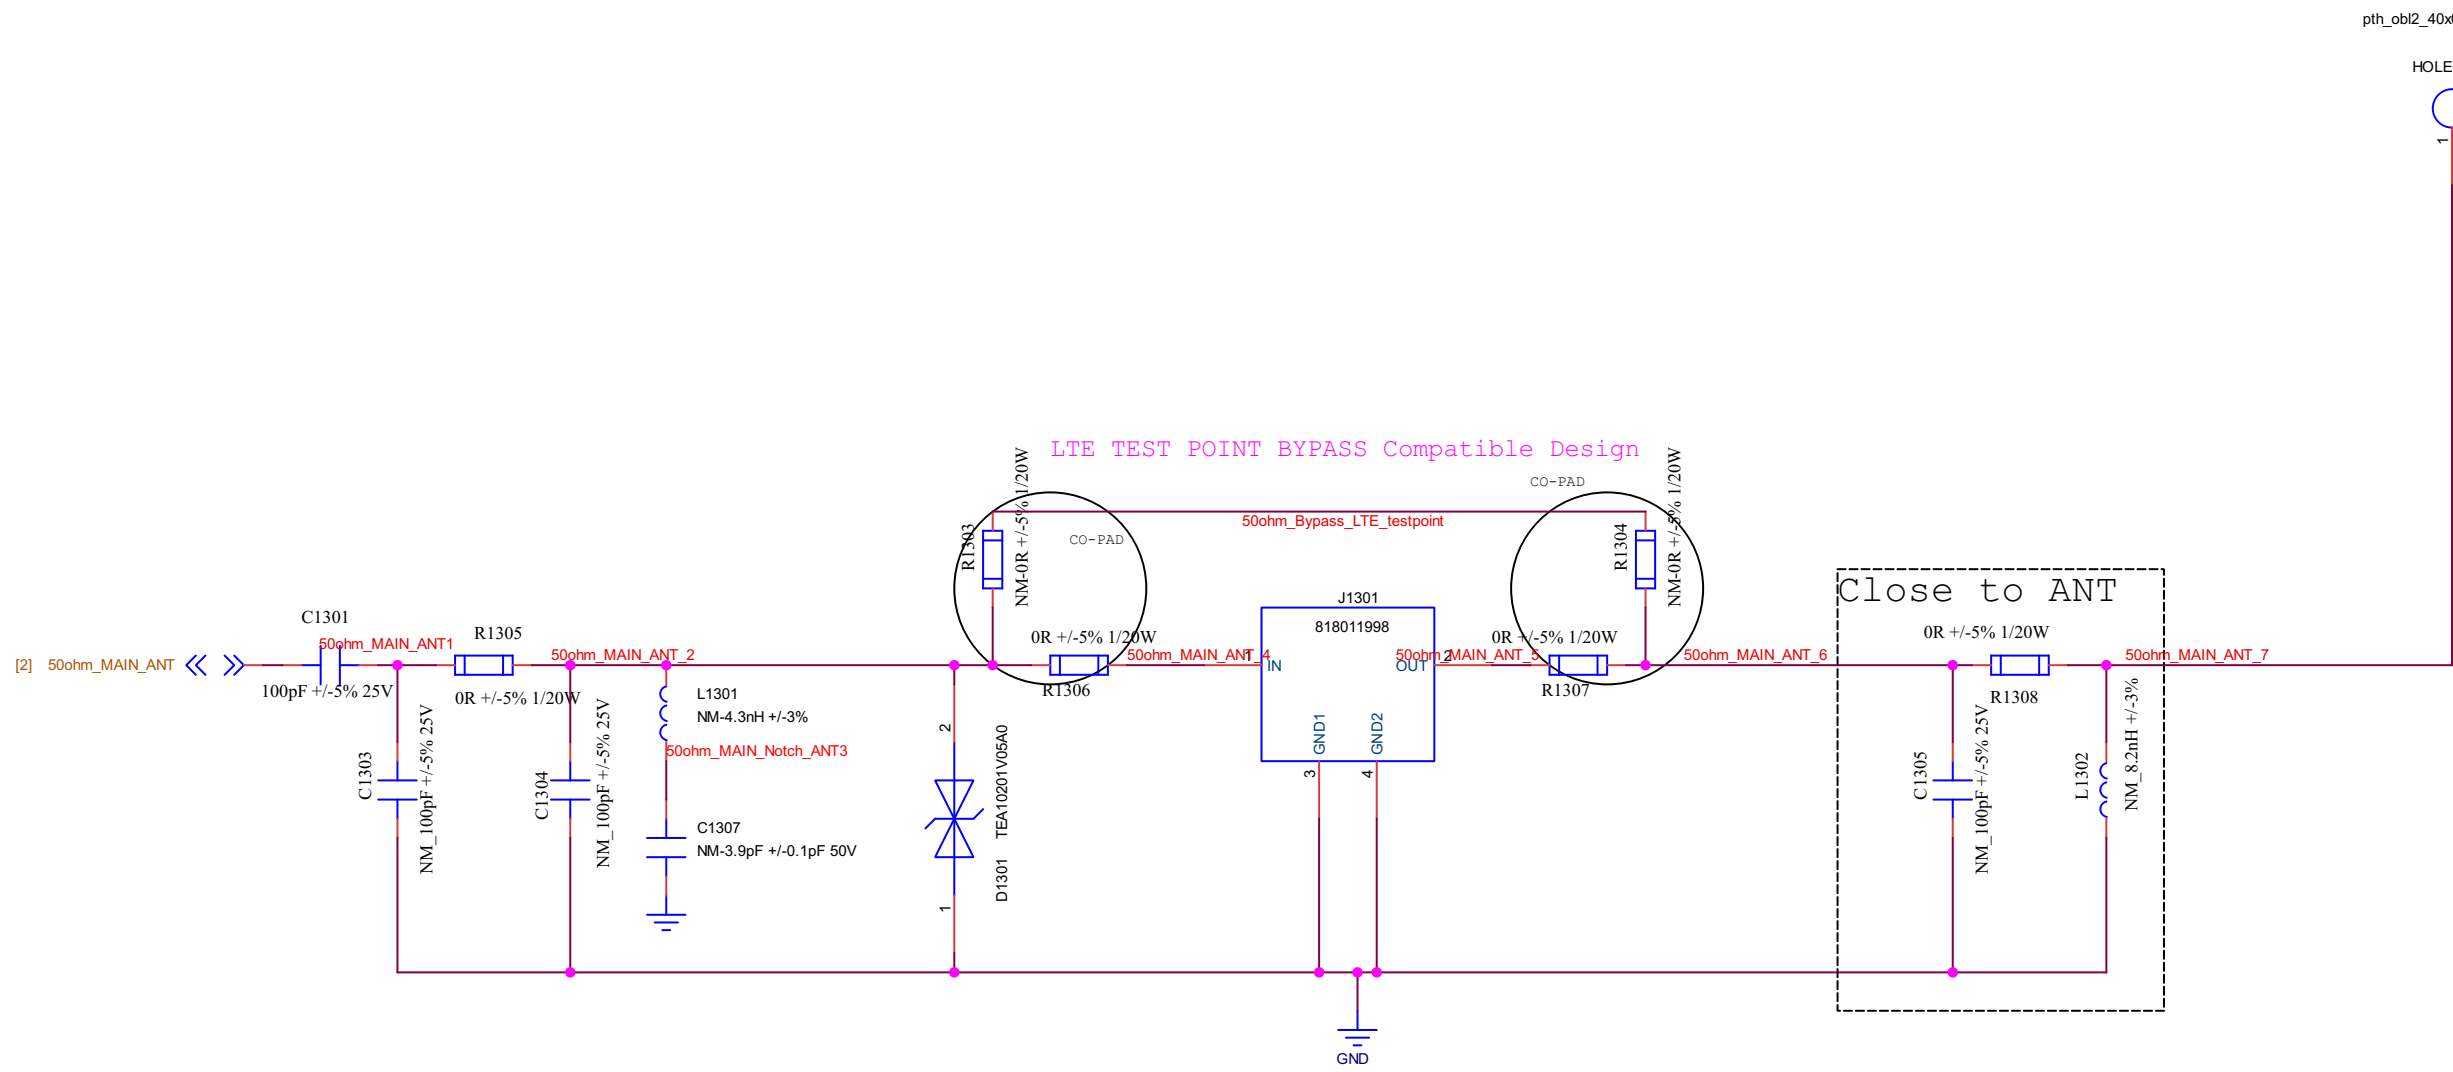


LTE ANT

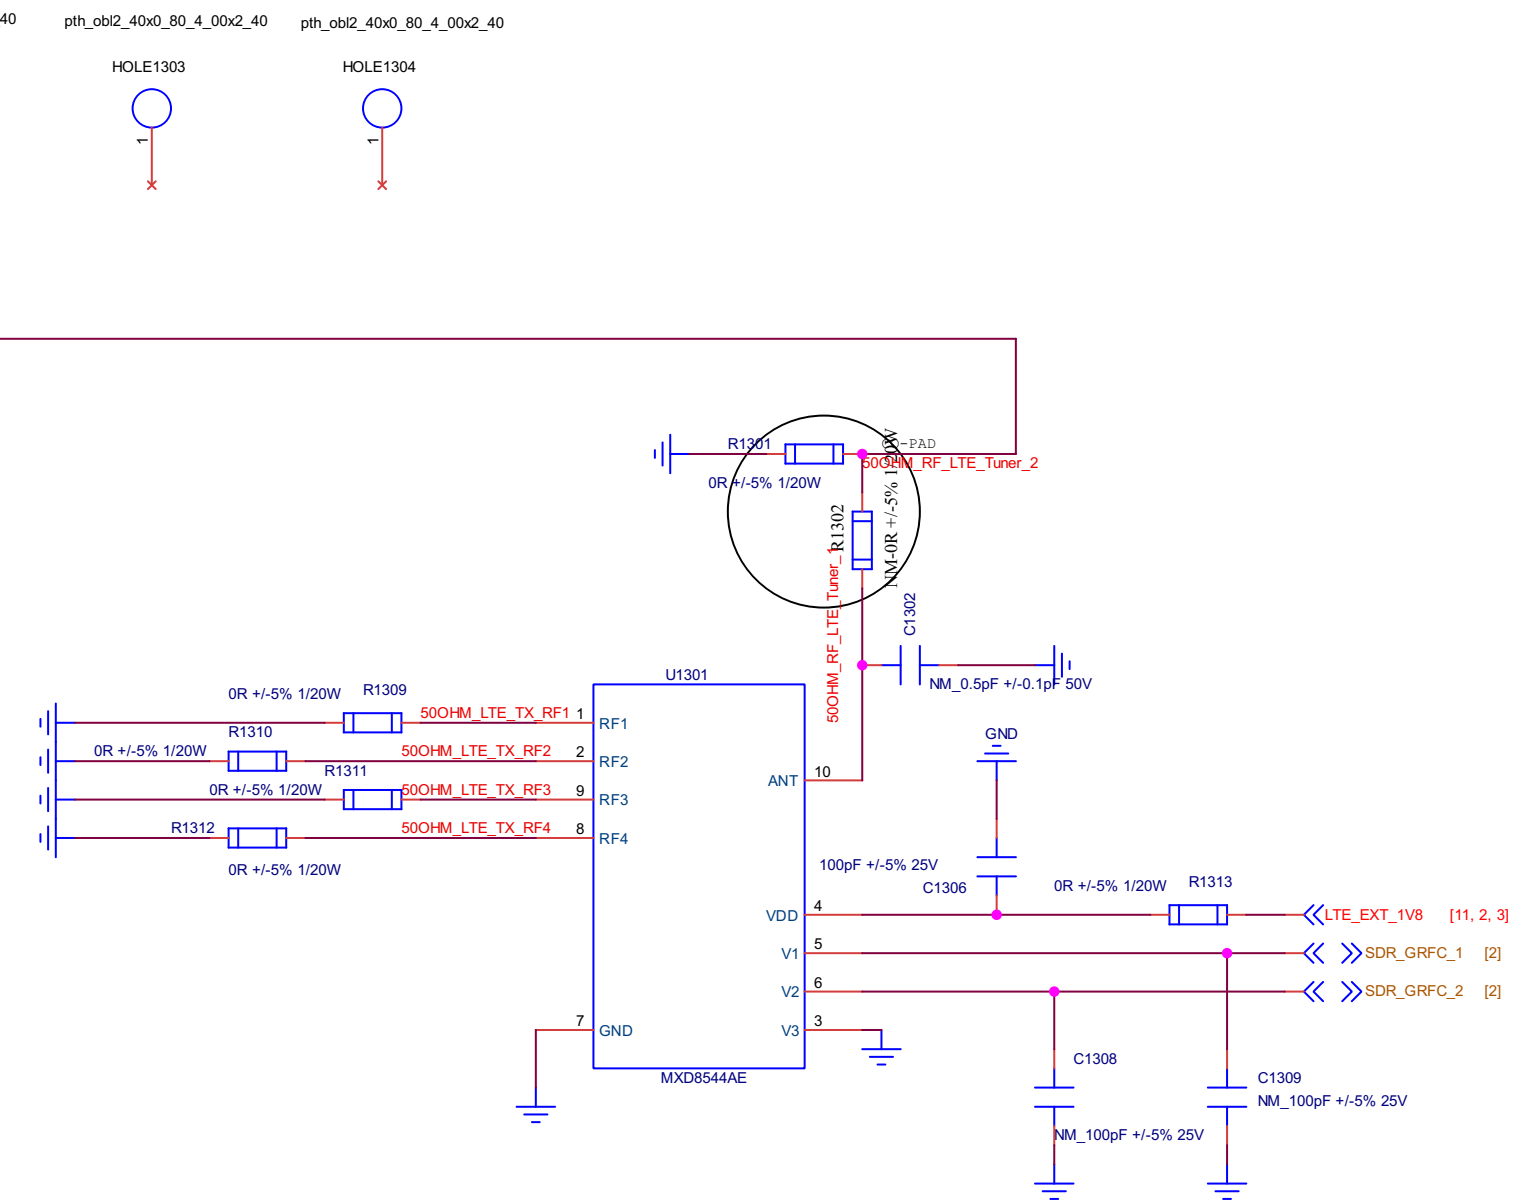

LTE Tuner RF

BT ANT

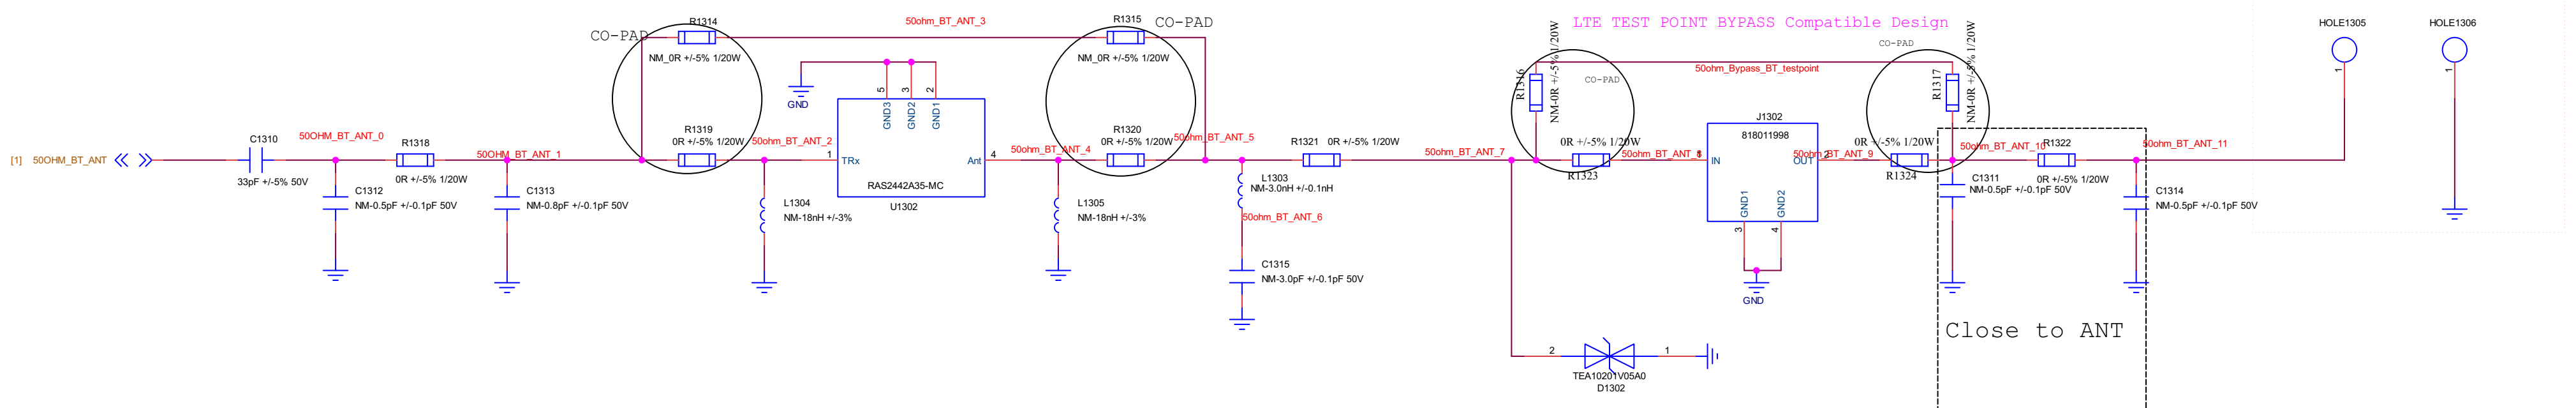




钢片天线

750PF没有， 暂用68PF+680PF ,5% ,100V ,0603封装

56/68/39PF， 1%精度的， 100V， 只有0603的封装


电阻都是0201封装， 与原厂确认

天线扣线不能超5mm,否则滤波电容68PF/39PF需要靠近天线放

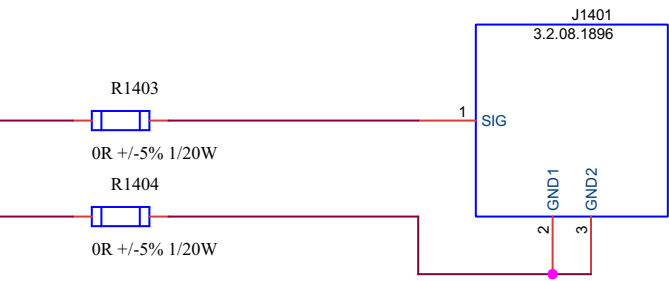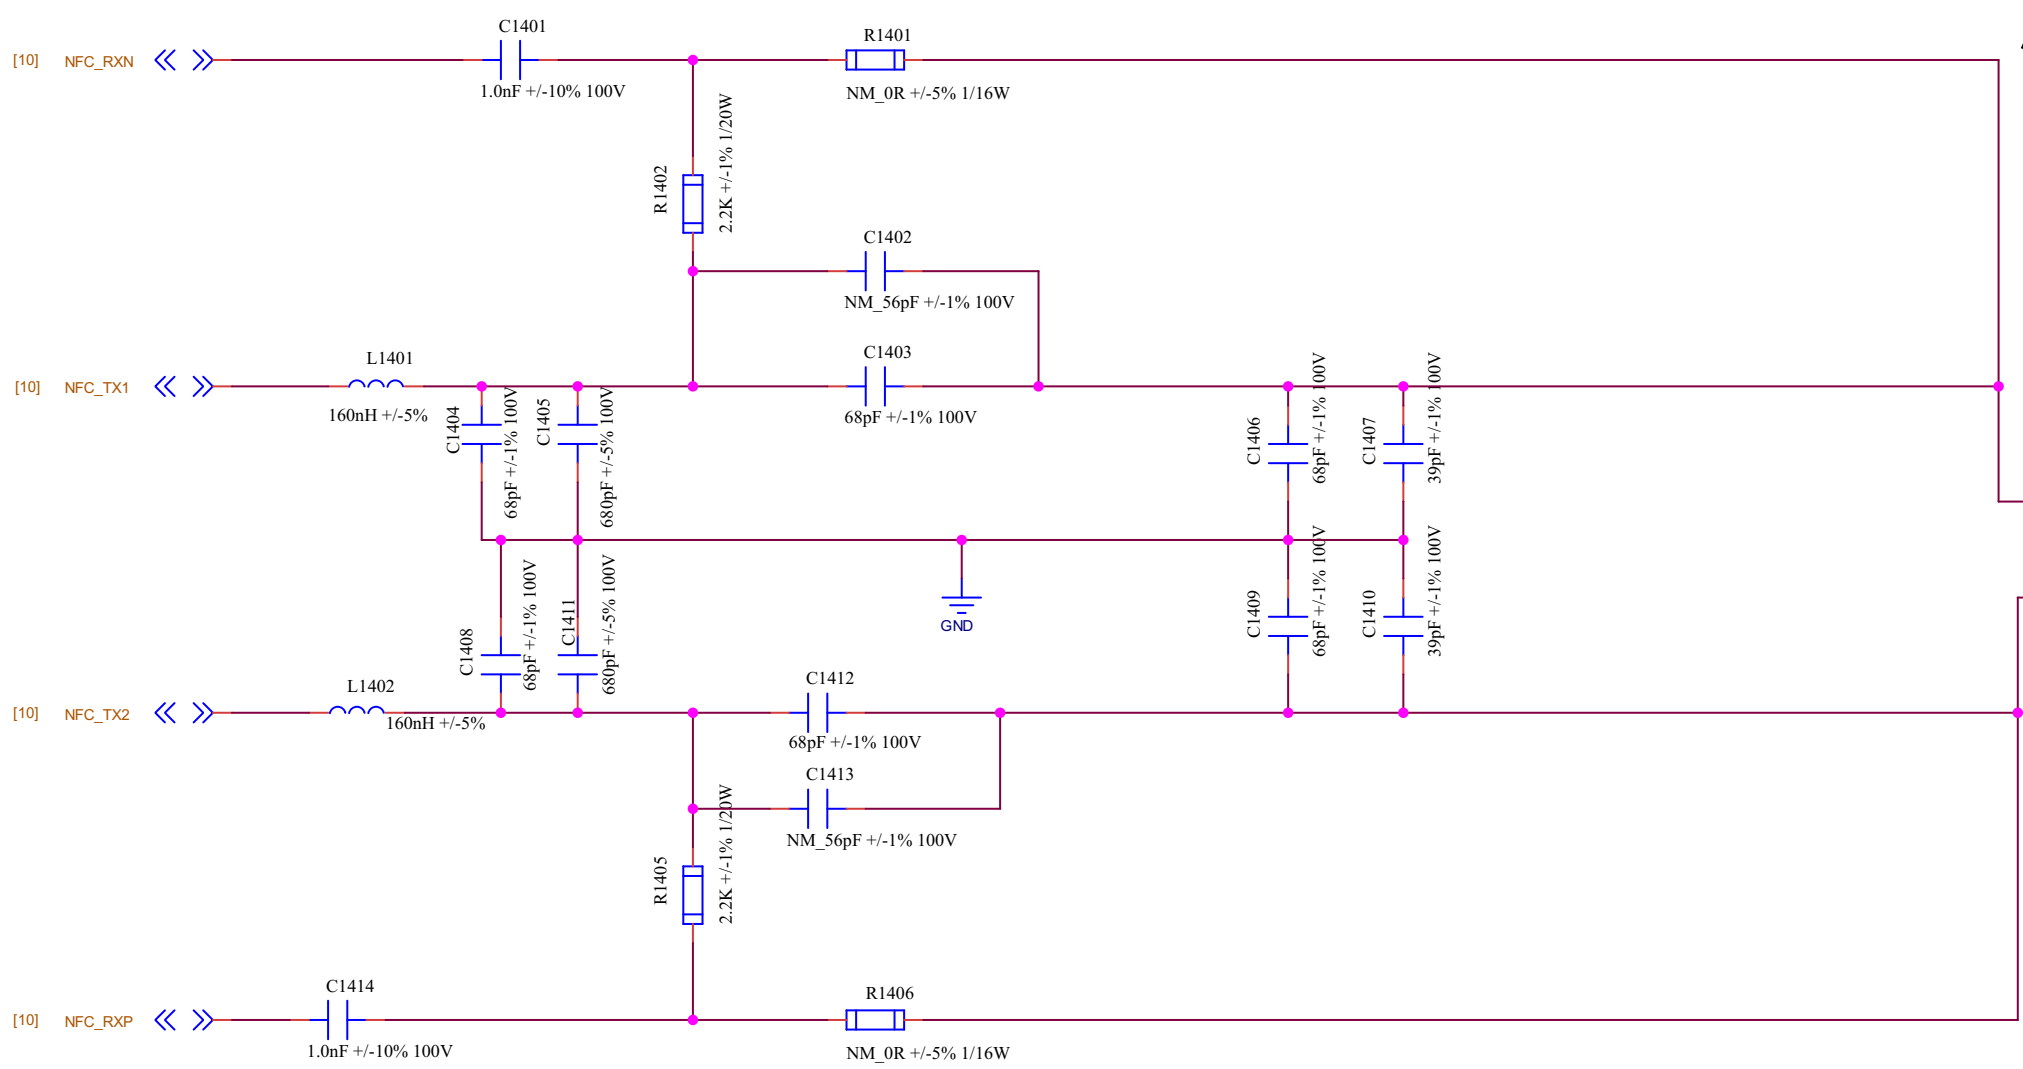

Quectel Wireless Solutions				
PROJECT			VER	
QEM800QA-FYN01AA-MB_SCH_V1.1_20260923			V1.1	
DRAWN BY			CHECKED BY	
Black			Harry	
SIZE	A2	DATE	2026-09-23	SHEET 14 OF 15

系统框图

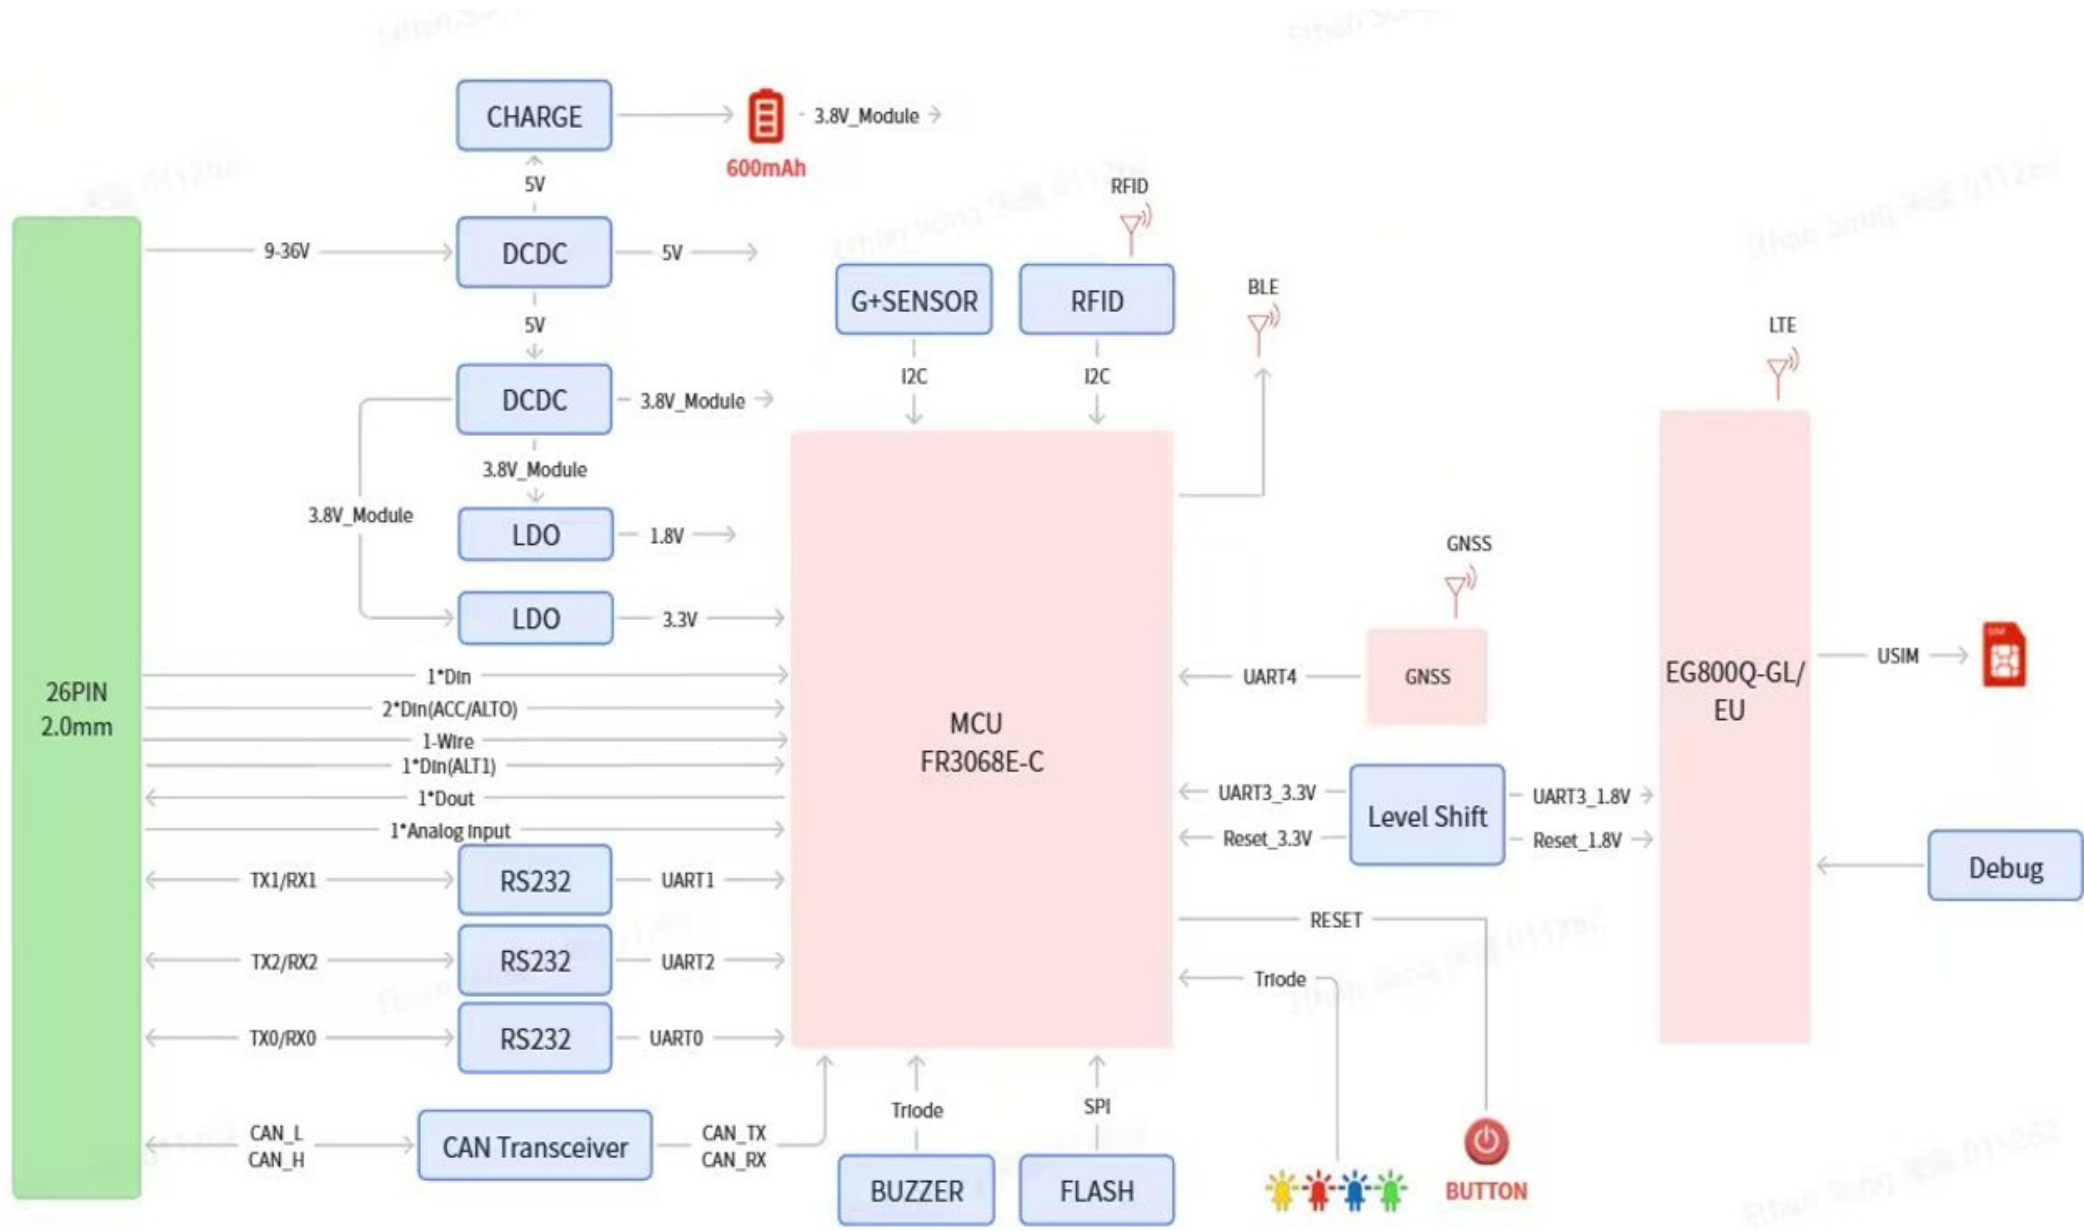

电源树

